

# Gradle User Manual

Version 4.9

Copyright © 2007-2018 Hans Dockter, Adam Murdoch

Gradle build tool source code is open and licensed under the Apache License 2.0. Gradle user manual and DSL references are licensed under Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License.

# Table of Contents

## About Gradle

- [Introduction](#)
- [Overview](#)

## Working with existing builds

- [Installing Gradle](#)
- [Command-Line Interface](#)
- [The Gradle Wrapper](#)
- [The Gradle Daemon](#)
- [Dependency Management for Java Projects](#)
- [Executing Multi-Project Builds](#)
- [Composite builds](#)
- [Build Environment](#)
- [Troubleshooting](#)
- [Embedding Gradle using the Tooling API](#)
- [Build Cache](#)

## Writing Gradle build scripts

- [Build Script Basics](#)
- [Build Init Plugin](#)
- [Writing Build Scripts](#)
- [Authoring Tasks](#)
- [Working With Files](#)
- [Using Ant from Gradle](#)
- [Build Lifecycle](#)
- [Logging](#)
- [Authoring Multi-Project Builds](#)
- [Using Gradle Plugins](#)
- [Standard Gradle plugins](#)
- [The Project Report Plugin](#)
- [The Build Dashboard Plugin](#)
- [Comparing Builds](#)
- [Publishing](#)
- [Ivy Publish Plugin](#)
- [Maven Publish Plugin](#)
- [The Signing Plugin](#)
- [The Distribution Plugin](#)
- [The Announce Plugin](#)
- [The Build Announcements Plugin](#)
- [Legacy publishing](#)
- [Maven Plugin](#)

## Dependency management

- [Introduction to Dependency Management](#)
- [Declaring Dependencies](#)
- [Managing Dependency Configurations](#)
- [Declaring Repositories](#)
- [Inspecting Dependencies](#)
- [Managing Transitive Dependencies](#)
- [Dependency Locking](#)
- [Working with Dependencies](#)
- [Customizing Dependency Resolution Behavior](#)
- [Troubleshooting Dependency Resolution](#)

## Extending the build

- Writing Custom Task Classes
- Writing Custom Plugins
- Gradle Plugin Development Plugin
- Lazy Configuration
- Task Configuration Avoidance
- Initialization Scripts
- Testing Build Logic with TestKit

## Building JVM projects

- Java Quickstart
- Building Java & JVM projects
- Testing in Java & JVM projects
- The Base Plugin
- The Java Plugin
- The Java Library Plugin
- Web Application Quickstart
- The War Plugin
- The Ear Plugin
- The Jetty Plugin
- The Application Plugin
- The Java Library Distribution Plugin
- Groovy Quickstart
- The Groovy Plugin
- The Scala Plugin
- The ANTLR Plugin
- The Checkstyle Plugin
- The CodeNarc Plugin
- The FindBugs Plugin
- The JDepend Plugin
- The PMD Plugin
- The JaCoCo Plugin
- The OSGi Plugin
- The Eclipse Plugins
- The IDEA Plugin

## Best practices

- Authoring Maintainable Build Scripts
- Organizing Gradle Projects

## The Software model

- Rule based model configuration
- Software model concepts
- Implementing model rules in a plugin
- Building Play applications
- Building native software
- Extending the software model

## Glossary

- Dependency Management Terminology
- Dependency Types
- Repository Types
- The Dependency Cache

## Appendix

- A. Gradle Samples
- B. Potential Traps
- C. The Feature Lifecycle
- D. Documentation licenses

## List of Examples

1. Excluding tasks
2. Abbreviated camel case task name
3. Obtaining detailed help for tasks
4. Information about properties
5. Running the Wrapper task
6. The generated distribution URL
7. Providing options to Wrapper task
8. The generated distribution URL
9. Executing the build with the Wrapper batch file
10. Upgrading the Wrapper version
11. Checking the Wrapper version after upgrading
12. Customizing the Wrapper task
13. The generated distribution URL
14. Specifying the HTTP Basic Authentication credentials using system properties
15. Specifying the HTTP Basic Authentication credentials in `distributionUrl`
16. Configuring SHA-256 checksum verification
17. Dependency declarations for a Java-based project
18. Definition of a module dependency
19. Usage of Maven central repository
20. Usage of a local Ivy directory
21. Publishing to a Maven repository
22. Listing the projects in a build
23. Dependencies of my-app
24. Declaring a command-line composite
25. Declaring a separate composite
26. Depending on task from included build
27. Build that does not declare group attribute
28. Declaring the substitutions for an included build
29. Depending on a single task from an included build
30. Depending on a tasks with path in all included builds
31. Setting properties with a gradle.properties file
32. Specifying system properties in `gradle.properties`
33. Setting a project property via gradle.properties
34. Setting a project property via environment variable
35. Changing JVM settings for Gradle client JVM
36. Changing JVM settings for forked Gradle JVMs
37. Set Java compile options for `JavaCompile` tasks
38. Prevent releasing outside of CI
39. Configuring an HTTP proxy using `gradle.properties`

40. Configuring an HTTPS proxy using `gradle.properties`
41. Using the tooling API
42. Configure the local cache
43. Load from HttpBuildCache
44. Configure remote HTTP cache
45. Allow untrusted SSL certificate for HttpBuildCache
46. Recommended setup for CI push use case
47. Consistent setup for buildSrc and main build
48. Init script to configure the build cache
49. Your first build script
50. Execution of a build script
51. A task definition shortcut
52. Using Groovy in Gradle's tasks
53. Using Groovy in Gradle's tasks
54. Declaration of task that depends on other task
55. Lazy dependsOn - the other task does not exist (yet)
56. Dynamic creation of a task
57. Accessing a task via API - adding a dependency
58. Accessing a task via API - adding behaviour
59. Accessing task as a property of the build script
60. Adding extra properties to a task
61. Using AntBuilder to execute ant.loadfile target
62. Using methods to organize your build logic
63. Defining a default task
64. Different outcomes of build depending on chosen tasks
65. Declaring external dependencies for the build script
66. A build script with external dependencies
67. Accessing property of the Project object
68. Using local variables
69. Using extra properties
70. Configuring arbitrary objects
71. Configuring arbitrary objects using a script
72. Groovy JDK methods
73. Property accessors
74. Method call without parentheses
75. List and map literals
76. Closure as method parameter
77. Closure delegates
78. Defining tasks
79. Defining tasks - using strings for task names
80. Defining tasks with alternative syntax
81. Accessing tasks as properties
82. Accessing tasks via tasks collection
83. Accessing tasks by path
84. Creating a copy task

85. Configuring a task - various ways
86. Configuring a task - with closure
87. Defining a task with closure
88. Task class with @Inject constructor
89. Creating a task with constructor arguments using TaskContainer
90. Creating a task with constructor arguments using Map
91. Creating a task with constructor arguments using Kotlin DSL
92. Adding dependency on task from another project
93. Adding dependency using task object
94. Adding dependency using closure
95. Adding a 'must run after' task ordering
96. Adding a 'should run after' task ordering
97. Task ordering does not imply task execution
98. A 'should run after' task ordering is ignored if it introduces an ordering cycle
99. Adding a description to a task
100. Overwriting a task
101. Skipping a task using a predicate
102. Skipping tasks with StopExecutionException
103. Enabling and disabling tasks
104. Custom task class
105. Ad-hoc task
106. Ad-hoc task declaring a destroyable
107. Using runtime API with custom task type
108. Using skipWhenEmpty() via the runtime API
109. Inferred task dependency via task outputs
110. Inferred task dependency via a task argument
111. Declaring a method to add task inputs
112. Declaring a method to add a task as an input
113. Failed attempt at setting up an inferred task dependency
114. Setting up an inferred task dependency between output dir and input files
115. Setting up an inferred task dependency with filesFor()
116. Setting up an inferred task dependency with builtBy()
117. Ignoring up-to-date checks
118. Runtime classpath normalization
119. Task rule
120. Dependency on rule based tasks
121. Adding a task finalizer
122. Task finalizer for a failing task
123. How to copy a single file
124. Using implicit string paths
125. Prefer task/project properties over hard-coded paths
126. Using multiple arguments with from()
127. Using a flat filter
128. Using a deep filter
129. Copying an entire directory

130. Copying an entire directory, including itself
131. Archiving a directory as a ZIP
132. Using the Base Plugin for its archive name convention
133. Unpacking a ZIP file
134. Creating a Java uber or fat JAR
135. Manually creating a directory
136. Moving a directory using the Ant task
137. Renaming files as they are copied
138. Truncating filenames as they are copied
139. Deleting a directory
140. Deleting files matching a specific pattern
141. How to minimize the number of hard-coded paths in your build
142. Locating files
143. Creating a path relative to a parent project
144. Creating a file collection
145. Implementing a file collection
146. Using a file collection
147. Filtering a file collection
148. Creating a file tree
149. Changing Ant default exclusions for a copy task
150. Using a file tree
151. Using an archive as a file tree
152. Specifying a set of files
153. Appending a set of files
154. Specifying copy task source files and destination directory
155. Selecting the files to copy
156. Renaming files as they are copied
157. Filtering files as they are copied
158. Sharing copy specifications
159. Sharing copy patterns only
160. Nested copy specs
161. Copying files using the copy() method without up-to-date check
162. Copying files using the copy() method with up-to-date check
163. Using the Sync task to copy dependencies
164. Archiving a directory as a ZIP
165. Creation of ZIP archive
166. Configuration of archive task - custom archive name
167. Configuration of archive task - appendix & classifier
168. Activating reproducible archives
169. Using an Ant task
170. Passing nested text to an Ant task
171. Passing nested elements to an Ant task
172. Using an Ant type
173. Using a custom Ant task
174. Declaring the classpath for a custom Ant task



175. Using a custom Ant task and dependency management together
176. Importing an Ant build
177. Task that depends on Ant target
178. Adding behaviour to an Ant target
179. Ant target that depends on Gradle task
180. Renaming imported Ant targets
181. Setting an Ant property
182. Getting an Ant property
183. Setting an Ant reference
184. Getting an Ant reference
185. Fine tuning Ant logging
186. Single project build
187. Hierarchical layout
188. Flat layout
189. Lookup of elements of the project tree
190. Modification of elements of the project tree
191. Adding of test task to each project which has certain property set
192. Notifications
193. Setting of certain property to all tasks
194. Logging of start and end of each task execution
195. Using stdout to write log messages
196. Writing your own log messages
197. Writing a log message with placeholder
198. Using SLF4J to write log messages
199. Configuring standard output capture
200. Configuring standard output capture for a task
201. Customizing what Gradle logs
202. Multi-project tree - water & bluewhale projects
203. Build script of water (parent) project
204. Multi-project tree - water, bluewhale & krill projects
205. Water project build script
206. Defining common behavior of all projects and subprojects
207. Defining specific behaviour for particular project
208. Defining specific behaviour for project krill
209. Adding custom behaviour to some projects (filtered by project name)
210. Adding custom behaviour to some projects (filtered by project properties)
211. Running build from subproject
212. Evaluation and execution of projects
213. Evaluation and execution of projects
214. Running tasks by their absolute path
215. Dependencies and execution order
216. Dependencies and execution order
217. Dependencies and execution order
218. Dependencies - real life example - crossproject configuration
219. Project lib dependencies

- 220. Project lib dependencies
- 221. Fine grained control over dependencies
- 222. Task generating a property file containing build information
- 223. Declaring a project dependency on the project producing the properties file
- 224. Build and Test Single Project
- 225. Build and Test Depended On Projects
- 226. Build and Test Dependent Projects
- 227. Applying a script plugin
- 228. Applying a core plugin
- 229. Applying a community plugin
- 230. Applying plugins only on certain subprojects.
- 231. Configuring pluginManagement per-project and globally
- 232. Using plugins from custom plugin repositories.
- 233. Plugin resolution strategy.
- 234. Complete Plugin Publishing Sample
- 235. Applying a binary plugin
- 236. Applying a binary plugin by type
- 237. Applying a plugin with the buildscript block
- 238. Using the Build Dashboard plugin
- 239. Applying the necessary plugins
- 240. Configuring a Java library for publishing
- 241. Adding an additional archive artifact to a MavenPublication
- 242. Defining a custom artifact for a configuration
- 243. Attaching a custom PublishArtifact to a publication
- 244. Signing a publication
- 245. Sign and publish a project
- 246. Adding multiple publications and repositories
- 247. Configuring which artifacts should be published to which repositories
- 248. Defining your own shorthand tasks for publishing
- 249. Configuring a dynamically named task created by the publishing plugins
- 250. Applying the Ivy Publish Plugin
- 251. customizing the publication identity
- 252. Customizing the module descriptor file
- 253. Declaring repositories to publish to
- 254. Publishing a Java module
- 255. Example generated ivy.xml
- 256. Applying the Maven Publish Plugin
- 257. customizing the publication identity
- 258. Customizing the POM file
- 259. Declaring repositories to publish to
- 260. Configuring repository URL based on project version
- 261. Configuring repository URL based on project property
- 262. Publishing a Java library
- 263. Using the Signing Plugin
- 264. Sign with GnuPG

- 265. Configure the GnupgSignatory
- 266. Signing a publication
- 267. Signing a publication output
- 268. Signing a configuration
- 269. Signing a configuration output
- 270. Signing a task
- 271. Signing a task output
- 272. Specifying when signing is required
- 273. Specifying when signing is skipped
- 274. Signing a POM for deployment
- 275. Using the Distribution Plugin
- 276. Adding extra distributions
- 277. Configuring the main distribution
- 278. Adding distribution archives to an Ivy publication
- 279. Adding distribution archives to a Maven publication
- 280. Publishing the distribution ZIP with the Maven Plugin
- 281. Applying the announce plugin
- 282. Configure the announce plugin
- 283. Using the announce plugin
- 284. Using the build announcements plugin
- 285. Using the build announcements plugin from an init script
- 286. Defining an artifact using an archive task
- 287. Defining an artifact using a file
- 288. Customizing an artifact
- 289. Map syntax for defining an artifact using a file
- 290. Configuration of the upload task
- 291. Using the Maven plugin
- 292. Creating a standalone pom.
- 293. Upload of file to remote Maven repository
- 294. Upload of file via SSH
- 295. Customization of pom
- 296. Builder style customization of pom
- 297. Modifying auto-generated content
- 298. Customization of Maven installer
- 299. Generation of multiple poms
- 300. Accessing a mapping configuration
- 301. Declaring a dependency with a concrete version
- 302. Declaring a dependency without version
- 303. Declaring a dependency with a dynamic version
- 304. Declaring a dependency with a changing version
- 305. Declaring multiple file dependencies
- 306. Declaring project dependencies
- 307. Resolving a JavaScript artifact for a declared dependency
- 308. Resolving a JavaScript artifact with classifier for a declared dependency
- 309. Declaring and using a custom configuration

- 310. Extending a configuration from another configuration
- 311. Declaring JCenter repository as source for resolving dependencies
- 312. Declaring a custom repository by URL
- 313. Declaring multiple repositories
- 314. Declaring the JGit dependency with a custom configuration
- 315. Rendering the dependency report for a custom configuration
- 316. Declaring the JGit dependency and a conflicting dependency
- 317. Using the dependency insight report for a given dependency
- 318. Giving a reason for choosing a certain module version in a dependency declaration
- 319. Using the dependency insight report with custom reasons
- 320. Define dependency constraints
- 321. Unresolved artifacts for transitive dependencies
- 322. Excluding transitive dependency for a particular dependency declaration
- 323. Excluding transitive dependency for a particular configuration
- 324. Enforcing a dependency version
- 325. Enforcing a dependency version on the configuration-level
- 326. Disabling transitive dependency resolution for a declared dependency
- 327. Disabling transitive dependency resolution on the configuration-level
- 328. Depending on a BOM to import its dependency constraints
- 329. Locking a specific configuration
- 330. Locking all configurations
- 331. Resolving all configurations
- 332. Lockfile content
- 333. Dynamic dependency declaration
- 334. Iterating over the dependencies assigned to a configuration
- 335. Iterating over the artifacts resolved for a module
- 336. Walking the resolved and unresolved dependencies of a configuration
- 337. Accessing a Maven module's metadata artifact
- 338. Forcing a consistent version for a group of libraries
- 339. Using a custom versioning scheme
- 340. Blacklisting a version with a replacement
- 341. Changing dependency group and/or name during resolution
- 342. Substituting a module with a project
- 343. Substituting a project with a module
- 344. Conditionally substituting a dependency
- 345. 'Latest' version selector
- 346. Custom status scheme
- 347. Custom status scheme by module
- 348. Ivy component metadata rule
- 349. Configuration of ComponentMetadataRule
- 350. Component selection rule
- 351. Component selection rule with module target
- 352. Component selection rule with metadata
- 353. Component selection rule using a rule source object
- 354. Declaring a module replacement

- 355. Specifying default dependencies on a configuration
- 356. Enabling dynamic resolve mode
- 357. Dynamic version cache control
- 358. Changing module cache control
- 359. Defining a custom task
- 360. A hello world task
- 361. A customizable hello world task
- 362. A build for a custom task
- 363. A custom task
- 364. Using a custom task in another project
- 365. Testing a custom task
- 366. Defining an incremental task action
- 367. Running the incremental task for the first time
- 368. Running the incremental task with unchanged inputs
- 369. Running the incremental task with updated input files
- 370. Running the incremental task with an input file removed
- 371. Running the incremental task with an output file removed
- 372. Running the incremental task with an input property changed
- 373. Declaring a command line option
- 374. Using a command line option
- 375. Declaring available values for an option
- 376. Listing available values for option
- 377. Creating a unit of work implementation
- 378. Submitting a unit of work for execution
- 379. Waiting for asynchronous work to complete
- 380. Submitting an item of work to run in a worker daemon
- 381. A custom plugin
- 382. A custom plugin extension
- 383. A custom plugin with configuration closure
- 384. Evaluating file properties lazily
- 385. Mapping extension properties to task properties
- 386. A build for a custom plugin
- 387. Wiring for a custom plugin
- 388. Using a custom plugin in another project
- 389. Applying a community plugin with the plugins DSL
- 390. Testing a custom plugin
- 391. Using the Java Gradle Plugin Development plugin
- 392. Nested DSL elements
- 393. Managing a collection of objects
- 394. Using the Java Gradle Plugin Development plugin
- 395. Using the gradlePlugin {} block.
- 396. Using a read-only and configurable property
- 397. Using file and directory property
- 398. Implicit task dependency
- 399. List property

- 400. Using init script to perform extra configuration before projects are evaluated
- 401. Declaring external dependencies for an init script
- 402. An init script with external dependencies
- 403. Using plugins in init scripts
- 404. Declaring the TestKit dependency
- 405. Declaring the JUnit dependency
- 406. Using GradleRunner with JUnit
- 407. Using GradleRunner with Spock
- 408. Making the code under test classpath available to the tests
- 409. Injecting the code under test classes into test builds
- 410. Injecting the code under test classes into test builds for Gradle versions prior to 2.8
- 411. Using the Java Gradle Development plugin for generating the plugin metadata
- 412. Automatically injecting the code under test classes into test builds
- 413. Reconfiguring the classpath generation conventions of the Java Gradle Development plugin
- 414. Specifying a Gradle version for test execution
- 415. Testing cacheable tasks
- 416. Clean build cache between tests
- 417. Using the Java plugin
- 418. Building a Java project
- 419. Adding Maven repository
- 420. Adding dependencies
- 421. Customization of MANIFEST.MF
- 422. Adding a test system property
- 423. Publishing the JAR file
- 424. Eclipse plugin
- 425. Java example - complete build file
- 426. Multi-project build - hierarchical layout
- 427. Multi-project build - settings.gradle file
- 428. Multi-project build - common configuration
- 429. Multi-project build - dependencies between projects
- 430. Multi-project build - distribution file
- 431. Applying the Java Plugin
- 432. Declaring dependencies
- 433. Declaring custom source directories
- 434. Declaring custom source directories additively
- 435. Setting Java compiler options
- 436. Configure Java 6 build
- 437. Defining a custom task to create a 'sources' JAR
- 438. Creating a Java uber or fat JAR
- 439. Customization of MANIFEST.MF
- 440. Creating a manifest object.
- 441. Separate MANIFEST.MF for a particular archive
- 442. Saving a MANIFEST.MF to disk
- 443. Using a custom doclet with Javadoc
- 444. Defining a custom Javadoc task

- 445. A basic configuration for the 'test' task
- 446. Filtering tests in the build script
- 447. Changing the default test report and results directories
- 448. Creating a unit test report for subprojects
- 449. JUnit Categories
- 450. JUnit Platform Tags
- 451. Grouping TestNG tests
- 452. Enabling JUnit Platform to run your tests
- 453. JUnit Jupiter dependencies
- 454. JUnit Vintage dependencies
- 455. Filter specific engines
- 456. Preserving order of TestNG tests
- 457. Grouping TestNG tests by instances
- 458. Setting up working integration tests
- 459. Defining a working integration test task
- 460. Skipping the unit tests based on a project property
- 461. Applying the Base Plugin
- 462. Using the Java plugin
- 463. Custom Java source layout
- 464. Assembling a JAR for a source set
- 465. Generating the Javadoc for a source set
- 466. Running tests in a source set
- 467. Registering incremental annotation processors
- 468. Registering incremental annotation processors dynamically
- 469. An isolated annotation processor
- 470. An aggregating annotation processor
- 471. Declaring annotation processors
- 472. Customization of MANIFEST.MF
- 473. Creating a manifest object.
- 474. Separate MANIFEST.MF for a particular archive
- 475. Saving a MANIFEST.MF to disk
- 476. Using the Java Library plugin
- 477. Declaring API and implementation dependencies
- 478. Making the difference between API and implementation
- 479. Declaring API and implementation dependencies
- 480. Configuring the Groovy plugin to work with Java Library
- 481. War plugin
- 482. Running web application with Gretty plugin
- 483. Using the War plugin
- 484. Customization of war plugin
- 485. Using the Ear plugin
- 486. Customization of ear plugin
- 487. Using the application plugin
- 488. Configure the application main class
- 489. Configure default JVM settings

- 490. Configure custom directory for start scripts
- 491. Include output from other tasks in the application distribution
- 492. Automatically creating files for distribution
- 493. Using the Java library distribution plugin
- 494. Configure the distribution name
- 495. Include files in the distribution
- 496. Groovy plugin
- 497. Dependency on Groovy
- 498. Groovy example - complete build file
- 499. Using the Groovy plugin
- 500. Custom Groovy source layout
- 501. Configuration of Groovy dependency
- 502. Configuration of Groovy test dependency
- 503. Configuration of bundled Groovy dependency
- 504. Configuration of Groovy file dependency
- 505. Configure Java 6 build for Groovy
- 506. Using the Scala plugin
- 507. Custom Scala source layout
- 508. Declaring a Scala dependency for production code
- 509. Declaring a Scala dependency for test code
- 510. Declaring a version of the Zinc compiler to use
- 511. Forcing a scala-library dependency for all configurations
- 512. Forcing a scala-library dependency for the zinc configuration
- 513. Adjusting memory settings
- 514. Forcing all code to be compiled
- 515. Configure Java 6 build for Scala
- 516. Explicitly specify a target IntelliJ IDEA version
- 517. Using the ANTLR plugin
- 518. Declare ANTLR version
- 519. setting custom max heap size and extra arguments for ANTLR
- 520. Using the Checkstyle plugin
- 521. Using the config\_loc property
- 522. Customizing the HTML report
- 523. Using the CodeNarc plugin
- 524. Using the FindBugs plugin
- 525. Customizing the HTML report
- 526. Using the JDepend plugin
- 527. Using the PMD plugin
- 528. Applying the JaCoCo plugin
- 529. Configuring JaCoCo plugin settings
- 530. Configuring test task
- 531. Configuring violation rules
- 532. Configuring test task
- 533. Using application plugin to generate code coverage data
- 534. Coverage reports generated by applicationCodeCoverageReport



- 535. Using the OSGi plugin
- 536. Configuration of OSGi MANIFEST.MF file
- 537. Using the Eclipse plugin
- 538. Using the Eclipse WTP plugin
- 539. Partial Overwrite for Classpath
- 540. Partial Overwrite for Project
- 541. Export Classpath Entries
- 542. Customizing the XML
- 543. Using the IDEA plugin
- 544. Partial Rewrite for Module
- 545. Partial Rewrite for Project
- 546. Export Dependencies
- 547. Customizing the XML
- 548. A build script using conditional logic to create a task
- 549. A binary plugin implementing imperative logic
- 550. A build script applying a plugin that encapsulates imperative logic
- 551. Definition of tasks following best practices
- 552. A task declaring the group and description
- 553. Executing logic during configuration should be avoided
- 554. Executing logic during execution phase is preferred
- 555. Integration test source set
- 556. Integration test task
- 557. Custom buildSrc build script
- 558. applying a rule source plugin
- 559. a model creation rule
- 560. a model mutation rule
- 561. creating a task
- 562. a managed type
- 563. a String property
- 564. a File property
- 565. a Long property
- 566. a boolean property
- 567. an int property
- 568. a managed property
- 569. an enumeration type property
- 570. a managed set
- 571. a scalar collection
- 572. strongly modelling sources sets
- 573. a DSL example applying a rule to every element in a scope
- 574. DSL configuration rule
- 575. Configuration run when required
- 576. Configuration not run when not required
- 577. DSL creation rule
- 578. DSL creation rule without initialization
- 579. Initialization before configuration

- 580. Nested DSL creation rule
- 581. Nested DSL configuration rule
- 582. DSL configuration rule for each element in a map
- 583. Nested DSL property configuration
- 584. a DSL example showing type conversions
- 585. a DSL rule using inputs
- 586. model task output
- 587. Using the Play plugin
- 588. The components report
- 589. Selecting a version of the Play Framework
- 590. Adding dependencies to a Play application
- 591. A Play 2.6 project
- 592. Adding Guice dependency in Play 2.6 project
- 593. Configuring extra source sets to a Play application
- 594. Adding extra source sets to a Play application
- 595. Configuring Scala compiler options
- 596. Configuring routes style
- 597. Configuring a custom asset pipeline
- 598. Configuring dependencies on Play subprojects
- 599. Add extra files to a Play application distribution
- 600. Applying both the Play and IDEA plugins
- 601. Defining a library component
- 602. Defining executable components
- 603. Sample build
- 604. Dependent components report
- 605. Dependent components report
- 606. Report of components that depends on the operators component
- 607. Report of components that depends on the operators component, including test suites
- 608. Assemble components that depends on the passing/static binary of the operators component
- 609. Build components that depends on the passing/static binary of the operators component
- 610. Adding a custom check task
- 611. Running checks for a given binary
- 612. The components report
- 613. The 'cpp' plugin
- 614. C++ source set
- 615. The 'c' plugin
- 616. C source set
- 617. The 'assembler' plugin
- 618. The 'objective-c' plugin
- 619. The 'objective-cpp' plugin
- 620. Settings that apply to all binaries
- 621. Settings that apply to all shared libraries
- 622. Settings that apply to all binaries produced for the 'main' executable component
- 623. Settings that apply only to shared libraries produced for the 'main' library component
- 624. The 'windows-resources' plugin

- 625. Configuring the location of Windows resource sources
- 626. Building a resource-only dll
- 627. Providing a library dependency to the source set
- 628. Providing a library dependency to the binary
- 629. Declaring project dependencies
- 630. Creating a precompiled header file
- 631. Including a precompiled header file in a source file
- 632. Configuring a precompiled header
- 633. Defining build types
- 634. Configuring debug binaries
- 635. Defining platforms
- 636. Defining flavors
- 637. Targeting a component at particular platforms
- 638. Building all possible variants
- 639. Defining tool chains
- 640. Reconfigure tool arguments
- 641. Defining target platforms
- 642. Registering CUnit tests
- 643. Configuring CUnit tests
- 644. Running CUnit tests
- 645. Registering GoogleTest tests
- 646. an example of using a custom software model
- 647. Declare a custom component
- 648. Register a custom component
- 649. Declare a custom binary
- 650. Register a custom binary
- 651. Declare a custom source set
- 652. Register a custom source set
- 653. Generates documentation binaries
- 654. Generates tasks for text source sets
- 655. Register a custom source set
- 656. an example of using a custom software model
- 657. components report
- 658. public type and internal view declaration
- 659. type registration
- 660. public and internal data mutation
- 661. example build script and model report output
- 662. Module dependencies
- 663. File dependencies
- 664. Generated file dependencies
- 665. Project dependencies
- 666. Gradle API dependencies
- 667. Gradle TestKit dependencies
- 668. Gradle's Groovy dependencies
- 669. Flat repository resolver

- 670. Adding central Maven repository
- 671. Adding Bintray's JCenter Maven repository
- 672. Adding Google Maven repository
- 673. Adding the local Maven cache as a repository
- 674. Adding custom Maven repository
- 675. Adding additional Maven repositories for JAR files
- 676. Accessing password-protected Maven repository
- 677. Ivy repository
- 678. Ivy repository with named layout
- 679. Ivy repository with pattern layout
- 680. Ivy repository with multiple custom patterns
- 681. Ivy repository with Maven compatible layout
- 682. Ivy repository with authentication
- 683. Maven repository that supports artifacts without metadata
- 684. Declaring a Maven and Ivy repository
- 685. Using the SFTP protocol for a repository
- 686. Declaring a S3 backed Maven and Ivy repository
- 687. Declaring a S3 backed Maven and Ivy repository using IAM
- 688. Declaring a Google Cloud Storage backed Maven and Ivy repository using default application credentials
- 689. Configure repository to use only digest authentication
- 690. Configure repository to use preemptive authentication
- B.1. Variables scope: local and script wide
- B.2. Distinct configuration and execution phase

# About Gradle

# Introduction

We would like to introduce Gradle to you, a build system that we think is a quantum leap for build technology in the Java (JVM) world. Gradle provides:

A very flexible general purpose build tool like Ant.

Switchable, build-by-convention frameworks a la Maven. But we never lock you in!

Very powerful support for multi-project builds.

Very powerful dependency management (based on Apache Ivy).

Full support for your existing Maven or Ivy repository infrastructure.

Support for transitive dependency management without the need for remote repositories or `pom.xml` and `ivy` files.

Ant tasks and builds as first class citizens.

Groovy build scripts.

A rich domain model for describing your build.

In *Overview* you will find a detailed overview of Gradle. Otherwise, the guides are waiting, have fun :)

§

## About this user guide

This user guide, like Gradle itself, is under very active development. Some parts of Gradle aren't documented as completely as they need to be. Some of the content presented won't be entirely clear or will assume that you know more about Gradle than you do. We need your help to improve this user guide. You can find out more about contributing to the documentation at the Gradle web site.

Throughout the user guide, you will find some diagrams that represent dependency relationships between Gradle tasks. These use something analogous to the UML dependency notation, which renders an arrow from one task to the task that the first task depends on.

# Overview

## §

## Features

Here is a list of some of Gradle's features.

### **Declarative builds and build-by-convention**

At the heart of Gradle lies a rich extensible Domain Specific Language (DSL) based on Groovy. Gradle pushes declarative builds to the next level by providing declarative language elements that you can assemble as you like. Those elements also provide build-by-convention support for Java, Groovy, OSGi, Web and Scala projects. Even more, this declarative language is extensible. Add your own new language elements or enhance the existing ones, thus providing concise, maintainable and comprehensible builds.

### **Language for dependency based programming**

The declarative language lies on top of a general purpose task graph, which you can fully leverage in your builds. It provides utmost flexibility to adapt Gradle to your unique needs.

### **Structure your build**

The suppleness and richness of Gradle finally allows you to apply common design principles to your build. For example, it is very easy to compose your build from reusable pieces of build logic. Inline stuff where unnecessary indirections would be inappropriate. Don't be forced to tear apart what belongs together (e.g. in your project hierarchy). Avoid smells like shotgun changes or divergent change that turn your build into a maintenance nightmare. At last you can create a well structured, easily maintained, comprehensible build.

### **Deep API**

From being a pleasure to be used embedded to its many hooks over the whole lifecycle of build execution, Gradle allows you to monitor and customize its configuration and execution behavior to its very core.

### **Gradle scales**

Gradle scales very well. It significantly increases your productivity, from simple single project builds up to huge enterprise multi-project builds. This is true for structuring the build. With the state-of-art incremental build function, this is also true for tackling the performance pain many large enterprise builds suffer from.

### **Multi-project builds**

Gradle's support for multi-project build is outstanding. Project dependencies are first class citizens. We allow you to model the project relationships in a multi-project build as they really are for your problem

domain. Gradle follows your layout not vice versa.

Gradle provides partial builds. If you build a single subproject Gradle takes care of building all the subprojects that subproject depends on. You can also choose to rebuild the subprojects that depend on a particular subproject. Together with incremental builds this is a big time saver for larger builds.

### **Many ways to manage your dependencies**

Different teams prefer different ways to manage their external dependencies. Gradle provides convenient support for any strategy. From transitive dependency management with remote Maven and Ivy repositories to jars or directories on the local file system.

### **Gradle is the first build integration tool**

Ant tasks are first class citizens. Even more interesting, Ant projects are first class citizens as well. Gradle provides a deep import for any Ant project, turning Ant targets into native Gradle tasks at runtime. You can depend on them from Gradle, you can enhance them from Gradle, you can even declare dependencies on Gradle tasks in your build.xml. The same integration is provided for properties, paths, etc ...

Gradle fully supports your existing Maven or Ivy repository infrastructure for publishing and retrieving dependencies. Gradle also provides a converter for turning a Maven `pom.xml` into a Gradle script. Runtime imports of Maven projects will come soon.

### **Ease of migration**

Gradle can adapt to any structure you have. Therefore you can always develop your Gradle build in the same branch where your production build lives and both can evolve in parallel. We usually recommend to write tests that make sure that the produced artifacts are similar. That way migration is as less disruptive and as reliable as possible. This is following the best-practices for refactoring by applying baby steps.

### **Groovy**

Gradle's build scripts are written in Groovy, not XML. But unlike other approaches this is not for simply exposing the raw scripting power of a dynamic language. That would just lead to a very difficult to maintain build. The whole design of Gradle is oriented towards being used as a language, not as a rigid framework. And Groovy is our glue that allows you to tell your individual story with the abstractions Gradle (or you) provide. Gradle provides some standard stories but they are not privileged in any form. This is for us a major distinguishing feature compared to other declarative build systems. Our Groovy support is not just sugar coating. The whole Gradle API is fully Groovy-ized. Adding Groovy results in an enjoyable and productive experience.

### **The Gradle wrapper**

The Gradle Wrapper allows you to execute Gradle builds on machines where Gradle is not installed. This is useful for example for some continuous integration servers. It is also useful for an open source project to keep the barrier low for building it. The wrapper is also very interesting for the enterprise. It is a zero administration approach for the client machines. It also enforces the usage of a particular Gradle version thus minimizing support issues.

### **Free and open source**

Gradle is an open source project, and is licensed under the ASL.

## §

### Why Groovy?

We think the advantages of an internal DSL (based on a dynamic language) over XML are tremendous when used in *build scripts*. There are a couple of dynamic languages out there. Why Groovy? The answer lies in the context Gradle is operating in. Although Gradle is a general purpose build tool at its core, its main focus are Java projects. In such projects the team members will be very familiar with Java. We think a build should be as transparent as possible to *all* team members.

In that case, you might argue why we don't just use Java as the language for build scripts. We think this is a valid question. It would have the highest transparency for your team and the lowest learning curve, but because of the limitations of Java, such a build language would not be as nice, expressive and powerful as it could be.<sup>[1]</sup> Languages like Python, Groovy or Ruby do a much better job here. We have chosen Groovy as it offers by far the greatest transparency for Java people. Its base syntax is the same as Java's as well as its type system, its package structure and other things. Groovy provides much more on top of that, but with the common foundation of Java.

For Java developers with Python or Ruby knowledge or the desire to learn them, the above arguments don't apply. The Gradle design is well-suited for creating another build script engine in JRuby or Jython. It just doesn't have the highest priority for us at the moment. We happily support any community effort to create additional build script engines.

---

[1] At <http://www.defmacro.org/ramblings/lisp.html> you find an interesting article comparing Ant, XML, Java and Lisp. It's funny that the 'if Java had that syntax' syntax in this article is actually the Groovy syntax.



# Working with existing builds

# Installing Gradle

You can install the Gradle build tool on Linux, macOS, or Windows. This document covers installing using a package manager like SDKMAN!, Homebrew, or Scoop, as well as manual installation.

Use of the Gradle Wrapper is the recommended way to upgrade Gradle.

You can find all releases and their checksums on the [releases page](#).

## §

### Prerequisites

Gradle runs on all major operating systems and requires only a Java JDK version 7 or higher to run. To check, run `java -version`. You should see something like this:

```
java -version
java version "1.8.0_151"
Java(TM) SE Runtime Environment (build 1.8.0_151-b12)
Java HotSpot(TM) 64-Bit Server VM (build 25.151-b12, mixed mode)
```

Gradle ships with its own Groovy library, therefore Groovy does not need to be installed. Any existing Groovy installation is ignored by Gradle.

Gradle uses whatever JDK it finds in your path. Alternatively, you can set the `JAVA_HOME` environment variable to point to the installation directory of the desired JDK.

## §

### Installing with a package manager

SDKMAN! is a tool for managing parallel versions of multiple Software Development Kits on most Unix-based systems.

```
sdk install gradle
```

Homebrew is "the missing package manager for macOS".

```
brew install gradle
```

Scoop is a command-line installer for Windows inspired by Homebrew.

```
scoop install gradle
```

Chocolatey is "the package manager for Windows".

```
choco install gradle
```

MacPorts is a system for managing tools on macOS:

```
sudo port install gradle
```

Proceed to next steps

§

## Installing manually

§

### Step 1. Download the latest Gradle distribution

The distribution ZIP file comes in two flavors:

Binary-only (bin)

Complete (all) with docs and sources

Need to work with an older version? See the releases page.

§

### Step 2. Unpack the distribution

§

Linux & MacOS users

Unzip the distribution zip file in the directory of your choosing, e.g.:

```
mkdir /opt/gradle
unzip -d /opt/gradle gradle-4.9-bin.zip
ls /opt/gradle/gradle-4.9
LICENSE NOTICE bin getting-started.html init.d lib media
```

§

Microsoft Windows users

Create a new directory `C:\Gradle` with **File Explorer**.

Open a second **File Explorer** window and go to the directory where the Gradle distribution was downloaded. Double-click the ZIP archive to expose the content. Drag the content folder `gradle-4.9` to your newly created `C:\Gradle` folder.

Alternatively you can unpack the Gradle distribution ZIP into `C:\Gradle` using an archiver tool of your choice.

§

### Step 3. Configure your system environment

For running Gradle, firstly add the environment variable `GRADLE_HOME`. This should point to the unpacked files from the Gradle website. Next add `GRADLE_HOME/bin` to your `PATH` environment variable. Usually, this is sufficient to run Gradle.

§

Linux & MacOS users

Configure your `PATH` environment variable to include the `bin` directory of the unzipped distribution, e.g.:

```
export PATH=$PATH:/opt/gradle/gradle-4.9/bin
```

§

Microsoft Windows users

In **File Explorer** right-click on the `This PC` (or `Computer`) icon, then click `Properties` `Advanced System Settings` `Environmental Variables`.

Under `System Variables` select `Path`, then click `Edit`. Add an entry for `C:\Gradle\gradle-4.9\bin`. Click `OK` to save.

Proceed to next steps

§

## Verifying installation

Open a console (or a Windows command prompt) and run `gradle -v` to run gradle and display the version, e.g.:

```
gradle -v

-----
Gradle 4.9
-----

Build time:   2018-02-21 15:28:42 UTC
Revision:     819e0059da49f469d3e9b2896dc4e72537c4847d

Groovy:       2.4.12
Ant:          Apache Ant(TM) version 1.9.9 compiled on February 2 2017
JVM:          1.8.0_151 (Oracle Corporation 25.151-b12)
OS:           Mac OS X 10.13.3 x86_64
```

If you run into any trouble, see the section on troubleshooting installation.

You can verify the integrity of the Gradle distribution by downloading the SHA-256 file (available from the

releases page) and following these verification instructions.

§

## Next steps

Now that you have Gradle installed, use these resources for getting started:

Create your first Gradle project by following the [Creating New Gradle Builds](#) tutorial.

Sign up for a live introductory Gradle training with a core engineer.

Learn how to achieve common tasks through the command-line interface.

Configure Gradle execution, such as use of an HTTP proxy for downloading dependencies.

Subscribe to the Gradle Newsletter for monthly release and community updates.

# Command-Line Interface

The command-line interface is one of the primary methods of interacting with Gradle. The following serves as a reference of executing and customizing Gradle use of a command-line or when writing scripts or configuring continuous integration.

Use of the Gradle Wrapper is highly encouraged. You should substitute `./gradlew` or `gradlew.bat` for `gr` in all following examples when using the Wrapper.

Executing Gradle on the command-line conforms to the following structure. Options are allowed before and after task names.

```
gradle [taskName...] [--option-name...]
```

If multiple tasks are specified, they should be separated with a space.

Options that accept values can be specified with or without `=` between the option and argument; however, use of `=` is recommended.

```
--console=plain
```

Options that enable behavior have long-form options with inverses specified with `--no-`. The following are opposites.

```
--build-cache  
--no-build-cache
```

Many long-form options, have short option equivalents. The following are equivalent:

```
--help  
-h
```

**Note:** Many command-line flags can be specified in `gradle.properties` to avoid needing to be typed. See the configuring build environment guide for details.

The following sections describe use of the Gradle command-line interface, grouped roughly by user goal. Some plugins also add their own command line options, for example `--tests` for Java test filtering. For more information on exposing command line options for your own tasks, see the section called “Declaring and Using Command Line Options”.

§

## Executing tasks

You can run a task and all of its dependencies.

```
gradle myTask
```

You can learn about what projects and tasks are available in the project reporting section.

§

## Executing tasks in multi-project builds

In a multi-project build, subproject tasks can be executed with ":" separating subproject name and task name. The following are equivalent *when run from the root project*.

```
gradle :mySubproject:taskName  
gradle mySubproject:taskName
```

You can also run a task for all subprojects using the task name only. For example, this will run the "test" task for all subprojects when invoked from the root project directory.

```
gradle test
```

When invoking Gradle from within a subproject, the project name should be omitted:

```
cd mySubproject  
gradle taskName
```

**Note:** When executing the Gradle Wrapper from subprojects, one must reference `gradlew` relatively. For example: `../gradlew taskName`. The community gdub project aims to make this more convenient.

§

## Executing multiple tasks

You can also specify multiple tasks. For example, the following will execute the `test` and `deploy` tasks in the order that they are listed on the command-line and will also execute the dependencies for each task.


```
gradle test deploy
```

§

## Excluding tasks from execution

You can exclude a task from being executed using the `-x` or `--exclude-task` command-line option and providing the name of the task to exclude.

Figure 1. Example Task Graph



### Example 1. Excluding tasks

Output of `gradle dist --exclude-task test`

```
> gradle dist --exclude-task test

> Task :compile
compiling source

> Task :dist
building the distribution

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

You can see that the `test` task is not executed, even though it is a dependency of the `dist` task. The `test` task's dependencies such as `compileTest` are not executed either. Those dependencies of `test` that are required by another task, such as `compile`, are still executed.

§

### Forcing tasks to execute

You can force Gradle to execute all tasks ignoring up-to-date checks using the `--rerun-tasks` option:

```
gradle test --rerun-tasks
```

This will force `test` and *all* task dependencies of `test` to execute. It's a little like running `gradle clean t`, but without the build's generated output being deleted.

§

### Continuing the build when a failure occurs

By default, Gradle will abort execution and fail the build as soon as any task fails. This allows the build to complete sooner, but hides other failures that would have occurred. In order to discover as many failures as possible in a single build execution, you can use the `--continue` option.

```
gradle test --continue
```

When executed with `--continue`, Gradle will execute *every* task to be executed where all of the dependencies for that task completed without failure, instead of stopping as soon as the first failure is encountered. Each of the encountered failures will be reported at the end of the build.



If a task fails, any subsequent tasks that were depending on it will not be executed. For example, tests will not run if there is a compilation failure in the code under test; because the test task will depend on the compilation task (either directly or indirectly).

§

## Task name abbreviation

When you specify tasks on the command-line, you don't have to provide the full name of the task. You only need to provide enough of the task name to uniquely identify the task. For example, it's likely `gradle che` is enough for Gradle to identify the `check` task.

You can also abbreviate each word in a camel case task name. For example, you can execute task `compile` by running `gradle compTest` or even `gradle cT`.

### Example 2. Abbreviated camel case task name

Output of `gradle cT`

```
> gradle cT

> Task :compile
compiling source

> Task :compileTest
compiling unit tests

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

You can also use these abbreviations with the `-x` command-line option.

§

## Common tasks

The following are task conventions applied by built-in and most major Gradle plugins.

§

### Computing all outputs

It is common in Gradle builds for the `build` task to designate assembling all outputs and running all checks.

```
gradle build
```

§

### Running applications

It is common for applications to be run with the `run` task, which assembles the application and executes some script or binary.

```
gradle run
```

§

## Running all checks

It is common for *all* verification tasks, including tests and linting, to be executed using the `check` task.

```
gradle check
```

§

## Cleaning outputs

You can delete the contents of the build directory using the `clean` task, though doing so will cause pre-computed outputs to be lost, causing significant additional build time for the subsequent task execution.

```
gradle clean
```

§

## Project reporting

Gradle provides several built-in tasks which show particular details of your build. This can be useful for understanding the structure and dependencies of your build, and for debugging problems.

You can get basic help about available reporting options using `gradle help`.

§

## Listing projects

Running `gradle projects` gives you a list of the sub-projects of the selected project, displayed in a hierarchy.

```
gradle projects
```

You also get a project report within build scans. Learn more about creating build scans.

§

## Listing tasks

Running `gradle tasks` gives you a list of the main tasks of the selected project. This report shows the default tasks for the project, if any, and a description for each task.

```
gradle tasks
```

By default, this report shows only those tasks which have been assigned to a task group. You can obtain more information in the task listing using the `--all` option.

```
gradle tasks --all
```

§

## Show task usage details

Running `gradle help --task someTask` gives you detailed information about a specific task.

### Example 3. Obtaining detailed help for tasks

Output of `gradle -q help --task libs`

```
> gradle -q help --task libs
Detailed task information for libs
```

#### Paths

```
:api:libs
:webapp:libs
```

#### Type

```
Task (org.gradle.api.Task)
```

#### Description

```
Builds the JAR
```

#### Group

```
build
```

This information includes the full task path, the task type, possible command line options and the description of the given task.

§

## Reporting dependencies

Build scans give a full, visual report of what dependencies exist on which configurations, transitive dependencies, and dependency version selection.

```
gradle myTask --scan
```

This will give you a link to a web-based report, where you can find dependency information like this.



Learn more in *Inspecting Dependencies*.

§

## Listing project dependencies

Running `gradle dependencies` gives you a list of the dependencies of the selected project, broken down by configuration. For each configuration, the direct and transitive dependencies of that configuration are shown in a tree. Below is an example of this report:

```
gradle dependencies
```

Concrete examples of build scripts and output available in the *Inspecting Dependencies*.

Running `gradle buildEnvironment` visualises the buildscript dependencies of the selected project, similarly to how `gradle dependencies` visualizes the dependencies of the software being built.

```
gradle buildEnvironment
```

Running `gradle dependencyInsight` gives you an insight into a particular dependency (or dependencies) that match specified input.

```
gradle dependencyInsight
```

Since a dependency report can get large, it can be useful to restrict the report to a particular configuration.

This is achieved with the optional `--configuration` parameter:

§

## Listing project properties

Running `gradle properties` gives you a list of the properties of the selected project.

### Example 4. Information about properties

Output of `gradle -q api:properties`

```
> gradle -q api:properties

-----
Project :api - The shared API for the application
-----

allprojects: [project ':api']
ant: org.gradle.api.internal.project.DefaultAntBuilder@12345
antBuilderFactory: org.gradle.api.internal.project.DefaultAntBuilderFactory@12345
artifacts: org.gradle.api.internal.artifacts.dsl.DefaultArtifactHandler_Decorated
asDynamicObject: DynamicObject for project ':api'
baseClassLoaderScope: org.gradle.api.internal.initialization.DefaultClassLoaderScope
buildDir: /home/user/gradle/samples/userguide/tutorial/projectReports/api/build
buildFile: /home/user/gradle/samples/userguide/tutorial/projectReports/api/build.gradle
```

§

## Software Model reports

You can get a hierarchical view of elements for software model projects using the `model` task:

```
gradle model
```


Learn more about the model report in the software model documentation.

§

## Command-line completion

Gradle provides bash and zsh tab completion support for tasks, options, and Gradle properties through `gradle-completion`, installed separately.

Figure 2. Gradle Completion

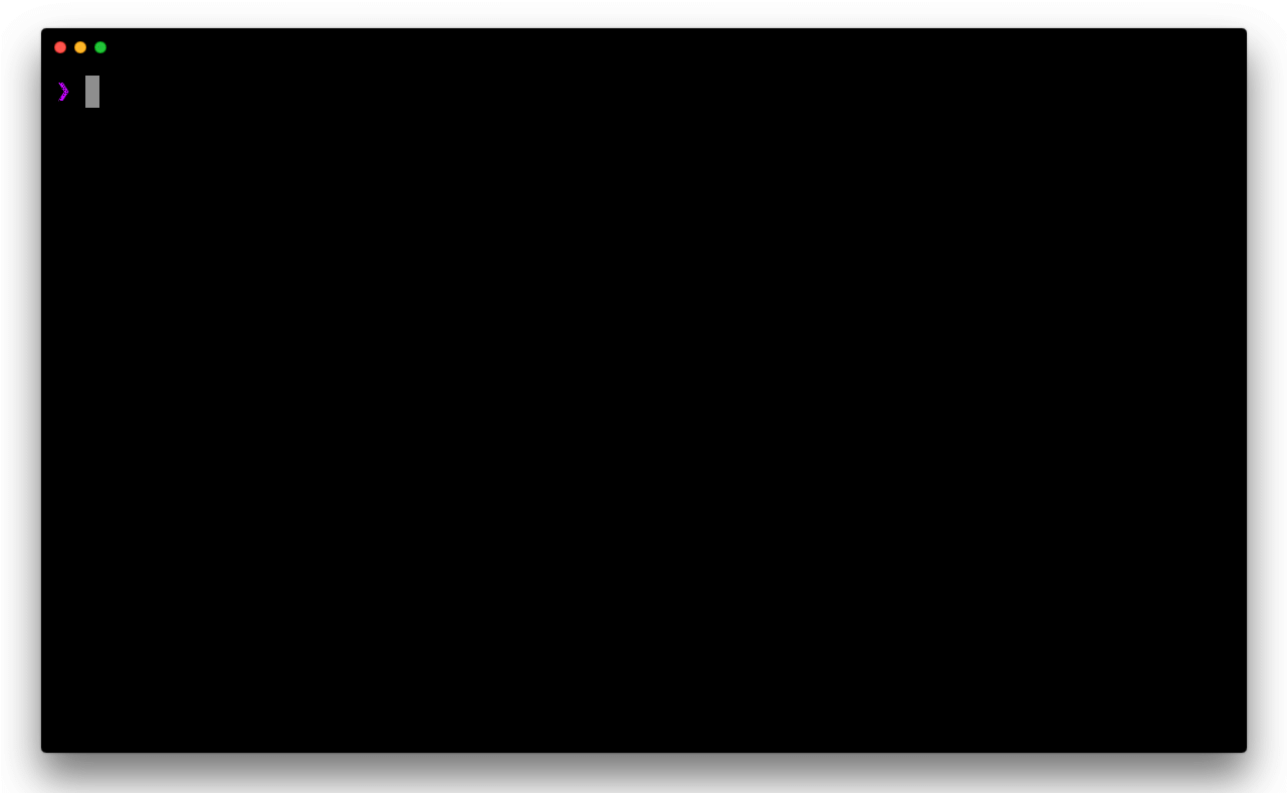

§

## Debugging options

**-?, -h, --help**

Shows a help message with all available CLI options.

**-v, --version**

Prints Gradle, Groovy, Ant, JVM, and operating system version information.

**-S, --full-stacktrace**

Print out the full (very verbose) stacktrace for any exceptions. See also logging options.

**-s, --stacktrace**

Print out the stacktrace also for user exceptions (e.g. compile error). See also logging options.

**--scan**

Create a build scan with fine-grained information about all aspects of your Gradle build.

**-Dorg.gradle.debug=true**

Debug Gradle client (non-Daemon) process. Gradle will wait for you to attach a debugger at `localhost:5005` by default.

**-Dorg.gradle.daemon.debug=true**

Debug Gradle Daemon process.

§

## Performance options

Try these options when optimizing build performance. Learn more about improving performance of Gradle builds [here](#).

Many of these options can be specified in `gradle.properties` so command-line flags are not necessary. See the [configuring build environment guide](#).

**--build-cache, --no-build-cache**

Toggles the Gradle build cache. Gradle will try to reuse outputs from previous builds. *Default is off.*

**--configure-on-demand, --no-configure-on-demand**

Toggles Configure-on-demand. Only relevant projects are configured in this build run. *Default is off.*

**--max-workers**

Sets maximum number of workers that Gradle may use. *Default is number of processors.*

**--parallel, --no-parallel**


Build projects in parallel. For limitations of this option please see the section called “Parallel project execution”. *Default is off.*

### **--profile**

Generates a high-level performance report in the `$buildDir/reports/profile` directory. `--scan` is preferred.

### **--scan**

Generate a build scan with detailed performance diagnostics.

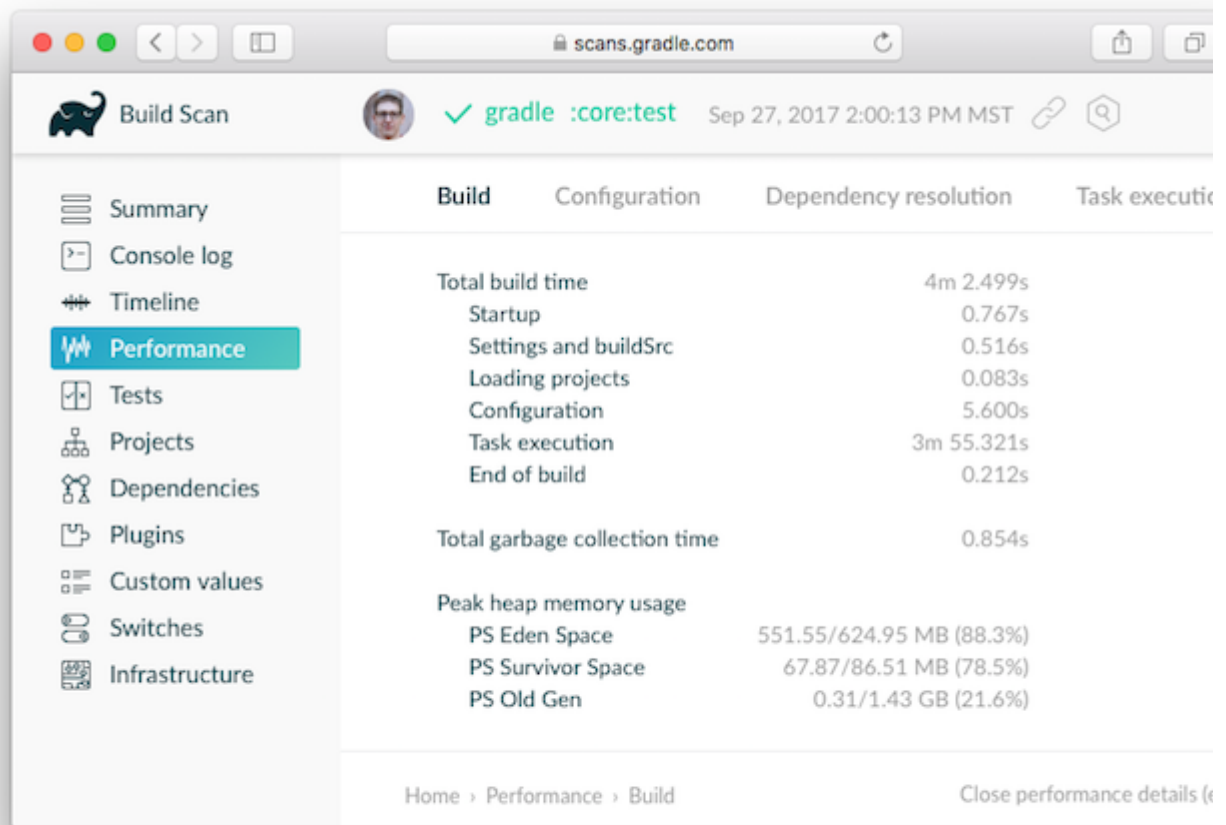

§

## Gradle daemon options

You can manage the Gradle Daemon through the following command line options.

### **--daemon, --no-daemon**

Use the Gradle Daemon to run the build. Starts the daemon if not running or existing daemon busy. *Default is on.*

### **--foreground**

Starts the Gradle Daemon in a foreground process.

### **--status (Standalone command)**

Run `gradle --status` to list running and recently stopped Gradle daemons. Only displays daemons of



the same Gradle version.

### **--stop (Standalone command)**

Run `gradle --stop` to stop all Gradle Daemons of the same version.

### **-Dorg.gradle.daemon.idletimeout=(number of milliseconds)**

Gradle Daemon will stop itself after this number of milliseconds of idle time. *Default is 10800000 (3 hours).*

§

## Logging options

§

### Setting log level

You can customize the verbosity of Gradle logging with the following options, ordered from least verbose to most verbose. Learn more in the logging documentation.

### **-Dorg.gradle.logging.level=(quiet,warn,lifecycle,info,debug)**

Set logging level via Gradle properties.

### **-q, --quiet**

Log errors only.

### **-w, --warn**

Set log level to warn.

### **-i, --info**

Set log level to info.

### **-d, --debug**

Log in debug mode (includes normal stacktrace).

Lifecycle is the default log level.

§

### Customizing log format

You can control the use of rich output (colors and font variants) by specifying the "console" mode in the following ways:

### **-Dorg.gradle.console=(auto,plain,rich,verbose)**

Specify console mode via Gradle properties. Different modes described immediately below.

### **--console=(auto,plain,rich,verbose)**

Specifies which type of console output to generate.

Set to `plain` to generate plain text only. This option disables all color and other rich output in the

console output. This is the default when Gradle is *not* attached to a terminal.

Set to `auto` (the default) to enable color and other rich output in the console output when the build process is attached to a console, or to generate plain text only when not attached to a console. *This is the default when Gradle is attached to a terminal.*

Set to `rich` to enable color and other rich output in the console output, regardless of whether the build process is not attached to a console. When not attached to a console, the build output will use ANSI control characters to generate the rich output.

Set to `verbose` to enable color and other rich output like the `rich`, but output task names and outcomes at the lifecycle log level, as is done by default in Gradle 3.5 and earlier.

§

## Showing or hiding warnings

By default, Gradle won't display all warnings (e.g. deprecation warnings). Instead, Gradle will collect them and render a summary at the end of the build like:

```
Deprecated Gradle features were used in this build, making it incompatible with Gradle 4.0
```

You can control the verbosity of warnings on the console with the following options:

```
-Dorg.gradle.warning.mode=(all,none,summary)
```

Specify warning mode via Gradle properties. Different modes described immediately below.

```
--warning-mode=(all,none,summary)
```

Specifies how to log warnings. Default is `summary`.

Set to `all` to log all warnings.


Set to `summary` to suppress all warnings and log a summary at the end of the build.

Set to `none` to suppress all warnings, including the summary at the end of the build.

§

## Rich Console

Gradle's rich console displays extra information while builds are running.

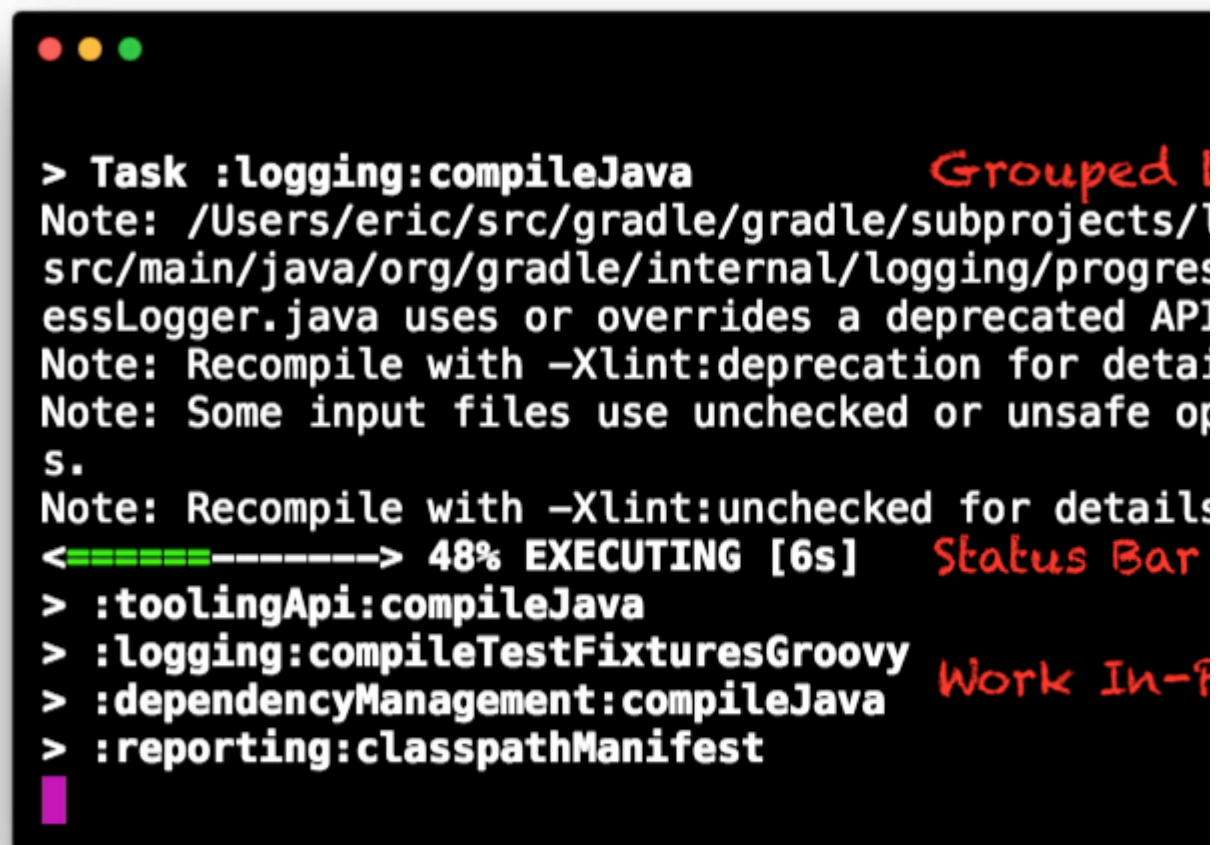A screenshot of a terminal window with a black background and white text. At the top left, there are three colored window control buttons (red, yellow, green). The terminal shows the execution of a Gradle build. The first task is `> Task :logging:compileJava`. Below it, there are several notes: `Note: /Users/eric/src/gradle/gradle/subprojects/...`, `Note: src/main/java/org/gradle/internal/logging/progressLogger.java uses or overrides a deprecated API`, `Note: Recompile with -Xlint:deprecation for details`, and `Note: Some input files use unchecked or unsafe operations.` Then, a progress bar is shown: `<====-> 48% EXECUTING [6s]`. Below the progress bar, there are four more tasks listed: `> :toolingApi:compileJava`, `> :logging:compileTestFixturesGroovy`, `> :dependencyManagement:compileJava`, and `> :reporting:classpathManifest`. The terminal ends with a pink cursor line. Handwritten red text annotations are present: "Grouped" next to the first task, "Status Bar" next to the progress bar, and "Work In-Progress" next to the task list.

Features:

Progress bar and timer visually describe overall status

Parallel work-in-progress lines below describe what is happening now

Colors and fonts are used to highlight important output and errors

§

## Execution options

The following options affect how builds are executed, by changing what is built or how dependencies are resolved.

### `--include-build`

Run the build as a composite, including the specified build. See Composite Builds.

### `--offline`

Specifies that the build should operate without accessing network resources. Learn more about options to override dependency caching.

### **--refresh-dependencies**

Refresh the state of dependencies. Learn more about how to use this in the dependency management docs.

### **--dry-run**

Run Gradle with all task actions disabled. Use this to show which task would have executed.

### **--write-locks**

Indicates that all resolved configurations that are *lockable* should have their lock state persisted. Learn more about this in dependency locking.

### **--update-locks <group:name>[,<group:name>]\***

Indicates that versions for the specified modules have to be updated in the lock file. This flag also implies `--write-locks`. Learn more about this in dependency locking.

## §

## Environment options

You can customize many aspects about where build scripts, settings, caches, and so on through the options below. Learn more about customizing your build environment.

### **-b, --build-file**

Specifies the build file. For example: `gradle --build-file=foo.gradle`. The default is `build.gradle`, then `build.gradle.kts`, then `myProjectName.gradle`.

### **-c, --settings-file**

Specifies the settings file. For example: `gradle --settings-file=somewhere/else/settings.g`

### **-g, --gradle-user-home**

Specifies the Gradle user home directory. The default is the `.gradle` directory in the user's home directory.

### **-p, --project-dir**

Specifies the start directory for Gradle. Defaults to current directory.

### **--project-cache-dir**

Specifies the project-specific cache directory. Default value is `.gradle` in the root project directory.

### **-u, --no-search-upward (deprecated)**

Don't search in parent directories for a `settings.gradle` file.

### **-D, --system-prop**

Sets a system property of the JVM, for example `-Dmyprop=myvalue`. See the section called “System properties”.

### **-I, --init-script**

Specifies an initialization script. See *Initialization Scripts*.

**-P, --project-prop**

Sets a project property of the root project, for example `-Pmyprop=myvalue`. See the section called “Project properties”.

**-Dorg.gradle.jvmargs**

Set JVM arguments.

**-Dorg.gradle.java.home**

Set JDK home dir.

§

## Bootstrapping new projects

§

### Creating new Gradle builds

Use the built-in `gradle init` task to create a new Gradle builds, with new or existing projects.

```
gradle init
```

Most of the time you'll want to specify a project type. Available types include `basic` (default), `java-library`, `java-application`, and more. See [init plugin documentation](#) for details.

```
gradle init --type java-library
```

§

### Standardize and provision Gradle

The built-in `gradle wrapper` task generates a script, `gradlew`, that invokes a declared version of Gradle, downloading it beforehand if necessary.

```
gradle wrapper --gradle-version=4.4
```

You can also specify `--distribution-type=(bin|all)`, `--gradle-distribution-url`, `--gradle-in` in addition to `--gradle-version`. Full details on how to use these options are documented in the [Gradle wrapper](#) section.

§

## Continuous Build

Continuous Build allows you to automatically re-execute the requested tasks when task inputs change.

For example, you can continuously run the `test` task and all dependent tasks by running:

```
gradle test --continuous
```

Gradle will behave as if you ran `gradle test` after a change to sources or tests that contribute to the

requested tasks. This means that unrelated changes (such as changes to build scripts) will not trigger a rebuild. In order to incorporate build logic changes, the continuous build must be restarted manually.

§

## Terminating Continuous Build

If Gradle is attached to an interactive input source, such as a terminal, the continuous build can be exited by pressing `CTRL-D` (On Microsoft Windows, it is required to also press `ENTER` or `RETURN` after `CTRL-D`). If Gradle is not attached to an interactive input source (e.g. is running as part of a script), the build process must be terminated (e.g. using the `kill` command or similar). If the build is being executed via the Tooling API, the build can be cancelled using the Tooling API's cancellation mechanism.

§

## Limitations and quirks

**Note:** Continuous build is an incubating feature.

There are several issues to be aware with the current implementation of continuous build. These are likely to be addressed in future Gradle releases.

§

### Build cycles

Gradle starts watching for changes just before a task executes. If a task modifies its own inputs while executing, Gradle will detect the change and trigger a new build. If every time the task executes, the inputs are modified again, the build will be triggered again. This isn't unique to continuous build. A task that modifies its own inputs will never be considered up-to-date when run "normally" without continuous build.

If your build enters a build cycle like this, you can track down the task by looking at the list of files reported changed by Gradle. After identifying the file(s) that are changed during each build, you should look for a task that has that file as an input. In some cases, it may be obvious (e.g., a Java file is compiled with `compileJava`). In other cases, you can use `--info` logging to find the task that is out-of-date due to the identified files.

§

### Restrictions with Java 9

Due to class access restrictions related to Java 9, Gradle cannot set some operating system specific options, which means that:

On macOS, Gradle will poll for file changes every 10 seconds instead of every 2 seconds.

On Windows, Gradle must use individual file watches (like on Linux/Mac OS), which may cause continuous build to no longer work on very large projects.

§

#### Performance and stability

The JDK file watching facility relies on inefficient file system polling on macOS (see: [JDK-7133447](#)). This can significantly delay notification of changes on large projects with many source files.

Additionally, the watching mechanism may deadlock under *heavy* load on macOS (see: [JDK-8079620](#)). This will manifest as Gradle appearing not to notice file changes. If you suspect this is occurring, exit continuous build and start again.

On Linux, OpenJDK's implementation of the file watch service can sometimes miss file system events (see: [JDK-8145981](#)).

§

#### Changes to symbolic links

Creating or removing symbolic link to files will initiate a build.

Modifying the target of a symbolic link will not cause a rebuild.

Creating or removing symbolic links to directories will not cause rebuilds.

Creating new files in the target directory of a symbolic link will not cause a rebuild.

Deleting the target directory will not cause a rebuild.

§


#### Changes to build logic are not considered

The current implementation does not recalculate the build model on subsequent builds. This means that changes to task configuration, or any other change to the build model, are effectively ignored.

# The Gradle Wrapper

The recommended way to execute any Gradle build is with the help of the Gradle Wrapper (in short just “Wrapper”). The Wrapper is a script that invokes a declared version of Gradle, downloading it beforehand if necessary. As a result, developers can get up and running with a Gradle project quickly without having to follow manual installation processes saving your company time and money.

**Figure 3. The Wrapper workflow**

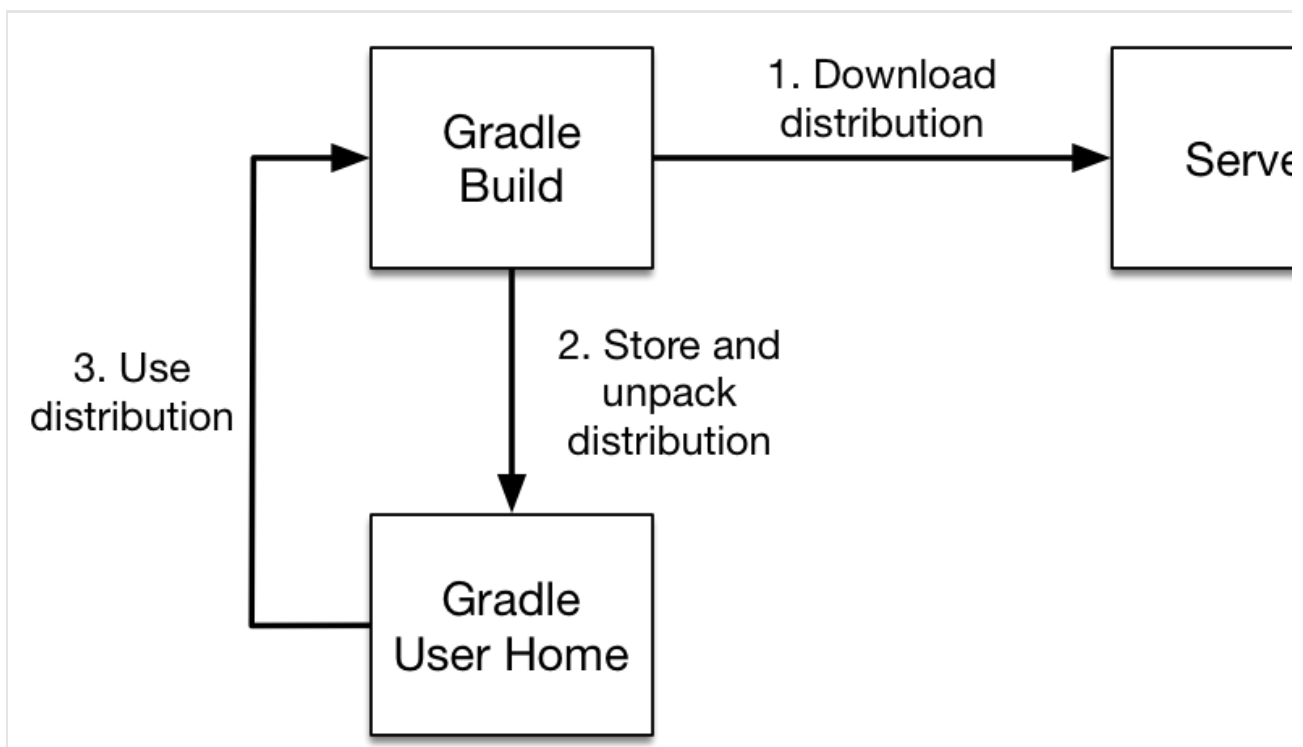

**In a nutshell you gain the following benefits:**

Standardizes a project on a given Gradle version, leading to more reliable and robust builds.

Provisioning a new Gradle version to different users and execution environment (e.g. IDEs or Continuous Integration servers) is as simple as changing the Wrapper definition.

**So how does it work? For a user there are typically three different workflows:**

You set up a new Gradle project and want to add the Wrapper to it.

You want to run a project with the Wrapper that already provides it.



You want to upgrade the Wrapper to a new version of Gradle.

The following sections explain each of these use cases in more detail.

§

## Adding the Gradle Wrapper

Generating the Wrapper files requires an installed version of the Gradle runtime on your machine as described in *Installing Gradle*. Thankfully, generating the initial Wrapper files is a one-time process.

Every vanilla Gradle build comes with a built-in task called `wrapper`. You'll be able to find the task listed under the group "Build Setup tasks" when listing the tasks. Executing the `wrapper` task generates the necessary Wrapper files in the project directory.

### Example 5. Running the Wrapper task

#### Output of `gradle wrapper`

```
> gradle wrapper
> Task :wrapper

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

**Note:** To make the Wrapper files available to other developers and execution environments you'll need to check them into version control. All Wrapper files including the JAR file are very small in size. Adding the JAR file to version control is expected. Some organizations do not allow projects to submit binary files to version control. At the moment there are no alternative options to the approach.

The generated Wrapper properties file, `gradle/wrapper/gradle-wrapper.properties`, stores the information about the Gradle distribution.

The server hosting the Gradle distribution.

The type of Gradle distribution. By default that's the `-bin` distribution containing only the runtime but no sample code and documentation.

The Gradle version used for executing the build. By default the `wrapper` task picks the exact same Gradle version that was used to generate the Wrapper files.

### Example 6. The generated distribution URL

`gradle/wrapper/gradle-wrapper.properties`.

```
distributionUrl=https\://services.gradle.org/distributions/gradle-4.3.1-bin.zip
```

All of those aspects are configurable at the time of generating the Wrapper files with the help of the following

command line options.

#### **--gradle-version**

The Gradle version used for downloading and executing the Wrapper.

#### **--distribution-type**

The Gradle distribution type used for the Wrapper. Available options are `bin` and `all`. The default value is `bin`.

#### **--gradle-distribution-url**

The full URL pointing to Gradle distribution ZIP file. Using this option makes `--gradle-version` and `--distribution-type` obsolete as the URL already contains this information. This option is extremely valuable if you want to host the Gradle distribution inside your company's network.

#### **--gradle-distribution-sha256-sum**

The SHA256 hash sum used for verifying the downloaded Gradle distribution.

Let's assume the following use case to illustrate the use of the command line options. You would like to generate the Wrapper with version 4.0 and use the `-all` distribution to enable your IDE to enable code-completion and being able to navigate to the Gradle source code. Those requirements are captured by the following command line execution:

#### **Example 7. Providing options to Wrapper task**

Output of `gradle wrapper --gradle-version 4.0 --distribution-type all`

```
> gradle wrapper --gradle-version 4.0 --distribution-type all
> Task :wrapper
```

```
BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

As a result you can find the desired information in the Wrapper properties file.

#### **Example 8. The generated distribution URL**

`gradle/wrapper/gradle-wrapper.properties`.

```
distributionUrl=https\://services.gradle.org/distributions/gradle-4.0-all.zip
```

Let's have a look at the following project layout to illustrate the expected Wrapper files:

```

.
build.gradle
settings.gradle
gradle
  wrapper
    gradle-wrapper.jar
    gradle-wrapper.properties
gradlew
gradlew.bat

```

A Gradle project typically provides a `build.gradle` and a `settings.gradle` file. The Wrapper files live alongside in the `gradle` directory and the root directory of the project. The following list explains their purpose.

#### **gradle-wrapper.jar**

The Wrapper JAR file containing code for downloading the Gradle distribution.

#### **gradle-wrapper.properties**

A properties file responsible for configuring the Wrapper runtime behavior e.g. the Gradle version compatible with this version.

#### **gradlew, gradlew.bat**

A shell script and a Windows batch script for executing the build with the Wrapper.

You can go ahead and execute the build with the Wrapper without having to install the Gradle runtime. If the project you are working on does not contain those Wrapper files then you'll need to generate them.

## §

### Using the Gradle Wrapper

It is recommended to always execute a build with the Wrapper to ensure a reliable, controlled and standardized execution of the build. Using the Wrapper looks almost exactly like running the build with a Gradle installation. Depending on the operating system you either run `gradlew` or `gradlew.bat` instead of the `gradle` command. The following console output demonstrate the use of the Wrapper on a Windows machine for a Java-based project.

#### **Example 9. Executing the build with the Wrapper batch file**

##### **Output of `gradlew.bat build`**

```

> gradlew.bat build
Downloading https://services.gradle.org/distributions/gradle-4.0-all.zip
.....
Unzipping C:\Documents and Settings\Claudia\.gradle\wrapper\dists\gradle-4.0-all
Set executable permissions for: C:\Documents and Settings\Claudia\.gradle\wrappe

BUILD SUCCESSFUL in 12s
1 actionable task: 1 executed

```

In case the Gradle distribution is not available on the machine, the Wrapper will download it and store in the local file system. Any subsequent build invocation is going to reuse the existing local distribution as long as the distribution URL in the Gradle properties doesn't change.

**Note:** The Wrapper shell script and batch file reside in the root directory of a single or multi-project Gradle build. You will need to reference the correct path to those files in case you want to execute the build from a subproject directory e.g. `../../gradlew tasks`.

§

## Upgrading the Gradle Wrapper

Projects will typically want to keep up with the times and upgrade their Gradle version to benefit from new features and improvements. One way to upgrade the Gradle version is manually change the `distribution` property in the Wrapper property file. The better and recommended option is to run the `wrapper` task and provide the target Gradle version as described in the section called “Adding the Gradle Wrapper”. Using the `wrapper` task ensures that any optimizations made to the Wrapper shell script or batch file with that specific Gradle version are applied to the project. As usual you'd commit the changes to the Wrapper files to version control.

Use the Gradle `wrapper` task to generate the wrapper, specifying a version. The default is the current version, which you can check by executing `./gradlew --version`.

### Example 10. Upgrading the Wrapper version

Output of `./gradlew wrapper --gradle-version 4.2.1`

```
> ./gradlew wrapper --gradle-version 4.2.1
```

```
BUILD SUCCESSFUL in 4s
```

```
1 actionable task: 1 executed
```

### Example 11. Checking the Wrapper version after upgrading

Output of `./gradlew -v`

```
> ./gradlew -v
Downloading https://services.gradle.org/distributions/gradle-4.2.1-bin.zip
.....
Unzipping /Users/claudia/.gradle/wrapper/dists/gradle-4.2.1-bin/dajvke9o8kmaxbu0l
Set executable permissions for: /Users/claudia/.gradle/wrapper/dists/gradle-4.2.1-
-----
Gradle 4.2.1
-----

Build time:      2017-10-02 15:36:21 UTC
Revision:       a88ebd6be7840c2e59ae4782eb0f27fbe3405ddf

Groovy:         2.4.12
Ant:            Apache Ant(TM) version 1.9.6 compiled on June 29 2015
JVM:            1.8.0_60 (Oracle Corporation 25.60-b23)
OS:             Mac OS X 10.13.1 x86_64
```

§

## Customizing the Gradle Wrapper

Most users of Gradle are happy with the default runtime behavior of the Wrapper. However, organizational policies, security constraints or personal preferences might require you to dive deeper into customizing the Wrapper. Thankfully, the built-in `wrapper` task exposes numerous options to bend the runtime behavior to your needs. Most configuration options are exposed by the underlying task type `Wrapper`.

Let's assume you grew tired of defining the `-all` distribution type on the command line every time you upgrade the Wrapper. You can save yourself some keyboard strokes by re-configuring the `wrapper` task.

### Example 12. Customizing the Wrapper task

**build.gradle**

```
wrapper {
    distributionType = Wrapper.DistributionType.ALL
}
```

With the configuration in place running `./gradlew wrapper --gradle-version 4.1` is enough to produce a `distributionUrl` value in the Wrapper properties file that will request the `-all` distribution.

### Example 13. The generated distribution URL

```
gradle/wrapper/gradle-wrapper.properties.
```

```
distributionUrl=https\://services.gradle.org/distributions/gradle-4.1-all.zip
```

Check out the API documentation for more detail descriptions of the available configuration options. You can also find various samples for configuring the Wrapper in the Gradle distribution.

§

#### Authenticated Gradle distribution download

The Gradle `Wrapper` can download Gradle distributions from servers using HTTP Basic Authentication. This enables you to host the Gradle distribution on a private protected server. You can specify a username and password in two different ways depending on your use case: as system properties or directly embedded in the `distributionUrl`. Credentials in system properties take precedence over the ones embedded in `dist`.

#### Security Warning

HTTP Basic Authentication should only be used with `HTTPS` URLs and not plain `HTTP` ones. With Basic Authentication, the user credentials are sent in clear text.

Using system properties can be done in the `.gradle/gradle.properties` file in the user's home directory, or by other means, see the section called “Gradle properties”.

### Example 14. Specifying the HTTP Basic Authentication credentials using system properties

```
gradle.properties.
```

```
systemProp.gradle.wrapperUser=username
```

```
systemProp.gradle.wrapperPassword=password
```

Embedding credentials in the `distributionUrl` in the `gradle/wrapper/gradle-wrapper.properties` file also works. Please note that this file is to be committed into your source control system. Shared credentials embedded in `distributionUrl` should only be used in a controlled environment.

### Example 15. Specifying the HTTP Basic Authentication credentials in `distributionUrl`

```
gradle/wrapper/gradle-wrapper.properties.
```

```
distributionUrl=https://username:password@somehost/path/to/gradle-distribution.z
```

This can be used in conjunction with a proxy, authenticated or not. See the section called “Accessing the web through a HTTP proxy” for more information on how to configure the `Wrapper` to use a proxy.

§

## Verification of downloaded Gradle distributions

The Gradle Wrapper allows for verification of the downloaded Gradle distribution via SHA-256 hash sum comparison. This increases security against targeted attacks by preventing a man-in-the-middle attacker from tampering with the downloaded Gradle distribution.

To enable this feature, download the `.sha256` file associated with the Gradle distribution you want to verify.

§

### Downloading the SHA-256 file

You can download the `.sha256` file from the stable releases or release candidate and nightly releases. The format of the file is a single line of text that is the SHA-256 hash of the corresponding zip file.

§

### Configuring checksum verification

Add the downloaded hash sum to `gradle-wrapper.properties` using the `distributionSha256Sum` property or use `--gradle-distribution-sha256-sum` on the command-line.

#### Example 16. Configuring SHA-256 checksum verification

**`gradle/wrapper/gradle-wrapper.properties.`**

```
distributionSha256Sum=371cb9fbebbe9880d147f59bab36d61eee122854ef8c9ee1ecf12b8236;
```

Gradle will report a build failure in case the configured checksum does not match the checksum found on the server for hosting the distribution. Checksum Verification is only performed if the configured Wrapper distribution hasn't been downloaded yet.

# The Gradle Daemon

From Wikipedia...

A daemon is a computer program that runs as a background process, rather than being under the direct control of an interactive user.

Gradle runs on the Java Virtual Machine (JVM) and uses several supporting libraries that require a non-trivial initialization time. As a result, it can sometimes seem a little slow to start. The solution to this problem is the Gradle *Daemon*: a long-lived background process that executes your builds much more quickly than would otherwise be the case. We accomplish this by avoiding the expensive bootstrapping process as well as leveraging caching, by keeping data about your project in memory. Running Gradle builds with the Daemon is no different than without. Simply configure whether you want to use it or not - everything else is handled transparently by Gradle.

§

## Why the Gradle Daemon is important for performance

The Daemon is a long-lived process, so not only are we able to avoid the cost of JVM startup for every build, but we are able to cache information about project structure, files, tasks, and more in memory.

The reasoning is simple: improve build speed by reusing computations from previous builds. However, the benefits are dramatic: we typically measure build times reduced by 15-75% on subsequent builds. We recommend profiling your build by using `--profile` to get a sense of how much impact the Gradle Daemon can have for you.

The Gradle Daemon is enabled by default starting with Gradle 3.0, so you don't have to do anything to benefit from it.

If you run CI builds in ephemeral environments (such as containers) that do not reuse any processes, use of the Daemon will slightly decrease performance (due to caching additional information) for no benefit, and may be disabled.

§

## Running Daemon Status

To get a list of running Gradle Daemons and their statuses use the `--status` command.

Sample output:



PID	VERSION	STATUS
28411	3.0	IDLE
34247	3.0	BUSY

Currently, a given Gradle version can only connect to daemons of the same version. This means the status output will only show Daemons for the version of Gradle being invoked and not for any other versions. Future versions of Gradle will lift this constraint and will show the running Daemons for all versions of Gradle.

§

## Disabling the Daemon

The Gradle Daemon is enabled by default, and we recommend always enabling it. There are several ways to disable the Daemon, but the most common one is to add the line

```
org.gradle.daemon=false
```

to the file `«USER_HOME»/.gradle/gradle.properties`, where `«USER_HOME»` is your home directory. That's typically one of the following, depending on your platform:

`C:\Users\<username>` (Windows Vista & 7+)

`/Users/<username>` (macOS)

`/home/<username>` (Linux)

If that file doesn't exist, just create it using a text editor. You can find details of other ways to disable (and enable) the Daemon in the section called "FAQ" further down. That section also contains more detailed information on how the Daemon works.

Note that having the Daemon enabled, all your builds will take advantage of the speed boost, regardless of the version of Gradle a particular build uses.

### Continuous integration

Since Gradle 3.0, we enable Daemon by default and recommend using it for both developers' machines and Continuous Integration servers. However, if you suspect that Daemon makes your CI builds unstable, you can disable it to use a fresh runtime for each build since the runtime is *completely* isolated from any previous builds.

§

## Stopping an existing Daemon

As mentioned, the Daemon is a background process. You needn't worry about a build up of Gradle processes on your machine, though. Every Daemon monitors its memory usage compared to total system memory and will stop itself if idle when available system memory is low. If you want to explicitly stop running Daemon processes for any reason, just use the command `gradle --stop`.

This will terminate all Daemon processes that were started with the same version of Gradle used to execute the command. If you have the Java Development Kit (JDK) installed, you can easily verify that a Daemon has stopped by running the `jps` command. You'll see any running Daemons listed with the name `GradleDa`.

§

## FAQ

§

How do I disable the Gradle Daemon?

There are two recommended ways to disable the Daemon persistently for an environment:

Via environment variables: add the flag `-Dorg.gradle.daemon=false` to the `GRADLE_OPTS` environment variable

Via properties file: add `org.gradle.daemon=false` to the `«GRADLE_USER_HOME»/gradle.properties` file

**Note:** Note, `«GRADLE_USER_HOME»` defaults to `«USER_HOME»/.gradle`, where `«USER_HOME»` is the home directory of the current user. This location can be configured via the `-g` and `--gradle-user` command line switches, as well as by the `GRADLE_USER_HOME` environment variable and `org.gradle` JVM system property.

Both approaches have the same effect. Which one to use is up to personal preference. Most Gradle users choose the second option and add the entry to the user `gradle.properties` file.

On Windows, this command will disable the Daemon for the current user:

```
(if not exist "%USERPROFILE%\.gradle" mkdir "%USERPROFILE%\.gradle") && (echo. >:)
```

On UNIX-like operating systems, the following Bash shell command will disable the Daemon for the current user:

```
mkdir -p ~/.gradle && echo "org.gradle.daemon=false" >> ~/.gradle/gradle.properties
```

Once the Daemon is disabled for a build environment in this way, a Gradle Daemon will not be started unless explicitly requested using the `--daemon` option.

The `--daemon` and `--no-daemon` command line options enable and disable usage of the Daemon for individual build invocations when using the Gradle command line interface. These command line options have the *highest* precedence when considering the build environment. Typically, it is more convenient to enable the Daemon for an environment (e.g. a user account) so that all builds use the Daemon without requiring to remember to supply the `--daemon` option.

§

Why is there more than one Daemon process on my machine?

There are several reasons why Gradle will create a new Daemon, instead of using one that is already running. The basic rule is that Gradle will start a new Daemon if there are no existing idle or compatible Daemons available. Gradle will kill any Daemon that has been idle for 3 hours or more, so you don't have to worry about cleaning them up manually.

#### **idle**

An idle Daemon is one that is not currently executing a build or doing other useful work.

#### **compatible**

A compatible Daemon is one that can (or can be made to) meet the requirements of the requested build environment. The Java runtime used to execute the build is an example aspect of the build environment. Another example is the set of JVM system properties required by the build runtime.

Some aspects of the requested build environment may not be met by an Daemon. If the Daemon is running with a Java 7 runtime, but the requested environment calls for Java 8, then the Daemon is not compatible and another must be started. Moreover, certain properties of a Java runtime cannot be changed once the JVM has started. For example, it is not possible to change the memory allocation (e.g. `-Xmx1024m`), default text encoding, default locale, etc of a running JVM.

The “requested build environment” is typically constructed implicitly from aspects of the build client's (e.g. Gradle command line client, IDE etc.) environment and explicitly via command line switches and settings. See *Build Environment* for details on how to specify and control the build environment.

The following JVM system properties are effectively immutable. If the requested build environment requires any of these properties, with a different value than a Daemon's JVM has for this property, the Daemon is not compatible.

`file.encoding`

`user.language`

`user.country`

`user.variant`

`java.io.tmpdir`

`javax.net.ssl.keyStore`

`javax.net.ssl.keyStorePassword`

`javax.net.ssl.keyStoreType`

`javax.net.ssl.trustStore`

`javax.net.ssl.trustStorePassword`

javax.net.ssl.trustStoreType

com.sun.management.jmxremote

The following JVM attributes, controlled by startup arguments, are also effectively immutable. The corresponding attributes of the requested build environment and the Daemon's environment must match exactly in order for a Daemon to be compatible.

The maximum heap size (i.e. the -Xmx JVM argument)

The minimum heap size (i.e. the -Xms JVM argument)

The boot classpath (i.e. the -Xbootclasspath argument)

The "assertion" status (i.e. the -ea argument)

The required Gradle version is another aspect of the requested build environment. Daemon processes are coupled to a specific Gradle runtime. Working on multiple Gradle projects during a session that use different Gradle versions is a common reason for having more than one running Daemon process.

§

How much memory does the Daemon use and can I give it more?

If the requested build environment does not specify a maximum heap size, the Daemon will use up to 1GB of heap. It will use the JVM's default minimum heap size. 1GB is more than enough for most builds. Larger builds with hundreds of subprojects, lots of configuration, and source code may require, or perform better, with more memory.

To increase the amount of memory the Daemon can use, specify the appropriate flags as part of the requested build environment. Please see *Build Environment* for details.

§

How can I stop a Daemon?

Daemon processes will automatically terminate themselves after 3 hours of inactivity or less. If you wish to stop a Daemon process before this, you can either kill the process via your operating system or run the `grad` command. The `--stop` switch causes Gradle to request that *all* running Daemon processes, *of the same Gradle version used to run the command*, terminate themselves.

§

What can go wrong with Daemon?

Considerable engineering effort has gone into making the Daemon robust, transparent and unobtrusive during day to day development. However, Daemon processes can occasionally be corrupted or exhausted. A Gradle build executes arbitrary code from multiple sources. While Gradle itself is designed for and heavily tested with the Daemon, user build scripts and third party plugins can destabilize the Daemon process through defects such as memory leaks or global state corruption.

It is also possible to destabilize the Daemon (and build environment in general) by running builds that do not release resources correctly. This is a particularly poignant problem when using Microsoft Windows as it is less forgiving of programs that fail to close files after reading or writing.

Gradle actively monitors heap usage and attempts to detect when a leak is starting to exhaust the available heap space in the daemon. When it detects a problem, the Gradle daemon will finish the currently running build and proactively restart the daemon on the next build. This monitoring is enabled by default, but can be disabled by setting the `org.gradle.daemon.performance.enable-monitoring` system property to false.

If it is suspected that the Daemon process has become unstable, it can simply be killed. Recall that the `--no` switch can be specified for a build to prevent use of the Daemon. This can be useful to diagnose whether or not the Daemon is actually the culprit of a problem.

§

## Tools & IDEs

The Gradle Tooling API (see *Embedding Gradle using the Tooling API*), that is used by IDEs and other tools to integrate with Gradle, *always* use the Gradle Daemon to execute builds. If you are executing Gradle builds from within your IDE you are using the Gradle Daemon and do not need to enable it for your environment.

§

## How does the Gradle Daemon make builds faster?

The Gradle Daemon is a *long lived* build process. In between builds it waits idly for the next build. This has the obvious benefit of only requiring Gradle to be loaded into memory once for multiple builds, as opposed to once for each build. This in itself is a significant performance optimization, but that's not where it stops.

A significant part of the story for modern JVM performance is runtime code optimization. For example, HotSpot (the JVM implementation provided by Oracle and used as the basis of OpenJDK) applies optimization to code while it is running. The optimization is progressive and not instantaneous. That is, the code is progressively optimized during execution which means that subsequent builds can be faster purely due to this optimization process. Experiments with HotSpot have shown that it takes somewhere between 5 and 10 builds for optimization to stabilize. The difference in perceived build time between the first build and the 10th for a Daemon can be quite dramatic.

The Daemon also allows more effective in memory caching across builds. For example, the classes needed by the build (e.g. plugins, build scripts) can be held in memory between builds. Similarly, Gradle can maintain in-memory caches of build data such as the hashes of task inputs and outputs, used for incremental building.

# Dependency Management for Java Projects

This chapter explains how to apply basic dependency management concepts to Java-based projects. For a detailed introduction to dependency management, see *Introduction to Dependency Management*.

## §

### Dissecting a typical build script

Let's have a look at a very simple build script for a Java-based project. It applies the Java Library plugin which automatically introduces a standard project layout, provides tasks for performing typical work and adequate support for dependency management.

#### Example 17. Dependency declarations for a Java-based project

##### **build.gradle**

```
apply plugin: 'java-library'

repositories {
    mavenCentral()
}

dependencies {
    implementation 'org.hibernate:hibernate-core:3.6.7.Final'
    api 'com.google.guava:guava:23.0'
    testImplementation 'junit:junit:4.+'
}
```

The `Project.dependencies{}` code block declares that Hibernate core 3.6.7.Final is required to compile the project's production source code. It also states that junit >= 4.0 is required to compile the project's tests. All dependencies are supposed to be looked up in the Maven Central repository as defined by `Project.repositories{}`. The following sections explain each aspect in more detail.

## §

### Declaring module dependencies

There are various types of dependencies that you can declare. One such type is a *module dependency*. A module dependency represents a dependency on a module with a specific version built outside the current build. Modules are usually stored in a repository, such as Maven Central, a corporate Maven or Ivy repository, or a directory in the local file system.

To define an module dependency, you add it to a dependency configuration:

#### Example 18. Definition of a module dependency

```
build.gradle
dependencies {
    implementation 'org.hibernate:hibernate-core:3.6.7.Final'
}
```

To find out more about defining dependencies, have a look at *Declaring Dependencies*.

## §

### Using dependency configurations

A *Configuration* is a named set of dependencies and artifacts. There are three main purposes for a *configuration*:

#### Declaring dependencies

A plugin uses configurations to make it easy for build authors to declare what other subprojects or external artifacts are needed for various purposes during the execution of tasks defined by the plugin. For example a plugin may need the Spring web framework dependency to compile the source code.

#### Resolving dependencies

A plugin uses configurations to find (and possibly download) inputs to the tasks it defines. For example Gradle needs to download Spring web framework JAR files from Maven Central.

#### Exposing artifacts for consumption

A plugin uses configurations to define what *artifacts* it generates for other projects to consume. For example the project would like to publish its compiled source code packaged in the JAR file to an in-house Artifactory repository.

With those three purposes in mind, let's take a look at a few of the standard configurations defined by the Java Library Plugin.

#### implementation

The dependencies required to compile the production source of the project which *are not* part of the API exposed by the project. For example the project uses Hibernate for its internal persistence layer implementation.

## api

The dependencies required to compile the production source of the project which *are* part of the API exposed by the project. For example the project uses Guava and exposes public interfaces with Guava classes in their method signatures.

## testImplementation

The dependencies required to compile and run the test source of the project. For example the project decided to write test code with the test framework JUnit.

Various plugins add further standard configurations. You can also define your own custom configurations in your build via `Project.configurations{}`. See *Managing Dependency Configurations* for the details of defining and customizing dependency configurations.

## §

# Declaring common Java repositories

How does Gradle know where to find the files for external dependencies? Gradle looks for them in a *repository*. A repository is a collection of modules, organized by `group`, `name` and `version`. Gradle understands different repository types, such as Maven and Ivy, and supports various ways of accessing the repository via HTTP or other protocols.

By default, Gradle does not define any repositories. You need to define at least one with the help of `Project.repositories{}` before you can use module dependencies. One option is use the Maven Central repository:

### Example 19. Usage of Maven central repository

```
build.gradle
repositories {
    mavenCentral()
}
```

You can also have repositories on the local file system. This works for both Maven and Ivy repositories.

### Example 20. Usage of a local Ivy directory

```
build.gradle
repositories {
    ivy {
        // URL can refer to a local directory
        url "../local-repo"
    }
}
```

A project can have multiple repositories. Gradle will look for a dependency in each repository in the order they are specified, stopping at the first repository that contains the requested module.



To find out more about defining repositories, have a look at *Declaring Repositories*.

## §

### Publishing artifacts

Dependency configurations are also used to publish files. Gradle calls these files *publication artifacts*, or usually just *artifacts*. As a user you will need to tell Gradle where to publish the artifacts. You do this by declaring repositories for the `uploadArchives` task. Here's an example of publishing to a Maven repository:

#### Example 21. Publishing to a Maven repository

##### **build.gradle**

```
apply plugin: 'maven'

uploadArchives {
    repositories {
        mavenDeployer {
            repository(url: "file://localhost/tmp/myRepo/")
        }
    }
}
```

Now, when you run `gradle uploadArchives`, Gradle will build the JAR file, generate a `.pom` file and upload the artifacts.

To learn more about publishing artifacts, have a look at *Legacy publishing*.

# Executing Multi-Project Builds

Only the smallest of projects has a single build file and source tree, unless it happens to be a massive, monolithic application. It's often much easier to digest and understand a project that has been split into smaller, inter-dependent modules. The word "inter-dependent" is important, though, and is why you typically want to link the modules together through a single build.

Gradle supports this scenario through *multi-project* builds.

§

## Structure of a multi-project build

Such builds come in all shapes and sizes, but they do have some common characteristics:

A `settings.gradle` file in the root or `master` directory of the project

A `build.gradle` file in the root or `master` directory

Child directories that have their own `*.gradle` build files (some multi-project builds may omit child project build scripts)

The `settings.gradle` file tells Gradle how the project and subprojects are structured. Fortunately, you don't have to read this file simply to learn what the project structure is as you can run the command `gradle`. Here's the output from using that command on the Java *multiproject* build in the Gradle samples:

## Example 22. Listing the projects in a build

### Output of `gradle -q projects`

```
> gradle -q projects
```

```
-----  
Root project  
-----
```

```
Root project 'multiproject'  
+--- Project ':api'  
+--- Project ':services'  
|    +--- Project ':services:shared'  
|    \--- Project ':services:webservice'  
\--- Project ':shared'
```

To see a list of the tasks of a project, run `gradle <project-path>:tasks`  
For example, try running `gradle :api:tasks`

This tells you that *multiproject* has three immediate child projects: *api*, *services* and *shared*. The *services* project then has its own children, *shared* and *webservice*. These map to the directory structure, so it's easy to find them. For example, you can find *webservice* in `<root>/services/webservice`.

By default, Gradle uses the name of the directory it finds the `settings.gradle` as the name of the root project. This usually doesn't cause problems since all developers check out the same directory name when working on a project. On Continuous Integration servers, like Jenkins, the directory name may be auto-generated and not match the name in your VCS. For that reason, it's recommended that you always set the root project name to something predictable, even in single project builds. You can configure the root project name by setting `rootProject.name`.

Each project will usually have its own build file, but that's not necessarily the case. In the above example, the *services* project is just a container or grouping of other subprojects. There is no build file in the corresponding directory. However, *multiproject* does have one for the root project.

The root `build.gradle` is often used to share common configuration between the child projects, for example by applying the same sets of plugins and dependencies to all the child projects. It can also be used to configure individual subprojects when it is preferable to have all the configuration in one place. This means you should always check the root build file when discovering how a particular subproject is being configured.

Another thing to bear in mind is that the build files might not be called `build.gradle`. Many projects will name the build files after the subproject names, such as `api.gradle` and `services.gradle` from the previous example. Such an approach helps a lot in IDEs because it's tough to work out which `build.gradle` file out of twenty possibilities is the one you want to open. This little piece of magic is handled by the `settings` file, but as a build user you don't need to know the details of how it's done. Just have a look through the child project directories to find the files with the `.gradle` suffix.

Once you know what subprojects are available, the key question for a build user is how to execute the tasks within the project.

## §

### Executing a multi-project build

From a user's perspective, multi-project builds are still collections of tasks you can run. The difference is that you may want to control *which* project's tasks get executed. You have two options here:

Change to the directory corresponding to the subproject you're interested in and just execute `gradle <task>` as normal.

Use a qualified task name from any directory, although this is usually done from the root. For example: `gradle :services:webservice` will build the *webservice* subproject and any subprojects it depends on.

The first approach is similar to the single-project use case, but Gradle works slightly differently in the case of a multi-project build. The command `gradle test` will execute the `test` task in any subprojects, relative to the current working directory, that have that task. So if you run the command from the root project directory, you'll run `test` in *api*, *shared*, *services:shared* and *services:webservice*. If you run the command from the *services* project directory, you'll only execute the task in *services:shared* and *services:webservice*.

For more control over what gets executed, use qualified names (the second approach mentioned). These are paths just like directory paths, but use `':'` instead of `'/'` or `'\'`. If the path begins with a `':'`, then the path is resolved relative to the root project. In other words, the leading `':'` represents the root project itself. All other colons are path separators.

This approach works for any task, so if you want to know what tasks are in a particular subproject, just use the `tasks` task, e.g. `gradle :services:webservice:tasks`.

Regardless of which technique you use to execute tasks, Gradle will take care of building any subprojects that the target depends on. You don't have to worry about the inter-project dependencies yourself. If you're interested in how this is configured, you can read about writing multi-project builds later in the user guide.

There's one last thing to note. When you're using the Gradle wrapper, the first approach doesn't work well because you have to specify the path to the wrapper script if you're not in the project root. For example, if you're in the *webservice* subproject directory, you would have to run `../../gradlew build`.

That's all you really need to know about multi-project builds as a build user. You can now identify whether a build is a multi-project one and you can discover its structure. And finally, you can execute tasks within specific subprojects.

# Composite builds

**Note:** Composite build is an incubating feature. While useful for many use cases, there are bugs to be discovered, rough edges to smooth, and enhancements we plan to make. Thanks for trying it out!

§

## What is a composite build?

A composite build is simply a build that includes other builds. In many ways a composite build is similar to a Gradle multi-project build, except that instead of including single `projects`, complete `builds` are included.

Composite builds allow you to:

combine builds that are usually developed independently, for instance when trying out a bug fix in a library that your application uses

decompose a large multi-project build into smaller, more isolated chunks that can be worked in independently or together as needed

A build that is included in a composite build is referred to, naturally enough, as an "included build". Included builds do not share any configuration with the composite build, or the other included builds. Each included build is configured and executed in isolation.

Included builds interact with other builds via `dependency substitution`. If any build in the composite has a dependency that can be satisfied by the included build, then that dependency will be replaced by a project dependency on the included build.

By default, Gradle will attempt to determine the dependencies that can be substituted by an included build. However for more flexibility, it is possible to explicitly declare these substitutions if the default ones determined by Gradle are not correct for the composite. See the section called "Declaring the dependencies substituted by an included build".

As well as consuming outputs via project dependencies, a composite build can directly declare task dependencies on included builds. Included builds are isolated, and are not able to declare task dependencies on the composite build or on other included builds. See the section called "Depending on tasks in an included build".

§

## Defining a composite build

The following examples demonstrate the various ways that 2 Gradle builds that are normally developed separately can be combined into a composite build. For these examples, the `my-utils` multi-project build produces 2 different java libraries (`number-utils` and `string-utils`), and the `my-app` build produces an executable using functions from those libraries.

The `my-app` build does not have direct dependencies on `my-utils`. Instead, it declares binary dependencies on the libraries produced by `my-utils`.

### Example 23. Dependencies of my-app

#### `my-app/build.gradle`

```
apply plugin: 'java'
apply plugin: 'application'
apply plugin: 'idea'

group "org.sample"
version "1.0"

mainClassName = "org.sample.myapp.Main"

dependencies {
    compile "org.sample:number-utils:1.0"
    compile "org.sample:string-utils:1.0"
}

repositories {
    jcenter()
}
```

**Note:** The code for this example can be found at `samples/compositeBuilds/basic` in the ‘-all’ distribution of Gradle.

§

## Defining a composite build via `--include-build`

The `--include-build` command-line argument turns the executed build into a composite, substituting dependencies from the included build into the executed build.

### Example 24. Declaring a command-line composite

Output of `gradle --include-build ../my-utils run`

```
> gradle --include-build ../my-utils run
> Task :processResources NO-SOURCE
> Task :my-utils:string-utils:compileJava
> Task :my-utils:string-utils:processResources NO-SOURCE
> Task :my-utils:string-utils:classes
> Task :my-utils:string-utils:jar
> Task :my-utils:number-utils:compileJava
> Task :my-utils:number-utils:processResources NO-SOURCE
> Task :my-utils:number-utils:classes
> Task :my-utils:number-utils:jar
> Task :compileJava
> Task :classes

> Task :run
The answer is 42

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

§

#### Defining a composite build via `settings.gradle`

It's possible to make the above arrangement persistent, by using `Settings.includeBuild(java.lang.Object)` to declare the included build in the `settings.gradle` file. The `settings.gradle` file can be used to add subprojects and included builds at the same time. Included builds are added by location. See the examples below for more details.

§

#### Defining a separate composite build

One downside of the above approach is that it requires you to modify an existing build, rendering it less useful as a standalone build. One way to avoid this is to define a separate composite build, whose only purpose is to combine otherwise separate builds.

### Example 25. Declaring a separate composite

**settings.gradle**

```
rootProject.name='adhoc'

includeBuild '../my-app'
includeBuild '../my-utils'
```

In this scenario, the 'main' build that is executed is the composite, and it doesn't define any useful tasks to

execute itself. In order to execute the 'run' task in the 'my-app' build, the composite build must define a delegating task.

#### Example 26. Depending on task from included build

##### **build.gradle**

```
task run {
    dependsOn gradle.includedBuild('my-app').task(':run')
}
```

More details tasks that depend on included build tasks below.

§

#### Restrictions on included builds

Most builds can be included into a composite, however there are some limitations.

Every included build:

must have a `settings.gradle` file.

must not itself be a composite build.

must not have a `rootProject.name` the same as another included build.

must not have a `rootProject.name` the same as a top-level project of the composite build.

must not have a `rootProject.name` the same as the composite build `rootProject.name`.

§

## Interacting with a composite build

In general, interacting with a composite build is much the same as a regular multi-project build. Tasks can be executed, tests can be run, and builds can be imported into the IDE.

§

#### Executing tasks

Tasks from the composite build can be executed from the command line, or from you IDE. Executing a task will result in direct task dependencies being executed, as well as those tasks required to build dependency artifacts from included builds.

**Note:** There is not (yet) any means to directly execute a task from an included build via the command line. Included build tasks are automatically executed in order to generate required dependency artifacts, or the including build can declare a dependency on a task from an included build.



§

## Importing into the IDE

One of the most useful features of composite builds is IDE integration. By applying the idea or eclipse plugin to your build, it is possible to generate a single IDEA or Eclipse project that permits all builds in the composite to be developed together.

In addition to these Gradle plugins, recent versions of IntelliJ IDEA and Eclipse Buildship support direct import of a composite build.

Importing a composite build permits sources from separate Gradle builds to be easily developed together. For every included build, each sub-project is included as an IDEA Module or Eclipse Project. Source dependencies are configured, providing cross-build navigation and refactoring.

§

## Declaring the dependencies substituted by an included build

By default, Gradle will configure each included build in order to determine the dependencies it can provide. The algorithm for doing this is very simple: Gradle will inspect the group and name for the projects in the included build, and substitute project dependencies for any external dependency matching `${project.group}.*`.

There are cases when the default substitutions determined by Gradle are not sufficient, or they are not correct for a particular composite. For these cases it is possible to explicitly declare the substitutions for an included build. Take for example a single-project build 'unpublished', that produces a java utility library but does not declare a value for the group attribute:

### Example 27. Build that does not declare group attribute

```
build.gradle
apply plugin: 'java'
```

When this build is included in a composite, it will attempt to substitute for the dependency module "undefined:unpublished" ("undefined" being the default value for `project.group`, and 'unpublished' being the root project name). Clearly this isn't going to be very useful in a composite build. To use the unpublished library unmodified in a composite build, the composing build can explicitly declare the substitutions that it provides:

## Example 28. Declaring the substitutions for an included build

### `settings.gradle`

```
rootProject.name = 'app'

includeBuild('../anonymous-library') {
    dependencySubstitution {
        substitute module('org.sample:number-utils') with project(':')
    }
}
```

With this configuration, the "my-app" composite build will substitute any dependency on `org.sample:number-utils` with a dependency on the root project of "unpublished".

§

### Cases where included build substitutions must be declared

Many builds that use the `uploadArchives` task to publish artifacts will function automatically as an included build, without declared substitutions. Here are some common cases where declared substitutions are required:

When the `archivesBaseName` property is used to set the name of the published artifact.

When a configuration other than `default` is published: this usually means a task other than `uploadArchives` is used.

When the `MavenPom.addFilter()` is used to publish artifacts that don't match the project name.

When the `maven-publish` or `ivy-publish` plugins are used for publishing, and the publication coordinates don't match `${project.group}:${project.name}`.

§

### Cases where composite build substitutions won't work

Some builds won't function correctly when included in a composite, even when dependency substitutions are explicitly declared. This limitation is due to the fact that a project dependency that is substituted will always point to the `default` configuration of the target project. Any time that the artifacts and dependencies specified for the default configuration of a project don't match what is actually published to a repository, then the composite build may exhibit different behaviour.

Here are some cases where the publish module metadata may be different from the project default configuration:

When a configuration other than `default` is published.

When the `maven-publish` or `ivy-publish` plugins are used.

When the `POM` or `ivy.xml` file is tweaked as part of publication.

Builds using these features function incorrectly when included in a composite build. We plan to improve this in the future.

§

## Depending on tasks in an included build

While included builds are isolated from one another and cannot declare direct dependencies, a composite build is able to declare task dependencies on its included builds. The included builds are accessed using `Gradle.getIncludedBuilds()` or `Gradle.includedBuild(java.lang.String)`, and a task reference is obtained via the `IncludedBuild.task(java.lang.String)` method.

Using these APIs, it is possible to declare a dependency on a task in a particular included build, or tasks with a certain path in all or some of the included builds.

### Example 29. Depending on a single task from an included build

**build.gradle**

```
task run {
    dependsOn gradle.includedBuild('my-app').task(':run')
}
```

### Example 30. Depending on a tasks with path in all included builds

**build.gradle**

```
task publishDeps {
    dependsOn gradle.includedBuilds*.task(':uploadArchives')
}
```

§

## Current limitations and future plans for composite builds

We think composite builds are pretty useful already. However, there are some things that don't yet work the way we'd like, and other improvements that we think will make things work even better.

Limitations of the current implementation include:

No support for included builds that have publications that don't mirror the project default configuration. See the section called "Cases where composite build substitutions won't work".

Native builds are not supported. (Binary dependencies are not yet supported for native builds).

Substituting plugins only works with the `buildscript` block but not with the `plugins` block.

Improvements we have planned for upcoming releases include:

Better detection of dependency substitution, for build that publish with custom coordinates, builds that produce multiple components, etc. This will reduce the cases where dependency substitution needs to be

explicitly declared for an included build.

The ability to target a task or tasks in an included build directly from the command line. We are currently exploring syntax options for allowing this functionality, which will remove many cases where a delegating task is required in the composite.

Making the implicit `buildSrc` project an included build.

Supporting composite-of-composite builds.

# Build Environment

Gradle provides multiple mechanisms for configuring behavior of Gradle itself and specific projects. The following is a reference for using these mechanisms.

When configuring Gradle behavior you can use these methods, listed in order of highest to lowest precedence (first one wins):

Command-line flags such as `--build-cache`. These have precedence over properties and environment variables.

System properties such as `systemProp.http.proxyHost=somehost.org` stored in a `gradle.properties` file.

Gradle properties such as `org.gradle.caching=true` that are typically stored in a `gradle.properties` file in a project root directory or `GRADLE_USER_HOME` environment variable.

Environment variables such as `GRADLE_OPTS` sourced by the environment that executes Gradle.

Aside from configuring the build environment, you can configure a given project build using Project properties such as `-PreleaseType=final`.

## §

### Gradle properties

Gradle provides several options that make it easy to configure the Java process that will be used to execute your build. While it's possible to configure these in your local environment via `GRADLE_OPTS` or `JAVA_OPTS`, it is useful to store certain settings like JVM memory configuration and Java home location in version control so that an entire team can work with a consistent environment.

Setting up a consistent environment for your build is as simple as placing these settings into a `gradle.properties` file. The configuration is applied in following order (if an option is configured in multiple locations the *last one wins*):

`gradle.properties` in project root directory.

`gradle.properties` in `GRADLE_USER_HOME` directory.

system properties, e.g. when `-Dgradle.user.home` is set on the command line.

The following properties can be used to configure the Gradle build environment:

**`org.gradle.caching=(true,false)`**

When set to `true`, Gradle will reuse task outputs from any previous build, when possible, resulting in much faster builds. Learn more about using the build cache.

**`org.gradle.caching.debug=(true,false)`**

When set to `true`, individual input property hashes and the build cache key for each task are logged on the console. Learn more about task output caching.

**`org.gradle.configureondemand=(true,false)`**

Enables incubating configuration on demand, where Gradle will attempt to configure only necessary projects.

**`org.gradle.console=(auto,plain,rich,verbose)`**

Customize console output coloring or verbosity. Default depends on how Gradle is invoked. See command-line logging for additional details.

**`org.gradle.daemon=(true,false)`**

When set to `true` the Gradle Daemon is used to run the build. Default is `true`.

**`org.gradle.daemon.idletimeout=(# of idle millis)`**

Gradle Daemon will terminate itself after specified number of idle milliseconds. Default is 10800000 (3 hours).

**`org.gradle.debug=(true,false)`**

When set to `true`, Gradle will run the build with remote debugging enabled, listening on port 5005. Note that this is the equivalent of adding `-agentlib:jdwp=transport=dt_socket,server=y,suspend=` to the JVM command line and will suspend the virtual machine until a debugger is attached. Default is `false`.

**`org.gradle.java.home=(path to JDK home)`**

Specifies the Java home for the Gradle build process. The value can be set to either a `jdk` or `jre` location, however, depending on what your build does, using a JDK is safer. A reasonable default is used if the setting is unspecified.

**`org.gradle.jvmargs=(JVM arguments)`**

Specifies the JVM arguments used for the Gradle Daemon. The setting is particularly useful for configuring JVM memory settings for build performance.

**`org.gradle.logging.level=(quiet,warn,lifecycle,info,debug)`**

When set to `quiet`, `warn`, `lifecycle`, `info`, or `debug`, Gradle will use this log level. The values are not case sensitive. The `lifecycle` level is the default. See the section called “Choosing a log level”.

**`org.gradle.parallel=(true,false)`**

When configured, Gradle will fork up to `org.gradle.workers.max` JVMs to execute projects in parallel. To learn more about parallel task execution, see the Gradle performance guide.

```
org.gradle.warning.mode=(all,none,summary)
```

When set to `all`, `summary` or `none`, Gradle will use different warning type display. See the section called “Logging options” for details.

```
org.gradle.workers.max=(max # of worker processes)
```

When configured, Gradle will use a maximum of the given number of workers. Default is number of CPU processors. See also performance command-line options.

The following example demonstrates usage of various properties.

### Example 31. Setting properties with a `gradle.properties` file

#### **gradle.properties**

```
gradlePropertiesProp=gradlePropertiesValue
sysProp=shouldBeOverWrittenBySysProp
envProjectProp=shouldBeOverWrittenByEnvProp
systemProp.system=systemValue
```

#### **build.gradle**

```
task printProps {
    doLast {
        println commandLineProjectProp
        println gradlePropertiesProp
        println systemProjectProp
        println envProjectProp
        println System.properties[ 'system' ]
    }
}
```

```
Output of gradle -q -PcommandLineProjectProp=commandLineProjectPropValue
-Dorg.gradle.project.systemProjectProp=systemPropertyValue printProps
> gradle -q -PcommandLineProjectProp=commandLineProjectPropValue -Dorg.gradle.pr
commandLineProjectPropValue
gradlePropertiesValue
systemPropertyValue
envPropertyValue
systemValue
```

## §

## System properties

Using the `-D` command-line option, you can pass a system property to the JVM which runs Gradle. The `-D` option of the `gradle` command has the same effect as the `-D` option of the `java` command.

You can also set system properties in `gradle.properties` files with the prefix `systemProp`.

### Example 32. Specifying system properties in `gradle.properties`

```
systemProp.gradle.wrapperUser=myuser
systemProp.gradle.wrapperPassword=mypassword
```

The following system properties are available. Note that command-line options take precedence over system properties.

**`gradle.wrapperUser=(myuser)`**

Specify user name to download Gradle distributions from servers using HTTP Basic Authentication. Learn more in the section called “Authenticated Gradle distribution download”.

**`gradle.wrapperPassword=(mypassword)`**

Specify password for downloading a Gradle distribution using the Gradle wrapper.

**`gradle.user.home=(path to directory)`**

Specify the Gradle user home directory.

In a multi project build, “`systemProp.`” properties set in any project except the root will be ignored. That is, only the root project’s `gradle.properties` file will be checked for properties that begin with the “`systemP:`” prefix.

## §

### Environment variables

The following environment variables are available for the `gradle` command. Note that command-line options and system properties take precedence over environment variables.

**`GRADLE_OPTS`**

Specifies command-line arguments to use when starting the Gradle client. This can be useful for setting the properties to use when running Gradle.

**`GRADLE_USER_HOME`**

Specifies the Gradle user home directory (which defaults to `$USER_HOME/.gradle` if not set).

**`JAVA_HOME`**

Specifies the JDK installation directory to use.

## §

### Project properties

You can add properties directly to your `Project` object via the `-P` command line option.

Gradle can also set project properties when it sees specially-named system properties or environment variables. If the environment variable name looks like `ORG_GRADLE_PROJECT_prop=somevalue`, then Gradle will set a `prop` property on your project object, with the value of `somevalue`. Gradle also supports



this for system properties, but with a different naming pattern, which looks like `org.gradle.project.foo`. Both of the following will set the `foo` property on your `Project` object to `"bar"`.

#### Example 33. Setting a project property via `gradle.properties`

```
org.gradle.project.foo=bar
```

#### Example 34. Setting a project property via environment variable

```
ORG_GRADLE_PROJECT_foo=bar
```

**Note:** The properties file in the user's home directory has precedence over property files in the project directories.

This feature is very useful when you don't have admin rights to a continuous integration server and you need to set property values that should not be easily visible. Since you cannot use the `-P` option in that scenario, nor change the system-level configuration files, the correct strategy is to change the configuration of your continuous integration build job, adding an environment variable setting that matches an expected pattern. This won't be visible to normal users on the system.

You can access a project property in your build script simply by using its name as you would use a variable.

**Note:** If a project property is referenced but does not exist, an exception will be thrown and the build will fail.

You should check for existence of optional project properties before you access them using the `Project.hasProperty(java.lang.String)` method.

## §

### Configuring JVM memory

Gradle defaults to 1024 megabytes maximum heap per JVM process (`-Xmx1024m`), however, that may be too much or too little depending on the size of your project. There are many JVM options (this blog post on Java performance tuning and this reference may be helpful).

You can adjust JVM options for Gradle in the following ways:

The `JAVA_OPTS` environment variable is used for the Gradle client, but not forked JVMs.

#### Example 35. Changing JVM settings for Gradle client JVM

```
JAVA_OPTS="-Xmx2g -XX:MaxPermSize=256m -XX:+HeapDumpOnOutOfMemoryError -Dfile.encoding=UTF-8"
```

You need to use the `org.gradle.jvmargs` Gradle property to configure JVM settings for the Gradle Daemon.

### Example 36. Changing JVM settings for forked Gradle JVMs

```
org.gradle.jvmargs=-Xmx2g -XX:MaxPermSize=256m -XX:+HeapDumpOnOutOfMemoryError -l
```

**Note:** Many settings (like the Java version and maximum heap size) can only be specified when launching a new JVM for the build process. This means that Gradle must launch a separate JVM process to execute the build after parsing the various `gradle.properties` files.

When running with the Gradle Daemon, a JVM with the correct parameters is started once and reused for each daemon build execution. When Gradle is executed without the daemon, then a new JVM must be launched for every build execution, unless the JVM launched by the Gradle start script happens to have the same parameters.

Certain tasks in Gradle also fork additional JVM processes, like the `test` task when using `Test.setMaxParallelForks(int)` for JUnit or TestNG tests. You must configure these through the tasks themselves.


### Example 37. Set Java compile options for `JavaCompile` tasks

```
apply plugin: "java"

tasks.withType(JavaCompile) {
    options.compilerArgs += ["-Xdoclint:none", "-Xlint:none", "-nowarn"]
}
```

See other examples in the [Test](#) API documentation and test execution in the Java plugin reference.

Build scans will tell you information about the JVM that executed the build when you use the `--scan` option.

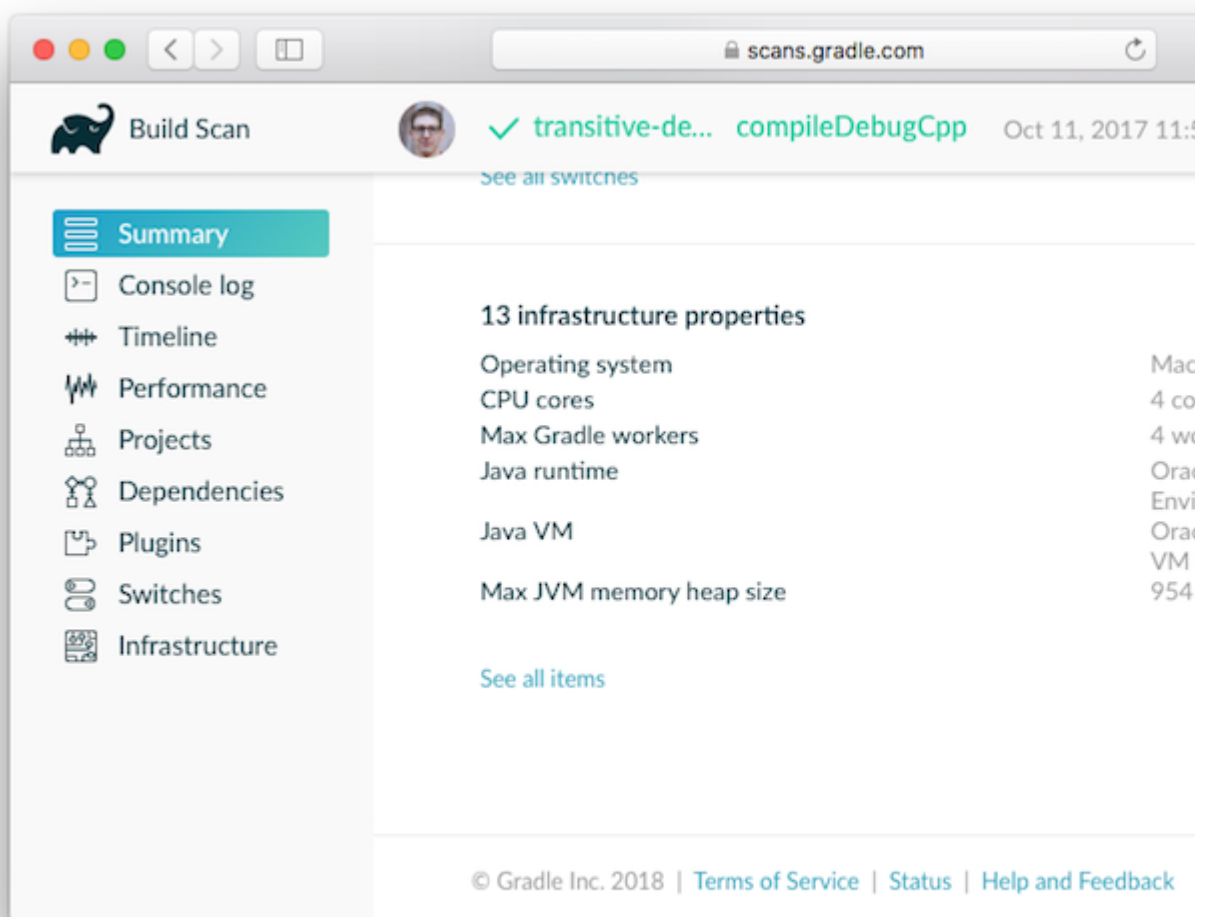

§

## Configuring a task using project properties

It's possible to change the behavior of a task based on project properties specified at invocation time.

Suppose you'd like to ensure release builds are only triggered by CI. A simple way to handle this is through an `isCI` project property.

### Example 38. Prevent releasing outside of CI

#### build.gradle

```
task performRelease {
    doLast {
        if (project.hasProperty("isCI")) {
            println("Performing release actions")
        } else {
            throw new InvalidUserDataException("Cannot perform release outside of CI")
        }
    }
}
```

#### Output of `gradle performRelease -PisCI=true --quiet`

```
> gradle performRelease -PisCI=true --quiet
Performing release actions
```

## §

### Accessing the web through a HTTP proxy

Configuring an HTTP or HTTPS proxy (for downloading dependencies, for example) is done via standard JVM system properties. These properties can be set directly in the build script; for example, setting the HTTP proxy host would be done with `System.setProperty('http.proxyHost', 'www.somehost.org')`. Alternatively, the properties can be specified in `gradle.properties`.

#### Example 39. Configuring an HTTP proxy using `gradle.properties`

```
systemProp.http.proxyHost=www.somehost.org
systemProp.http.proxyPort=8080
systemProp.http.proxyUser=userid
systemProp.http.proxyPassword=password
systemProp.http.nonProxyHosts=*.nonproxyrepos.com|localhost
```

There are separate settings for HTTPS.

#### Example 40. Configuring an HTTPS proxy using `gradle.properties`

```
systemProp.https.proxyHost=www.somehost.org
systemProp.https.proxyPort=8080
systemProp.https.proxyUser=userid
systemProp.https.proxyPassword=password
systemProp.https.nonProxyHosts=*.nonproxyrepos.com|localhost
```

You may need to set other properties to access other networks. Here are 2 references that may be helpful:

`ProxySetup.java` in the Ant codebase

§

## NTLM Authentication

If your proxy requires NTLM authentication, you may need to provide the authentication domain as well as the username and password. There are 2 ways that you can provide the domain for authenticating to a NTLM proxy:

Set the `http.proxyUser` system property to a value like *domain/username*.

Provide the authentication domain via the `http.auth.ntlm.domain` system property.

# Troubleshooting

The following is a collection of common issues and suggestions for addressing them. You can get other tips and search the Gradle forums and StackOverflow #gradle answers, as well as Gradle documentation from [help.gradle.org](https://help.gradle.org).

§

## Troubleshooting Gradle installation

If you followed the installation instructions, and aren't able to execute your Gradle build, here are some tips that may help.

If you installed Gradle outside of just invoking the Gradle Wrapper, you can check your Gradle installation by running `gradle --version` in a terminal.

You should see something like this:

```
gradle --version

-----
Gradle 4.6
-----

Build time:   2018-02-21 15:28:42 UTC
Revision:     819e0059da49f469d3e9b2896dc4e72537c4847d

Groovy:       2.4.12
Ant:          Apache Ant(TM) version 1.9.9 compiled on February 2 2017
JVM:          1.8.0_151 (Oracle Corporation 25.151-b12)
OS:           Mac OS X 10.13.3 x86_64
```

If not, here are some things you might see instead.

§

Command not found: gradle

If you get "command not found: gradle", you need to ensure that Gradle is properly added to your `PATH`.

§

## JAVA\_HOME is set to an invalid directory

If you get something like:

```
ERROR: JAVA_HOME is set to an invalid directory
```

```
Please set the JAVA_HOME variable in your environment to match the location of y
```

You'll need to ensure that a Java Development Kit version 7 or higher is properly installed, the `JAVA_HOME` environment variable is set, and Java is added to your [PATH](#).

§

## Permission denied

If you get "permission denied", that means that Gradle likely exists in the correct place, but it is not executable. You can fix this using `chmod +x path/to/executable` on \*nix-based systems.

§

## Other installation failures

If `gradle --version` works, but all of your builds fail with the same error, it is possible there is a problem with one of your Gradle build configuration scripts.

You can verify the problem is with Gradle scripts by running `gradle help` which executes configuration scripts, but no Gradle tasks. If the error persists, build configuration is problematic. If not, then the problem exists within the execution of one or more of the requested tasks (Gradle executes configuration scripts first, and then executes build steps).


§

## Debugging dependency resolution

Common dependency resolution issues such as resolving version conflicts are covered in *Troubleshooting Dependency Resolution*.

You can see a dependency tree and see which resolved dependency versions differed from what was requested by clicking the *Dependencies* view and using the search functionality, specifying the resolution reason.

Figure 4. Debugging dependency conflicts with build scans

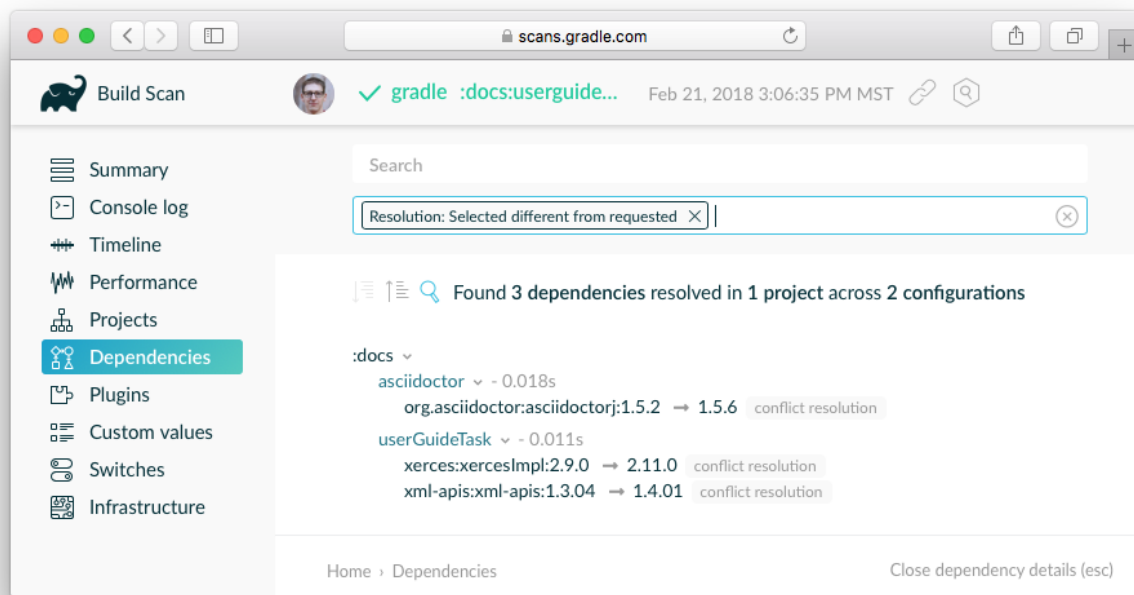

The actual build scan with filtering criteria is available for exploration.

§

## Troubleshooting slow Gradle builds

For build performance issues (including “slow sync time”), see the guide to Improving the Performance of Gradle Builds.

Android developers should watch a presentation by the Android SDK Tools team about Speeding Up Your Android Gradle Builds. Many tips are also covered in the Android Studio user guide on optimizing build speed.



§

## Debugging build logic

§

### Attaching a debugger to your build


You can set breakpoints and debug buildSrc and standalone plugins in your Gradle build itself by setting the `debug` property to “true” and then attaching a remote debugger to port 5005.

```
gradle help -Dorg.gradle.debug=true --no-daemon
```

In addition, if you’ve adopted the Kotlin DSL, you can also debug build scripts themselves.

The following video demonstrates how to debug an example build using IntelliJ IDEA.

**Figure 5. Interactive debugging of a build script**

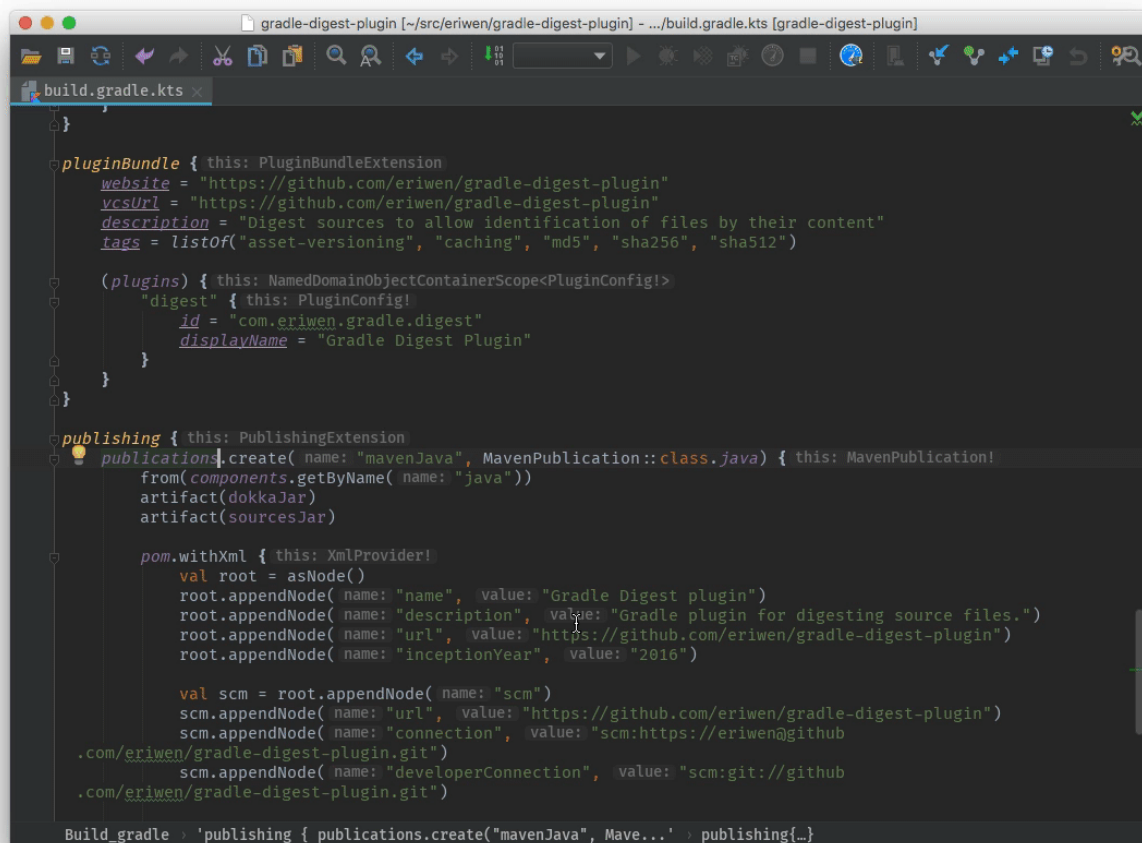

**Note:** You must either stop running Gradle Daemons or run with `--no-daemon` when using debug mode.

§

## Adding and changing logging

In addition to controlling logging verbosity, you can also control display of task outcomes (e.g. “UP-TO-DATE”) in lifecycle logging using the `--console=verbose` flag.

You can also replace much of Gradle’s logging with your own by registering various event listeners. One example of a custom event logger is explained in the logging documentation. You can also control logging from external tools, making them more verbose in order to debug their execution.


**Note:** Additional logs from the Gradle Daemon can be found under `GRADLE_USER_HOME/daemon/<gradle version>`.

§

## Task executed when it should have been UP-TO-DATE

`--info` logs explain why a task was executed, though build scans do this in a searchable, visual way by going to the *Timeline* view and clicking on the task you want to inspect.

Figure 6. Debugging incremental build with a build scan

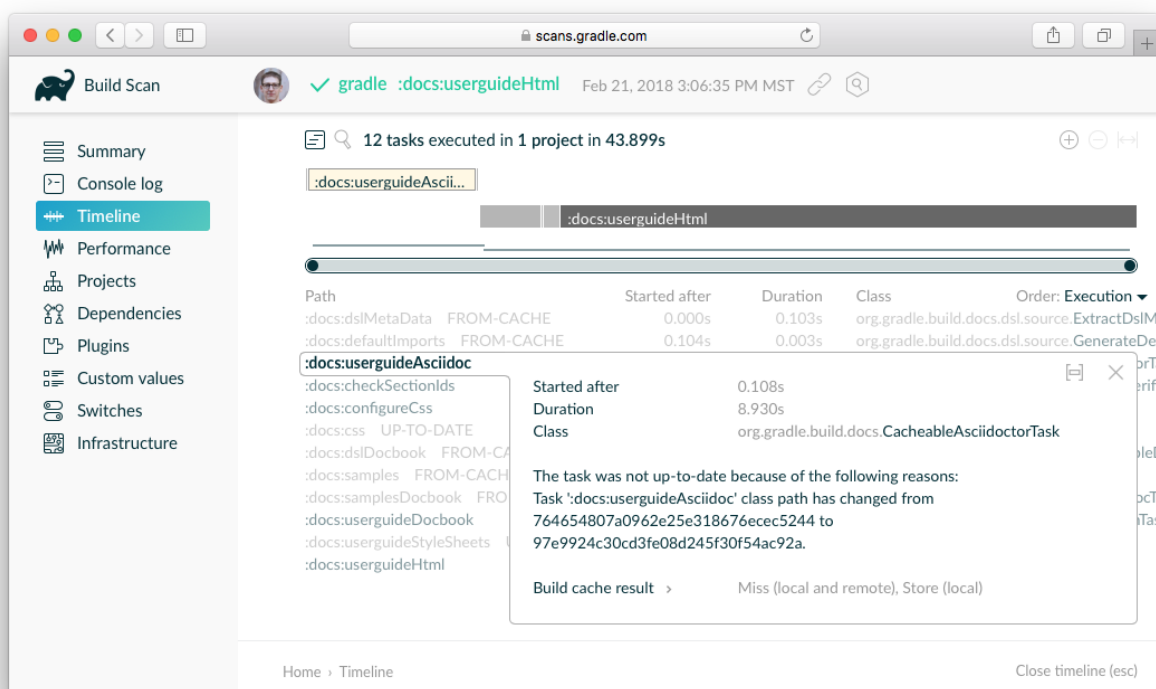

You can learn what the task outcomes mean from this listing.

§

## Debugging IDE integration

Many infrequent errors within IDEs can be solved by "refreshing" Gradle. See also more documentation on working with Gradle in IntelliJ IDEA and in Eclipse.


§

### Refreshing IntelliJ IDEA

**NOTE:** This only works for Gradle projects linked to IntelliJ.

From the main menu, go to `View > Tool Windows > Gradle`. Then click on the *Refresh* icon.

Figure 7. Refreshing a Gradle project in IntelliJ IDEA

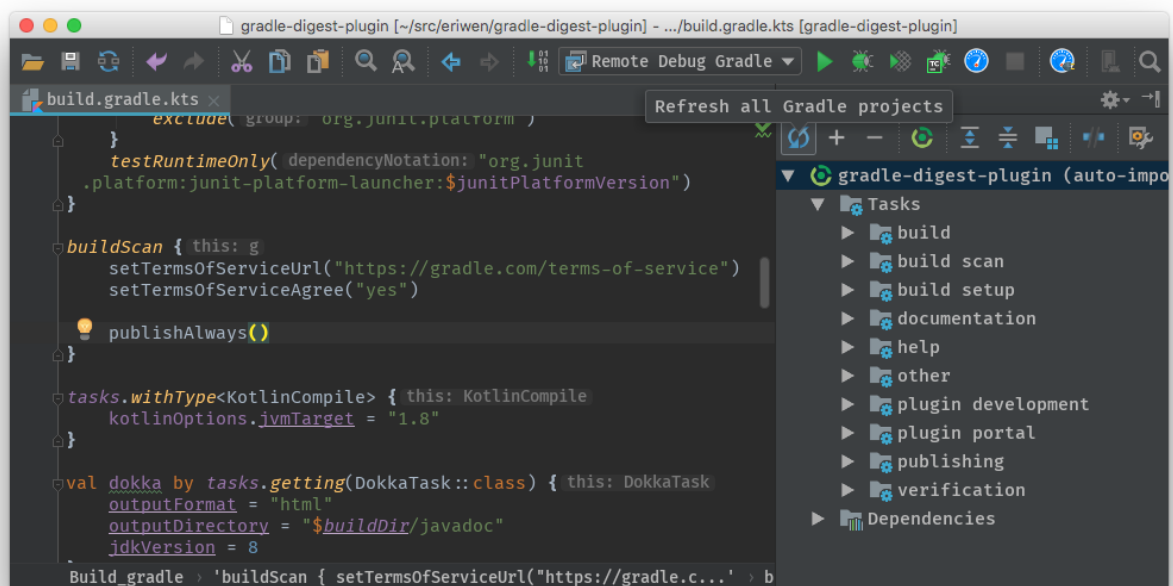


§

### Refreshing Eclipse (using Buildship)

If you're using Buildship for the Eclipse IDE, you can re-synchronize your Gradle build by opening the "Gradle Tasks" view and clicking the "Refresh" icon, or by executing the `Gradle > Refresh Gradle Proj` command from the context menu while editing a Gradle script.

**Figure 8. Refreshing a Gradle project in Eclipse Buildship**

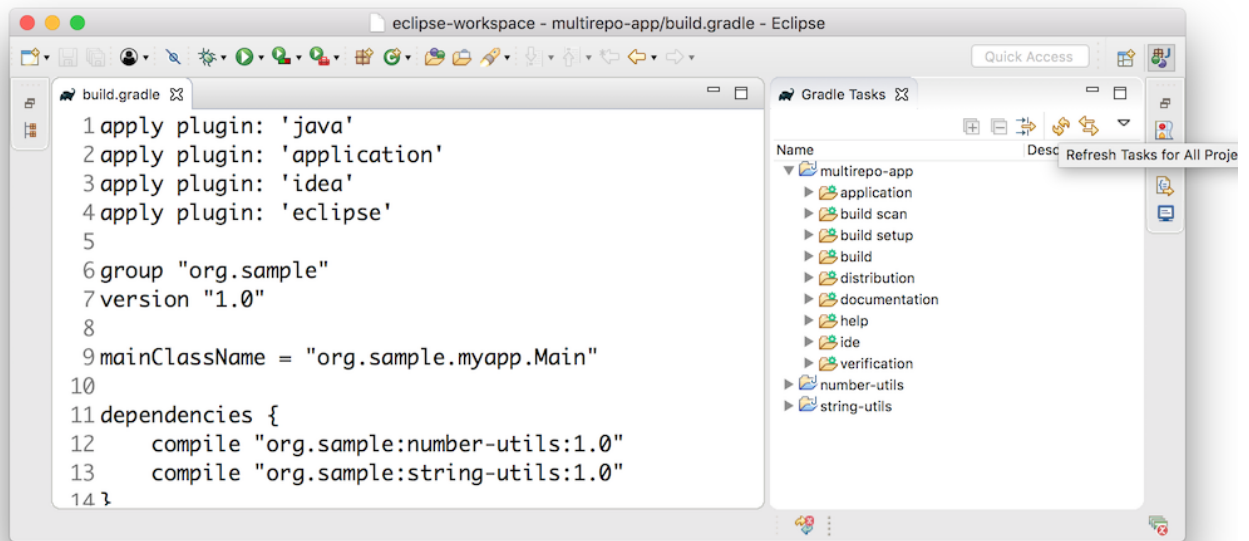

§

## Getting additional help

If you didn't find a fix for your issue here, please reach out to the Gradle community on the help forum or search relevant developer resources using [help.gradle.org](https://help.gradle.org).

If you believe you've found a bug in Gradle, please file an issue on GitHub.

# Embedding Gradle using the Tooling API

## §

### Introduction to the Tooling API

Gradle provides a programmatic API called the Tooling API, which you can use for embedding Gradle into your own software. This API allows you to execute and monitor builds and to query Gradle about the details of a build. The main audience for this API is IDE, CI server, other UI authors; however, the API is open for anyone who needs to embed Gradle in their application.

Gradle TestKit uses the Tooling API for functional testing of your Gradle plugins.

Eclipse Buildship uses the Tooling API for importing your Gradle project and running tasks.

IntelliJ IDEA uses the Tooling API for importing your Gradle project and running tasks.

## §

### Tooling API Features

A fundamental characteristic of the Tooling API is that it operates in a version independent way. This means that you can use the same API to work with builds that use different versions of Gradle, including versions that are newer or older than the version of the Tooling API that you are using. The Tooling API is Gradle wrapper aware and, by default, uses the same Gradle version as that used by the wrapper-powered build.

Some features that the Tooling API provides:

Query the details of a build, including the project hierarchy and the project dependencies, external dependencies (including source and Javadoc jars), source directories and tasks of each project.

Execute a build and listen to stdout and stderr logging and progress messages (e.g. the messages shown in the 'status bar' when you run on the command line).

Execute a specific test class or test method.

Receive interesting events as a build executes, such as project configuration, task execution or test execution.

Cancel a build that is running.

Combine multiple separate Gradle builds into a single composite build.

The Tooling API can download and install the appropriate Gradle version, similar to the wrapper.

The implementation is lightweight, with only a small number of dependencies. It is also a well-behaved library, and makes no assumptions about your classloader structure or logging configuration. This makes the API easy to embed in your application.

§

## Tooling API and the Gradle Build Daemon

The Tooling API always uses the Gradle daemon. This means that subsequent calls to the Tooling API, be it model building requests or task executing requests will be executed in the same long-living process. *The Gradle Daemon* contains more details about the daemon, specifically information on situations when new daemons are forked.

§

## Quickstart

As the Tooling API is an interface for developers, the Javadoc is the main documentation for it. We provide several *samples* that live in `samples/toolingApi` in your Gradle distribution. These samples specify all of the required dependencies for the Tooling API with examples for querying information from Gradle builds and executing tasks from the Tooling API.

To use the Tooling API, add the following repository and dependency declarations to your build script:

### Example 41. Using the tooling API

```
build.gradle
repositories {
    maven { url 'https://repo.gradle.org/gradle/libs-releases' }
}

dependencies {
    compile "org.gradle:gradle-tooling-api:${toolingApiVersion}"
    // The tooling API need an SLF4J implementation available at runtime, replace
    runtime 'org.slf4j:slf4j-simple:1.7.10'
}
```

The main entry point to the Tooling API is the `GradleConnector`. You can navigate from there to find code samples and explore the available Tooling API models. You can use `GradleConnector.connect()` to create a `ProjectConnection`. A `ProjectConnection` connects to a single Gradle project. Using the connection you can execute tasks, tests and retrieve models relative to this project.

§

## Gradle version and Java version compatibility

§

### Provider side

The current version of Tooling API supports running builds using Gradle versions 1.2 and later. However, support for running builds with Gradle versions older than 2.6 is deprecated and will be removed in Tooling API version 5.0.

§

### Consumer side

The current version of Gradle supports running builds via Tooling API versions 2.0 and later. However, support for running builds via Tooling API versions older than 3.0 is deprecated and will be removed in Gradle 5.0.

You should note that not all features of the Tooling API are available for all versions of Gradle. For example, build cancellation is only available when a build uses Gradle 2.1 and later. Refer to the documentation for each class and method for more details.

§

## Java version

The Tooling API requires Java 8 or later. Java 7 is currently still supported but will be removed in Gradle 5.0. The Gradle version used by builds may have additional Java version requirements.

# Build Cache

**Note:** The build cache feature described here is different from the Android plugin build cache.

§

## Overview

The Gradle *build cache* is a cache mechanism that aims to save time by reusing outputs produced by other builds. The build cache works by storing (locally or remotely) build outputs and allowing builds to fetch these outputs from the cache when it is determined that inputs have not changed, avoiding the expensive work of regenerating them.

A first feature using the build cache is *task output caching*. Essentially, task output caching leverages the same intelligence as up-to-date checks that Gradle uses to avoid work when a previous local build has already produced a set of task outputs. But instead of being limited to the previous build in the same workspace, task output caching allows Gradle to reuse task outputs from any earlier build in any location on the local machine. When using a shared build cache for task output caching this even works across developer machines and build agents.

Apart from task output caching, we expect other features to use the build cache in the future.

**Note:** A complete guide is available about using the build cache. It covers the different scenarios caching can improve, and detailed discussions of the different caveats you need to be aware of when enabling caching for a build.

§

## Enable the Build Cache

By default, the build cache is not enabled. You can enable the build cache in a couple of ways:

### Run with `--build-cache` on the command-line

Gradle will use the build cache for this build only.

### Put `org.gradle.caching=true` in your `gradle.properties`

Gradle will try to reuse outputs from previous builds for all builds, unless explicitly disabled with `--no-build-cache`.

When the build cache is enabled, it will store build outputs in the Gradle user home. For configuring this



directory or different kinds of build caches see the section called “Configure the Build Cache”.

§

## Task Output Caching

Beyond incremental builds described in the section called “Up-to-date checks (AKA Incremental Build)”, Gradle can save time by reusing outputs from previous executions of a task by matching inputs to the task. Task outputs can be reused between builds on one computer or even between builds running on different computers via a build cache.

We have focused on the use case where users have an organization-wide remote build cache that is populated regularly by continuous integration builds. Developers and other continuous integration agents should load cache entries from the remote build cache. We expect that developers will not be allowed to populate the remote build cache, and all continuous integration builds populate the build cache after running the `clean` task.

For your build to play well with task output caching it must work well with the incremental build feature. For example, when running your build twice in a row all tasks with outputs should be `UP-TO-DATE`. You cannot expect faster builds or correct builds when enabling task output caching when this prerequisite is not met.

Task output caching is automatically enabled when you enable the build cache, see the section called “Enable the Build Cache”.

§

### What does it look like

Let us start with a project using the Java plugin which has a few Java source files. We run the build the first time.

```
$> gradle --build-cache compileJava
:compileJava
:processResources
:classes
:jar
:assemble

BUILD SUCCESSFUL
```

We see the directory used by the local build cache in the output. Apart from that the build was the same as without the build cache. Let’s clean and run the build again.

```
$> gradle clean
:clean

BUILD SUCCESSFUL
```

```
$> gradle --build-cache assemble
:compileJava FROM-CACHE
:processResources
:classes
:jar
:assemble

BUILD SUCCESSFUL
```

Now we see that, instead of executing the `:compileJava` task, the outputs of the task have been loaded from the build cache. The other tasks have not been loaded from the build cache since they are not cacheable. This is due to `:classes` and `:assemble` being lifecycle tasks and `:processResources` and `:` being Copy-like tasks which are not cacheable since it is generally faster to execute them.

§

## Cacheable tasks

Since a task describes all of its inputs and outputs, Gradle can compute a *build cache key* that uniquely defines the task's outputs based on its inputs. That build cache key is used to request previous outputs from a build cache or store new outputs in the build cache. If the previous build outputs have been already stored in the cache by someone else, e.g. your continuous integration server or other developers, you can avoid executing most tasks locally.

The following inputs contribute to the build cache key for a task in the same way that they do for up-to-date checks:

- The task type and its classpath

- The names of the output properties

- The names and values of properties annotated as described in the section called “Custom task types”

- The names and values of properties added by the DSL via `TaskInputs`

- The classpath of the Gradle distribution, buildSrc and plugins

- The content of the build script when it affects execution of the task

Task types need to opt-in to task output caching using the `@CacheableTask` annotation. Note that `@Cacheable` is not inherited by subclasses. Custom task types are *not* cacheable by default.

§

### Built-in cacheable tasks

Currently, the following built-in Gradle tasks are cacheable:

Java toolchain: `JavaCompile`, `Javadoc`

Groovy toolchain: `GroovyCompile`, `Groovydoc`

Scala toolchain: [ScalaCompile](#), [PlatformScalaCompile](#), [ScalaDoc](#)

Native toolchain: [CppCompile](#), [CCompile](#), [SwiftCompile](#)

Testing: [Test](#)

Code quality tasks: [Checkstyle](#), [CodeNarc](#), [FindBugs](#), [JDepend](#), [Pmd](#)

JaCoCo: [JacocoMerge](#), [JacocoReport](#)

Other tasks: [AntlrTask](#), [ValidateTaskProperties](#), [WriteProperties](#)

All other built-in tasks are currently not cacheable.

Some tasks, like [Copy](#) or [Jar](#), usually do not make sense to make cacheable because Gradle is only copying files from one location to another. It also doesn't make sense to make tasks cacheable that do not produce outputs or have no task actions.

§

### Third party plugins

There are third party plugins that work well with the build cache. The most prominent examples are the Android plugin 3.1+ and the Kotlin plugin 1.2.21+. For other third party plugins, check their documentation to find out whether they support the build cache.

§

### Declaring task inputs and outputs

It is very important that a cacheable task has a complete picture of its inputs and outputs, so that the results from one build can be safely re-used somewhere else.

Missing task inputs can cause incorrect cache hits, where different results are treated as identical because the same cache key is used by both executions. Missing task outputs can cause build failures if Gradle does not completely capture all outputs for a given task. Wrongly declared task inputs can lead to cache misses especially when containing volatile data or absolute paths. (See the section called “Task inputs and outputs” on what should be declared as inputs and outputs.)

**Note:** The task path is *not* an input to the build cache key. This means that tasks with different task paths can re-use each other's outputs as long as Gradle determines that executing them yields the same result.

In order to ensure that the inputs and outputs are properly declared use integration tests (for example using TestKit) to check that a task produces the same outputs for identical inputs and captures all output files for the task. We suggest adding tests to ensure that the task inputs are relocatable, i.e. that the task can be loaded from the cache into a different build directory (see [@PathSensitive](#)).

In order to handle volatile inputs for your tasks consider configuring input normalization.

§

## Configure the Build Cache

You can configure the build cache by using the `Settings.buildCache(org.gradle.api.Action)` block in `settings.gradle`.

Gradle supports a `local` and a `remote` build cache that can be configured separately. When both build caches are enabled, Gradle tries to load build outputs from the local build cache first, and then tries the remote build cache if no build outputs are found. If outputs are found in the remote cache, they are also stored in the local cache, so next time they will be found locally. Gradle stores ("pushes") build outputs in any build cache that is enabled and has `BuildCache.isPush()` set to `true`.

By default, the local build cache has push enabled, and the remote build cache has push disabled.

The local build cache is pre-configured to be a `DirectoryBuildCache` and enabled by default. The remote build cache can be configured by specifying the type of build cache to connect to (`BuildCacheConfiguration.remote(java.lang.Class)`).

§

### Built-in local build cache

The built-in local build cache, `DirectoryBuildCache`, uses a directory to store build cache artifacts. By default, this directory resides in the Gradle user home directory, but its location is configurable.

Gradle will periodically clean-up the local cache directory by removing entries that have not been used recently to conserve disk space.

For more details on the configuration options refer to the DSL documentation of `DirectoryBuildCache`. Here is an example of the configuration.

#### Example 42. Configure the local cache

```
settings.gradle
buildCache {
    local(DirectoryBuildCache) {
        directory = new File(rootDir, 'build-cache')
        removeUnusedEntriesAfterDays = 30
    }
}
```

§

### Remote HTTP build cache

Gradle has built-in support for connecting to a remote build cache backend via HTTP. For more details on what the protocol looks like see `HttpBuildCache`. Note that by using the following configuration the local build cache will be used for storing build outputs while the local and the remote build cache will be used for retrieving build outputs.

### Example 43. Load from HttpBuildCache

#### **settings.gradle**

```
buildCache {
    remote(HttpBuildCache) {
        url = 'https://example.com:8123/cache/'
    }
}
```

You can configure the credentials the [HttpBuildCache](#) uses to access the build cache server as shown in the following example.

### Example 44. Configure remote HTTP cache

#### **settings.gradle**

```
buildCache {
    remote(HttpBuildCache) {
        url = 'http://example.com:8123/cache/'
        credentials {
            username = 'build-cache-user'
            password = 'some-complicated-password'
        }
    }
}
```

**Note:** You may encounter problems with an untrusted SSL certificate when you try to use a build cache backend with an HTTPS URL. The ideal solution is for someone to add a valid SSL certificate to the build cache backend, but we recognize that you may not be able to do that. In that case, set [HttpBuildCache.isAllowUntrustedServer\(\)](#) to `true`:

### Example 45. Allow untrusted SSL certificate for HttpBuildCache

#### **Note: settings.gradle**

```
buildCache {
    remote(HttpBuildCache) {
        url = 'https://example.com:8123/cache/'
        allowUntrustedServer = true
    }
}
```

This is a convenient workaround, but you shouldn't use it as a long-term solution.

§

## Configuration use cases

The recommended use case for the build cache is that your continuous integration server populates the remote build cache from clean builds while developers load from the remote build cache and store in the local build cache. The configuration would then look as follows.

#### Example 46. Recommended setup for CI push use case

##### **settings.gradle**

```
ext.isCiServer = System.getenv().containsKey("CI")

buildCache {
    local {
        enabled = !isCiServer
    }
    remote(HttpBuildCache) {
        url = 'https://example.com:8123/cache/'
        push = isCiServer
    }
}
```

If you use a `buildSrc` directory, you should make sure that it uses the same build cache configuration as the main build. This can be achieved by applying the same script to `buildSrc/settings.gradle` and set as shown in the following example.

#### Example 47. Consistent setup for buildSrc and main build

##### **settings.gradle**

```
apply from: new File(settingsDir, 'gradle/buildCacheSettings.gradle')
```

##### **buildSrc/settings.gradle**

```
apply from: new File(settingsDir, '../gradle/buildCacheSettings.gradle')
```

##### **gradle/buildCacheSettings.gradle**

```
ext.isCiServer = System.getenv().containsKey("CI")

buildCache {
    local {
        enabled = !isCiServer
    }
    remote(HttpBuildCache) {
        url = 'https://example.com:8123/cache/'
        push = isCiServer
    }
}
```

It is also possible to configure the build cache from an init script, which can be used from the command line, added to your Gradle user home or be a part of your custom Gradle distribution.

#### Example 48. Init script to configure the build cache

##### `init.gradle`

```
gradle.settingsEvaluated { settings ->
    settings.buildCache {
        // vvv Your custom configuration goes here
        remote(HttpBuildCache) {
            url = 'https://example.com:8123/cache/'
        }
        // ^^^ Your custom configuration goes here
    }
}
```

§

#### Build cache and composite builds

Gradle's composite build feature allows including other complete Gradle builds into another. Such included builds will inherit the build cache configuration from the top level build, regardless of whether the included builds define build cache configuration themselves or not.

The build cache configuration present for any included build is effectively ignored, in favour of the top level build's configuration. This also applies to any `buildSrc` projects of any included builds.

§

#### How to set up an HTTP build cache backend

Gradle provides a Docker image for a build cache node, which can connect with Gradle Enterprise for centralized management. The cache node can also be used without a Gradle Enterprise installation with restricted functionality.

§

#### Implement your own Build Cache

Using a different build cache backend to store build outputs (which is not covered by the built-in support for connecting to an HTTP backend) requires implementing your own logic for connecting to your custom build cache backend. To this end, custom build cache types can be registered via `BuildCacheConfiguration.registerBuildCacheService(java.lang.Class, java.lang.Class)`.

Gradle Enterprise includes a high-performance, easy to install and operate, shared build cache backend.

# Writing Gradle build scripts



# Build Script Basics

## §

### Projects and tasks

Everything in Gradle sits on top of two basic concepts: *projects* and *tasks*.

Every Gradle build is made up of one or more *projects*. What a project represents depends on what it is that you are doing with Gradle. For example, a project might represent a library JAR or a web application. It might represent a distribution ZIP assembled from the JARs produced by other projects. A project does not necessarily represent a thing to be built. It might represent a thing to be done, such as deploying your application to staging or production environments. Don't worry if this seems a little vague for now. Gradle's build-by-convention support adds a more concrete definition for what a project is.

Each project is made up of one or more *tasks*. A task represents some atomic piece of work which a build performs. This might be compiling some classes, creating a JAR, generating Javadoc, or publishing some archives to a repository.

For now, we will look at defining some simple tasks in a build with one project. Later chapters will look at working with multiple projects and more about working with projects and tasks.

## §

### Hello world

You run a Gradle build using the `gradle` command. The `gradle` command looks for a file called `build.gradle` in the current directory.<sup>[2]</sup> We call this `build.gradle` file a *build script*, although strictly speaking it is a build configuration script, as we will see later. The build script defines a project and its tasks.

To try this out, create the following build script named `build.gradle`.

#### Example 49. Your first build script

```
build.gradle
task hello {
    doLast {
        println 'Hello world!'
    }
}
```

In a command-line shell, move to the containing directory and execute the build script with `gradle -q hello`:

What does `-q` do?

Most of the examples in this user guide are run with the `-q` command-line option. This suppresses Gradle's log messages, so that only the output of the tasks is shown. This keeps the example output in this user guide a little clearer. You don't need to use this option if you don't want to. See *Logging* for more details about the command-line options which affect Gradle's output.

#### Example 50. Execution of a build script

Output of `gradle -q hello`

```
> gradle -q hello
Hello world!
```

What's going on here? This build script defines a single task, called `hello`, and adds an action to it. When you run `gradle hello`, Gradle executes the `hello` task, which in turn executes the action you've provided. The action is simply a closure containing some Groovy code to execute.

If you think this looks similar to Ant's targets, you would be right. Gradle tasks are the equivalent to Ant targets, but as you will see, they are much more powerful. We have used a different terminology than Ant as we think the word *task* is more expressive than the word *target*. Unfortunately this introduces a terminology clash with Ant, as Ant calls its commands, such as `javac` or `copy`, tasks. So when we talk about tasks, we *always* mean Gradle tasks, which are the equivalent to Ant's targets. If we talk about Ant tasks (Ant commands), we explicitly say *Ant task*.

§

## A shortcut task definition

**Note:** This functionality is deprecated and will be removed in Gradle 5.0 without replacement. Use the methods `Task.doFirst(org.gradle.api.Action)` and `Task.doLast(org.gradle.api.Action)` to define an action instead, as demonstrated by the rest of the examples in this chapter.

There is a shorthand way to define a task like our `hello` task above, which is more concise.

#### Example 51. A task definition shortcut

**build.gradle**

```
task hello << {
    println 'Hello world!'
}
```

Again, this defines a task called `hello` with a single closure to execute. The `<<` operator is simply an alias for `doLast`.

§

## Build scripts are code

Gradle's build scripts give you the full power of Groovy. As an appetizer, have a look at this:

### Example 52. Using Groovy in Gradle's tasks

**build.gradle**

```
task upper {
    doLast {
        String someString = 'mY_nAmE'
        println "Original: " + someString
        println "Upper case: " + someString.toUpperCase()
    }
}
```

Output of **gradle -q upper**

```
> gradle -q upper
Original: mY_nAmE
Upper case: MY_NAME
```

or

### Example 53. Using Groovy in Gradle's tasks

**build.gradle**

```
task count {
    doLast {
        4.times { print "$it " }
    }
}
```

Output of **gradle -q count**

```
> gradle -q count
0 1 2 3
```

§

## Task dependencies

As you probably have guessed, you can declare tasks that depend on other tasks.

#### Example 54. Declaration of task that depends on other task

##### build.gradle

```
task hello {
    doLast {
        println 'Hello world!'
    }
}
task intro(dependsOn: hello) {
    doLast {
        println "I'm Gradle"
    }
}
```

##### Output of `gradle -q intro`

```
> gradle -q intro
Hello world!
I'm Gradle
```

To add a dependency, the corresponding task does not need to exist.

#### Example 55. Lazy dependsOn - the other task does not exist (yet)

##### build.gradle

```
task taskX(dependsOn: 'taskY') {
    doLast {
        println 'taskX'
    }
}
task taskY {
    doLast {
        println 'taskY'
    }
}
```

##### Output of `gradle -q taskX`

```
> gradle -q taskX
taskY
taskX
```

The dependency of `taskX` to `taskY` is declared before `taskY` is defined. This is very important for multi-project builds. Task dependencies are discussed in more detail in the section called “Adding dependencies to a task”.

Please notice that you can't use shortcut notation (see the section called “Shortcut notations”) when referring to a task that is not yet defined.

§

## Dynamic tasks

The power of Groovy can be used for more than defining what a task does. For example, you can also use it to dynamically create tasks.

### Example 56. Dynamic creation of a task

**build.gradle**

```
4.times { counter ->
    task "task$counter" {
        doLast {
            println "I'm task number $counter"
        }
    }
}
```

Output of **gradle -q task1**

```
> gradle -q task1
I'm task number 1
```

§

## Manipulating existing tasks

Once tasks are created they can be accessed via an *API*. For instance, you could use this to dynamically add dependencies to a task, at runtime. Ant doesn't allow anything like this.

### Example 57. Accessing a task via API - adding a dependency

**build.gradle**

```
4.times { counter ->
    task "task$counter" {
        doLast {
            println "I'm task number $counter"
        }
    }
}
task0.dependsOn task2, task3
```

Output of **gradle -q task0**

```
> gradle -q task0
I'm task number 2
I'm task number 3
I'm task number 0
```

Or you can add behavior to an existing task.

### Example 58. Accessing a task via API - adding behaviour

#### build.gradle

```
task hello {
    doLast {
        println 'Hello Earth'
    }
}
hello.doFirst {
    println 'Hello Venus'
}
hello.doLast {
    println 'Hello Mars'
}
hello {
    doLast {
        println 'Hello Jupiter'
    }
}
```

#### Output of `gradle -q hello`

```
> gradle -q hello
Hello Venus
Hello Earth
Hello Mars
Hello Jupiter
```

The calls `doFirst` and `doLast` can be executed multiple times. They add an action to the beginning or the end of the task's actions list. When the task executes, the actions in the action list are executed in order.

## §

### Shortcut notations

There is a convenient notation for accessing an *existing* task. Each task is available as a property of the build script:

### Example 59. Accessing task as a property of the build script

#### build.gradle

```
task hello {
    doLast {
        println 'Hello world!'
    }
}
hello.doLast {
    println "Greetings from the $hello.name task."
}
```

#### Output of `gradle -q hello`

```
> gradle -q hello
Hello world!
Greetings from the hello task.
```

This enables very readable code, especially when using the tasks provided by the plugins, like the `compile` task.

## §

### Extra task properties

You can add your own properties to a task. To add a property named `myProperty`, set `ext.myProperty` to an initial value. From that point on, the property can be read and set like a predefined task property.

### Example 60. Adding extra properties to a task

#### build.gradle

```
task myTask {
    ext.myProperty = "myValue"
}

task printTaskProperties {
    doLast {
        println myTask.myProperty
    }
}
```

#### Output of `gradle -q printTaskProperties`

```
> gradle -q printTaskProperties
myValue
```

Extra properties aren't limited to tasks. You can read more about them in the section called "Extra properties".

§

## Using Ant Tasks

Ant tasks are first-class citizens in Gradle. Gradle provides excellent integration for Ant tasks by simply relying on Groovy. Groovy is shipped with the fantastic `AntBuilder`. Using Ant tasks from Gradle is as convenient and more powerful than using Ant tasks from a `build.xml` file. From the example below, you can learn how to execute Ant tasks and how to access Ant properties:

### Example 61. Using `AntBuilder` to execute `ant.loadfile` target

#### `build.gradle`

```
task loadfile {
    doLast {
        def files = file('../antLoadfileResources').listFiles().sort()
        files.each { File file ->
            if (file.isFile()) {
                ant.loadfile(srcFile: file, property: file.name)
                println " *** $file.name ***"
                println "${ant.properties[file.name]}"
            }
        }
    }
}
```

#### Output of `gradle -q loadfile`

```
> gradle -q loadfile
*** agile.manifesto.txt ***
Individuals and interactions over processes and tools
Working software over comprehensive documentation
Customer collaboration over contract negotiation
Responding to change over following a plan
*** gradle.manifesto.txt ***
Make the impossible possible, make the possible easy and make the easy elegant.
(inspired by Moshe Feldenkrais)
```

There is lots more you can do with Ant in your build scripts. You can find out more in *Using Ant from Gradle*.

§

## Using methods

Gradle scales in how you can organize your build logic. The first level of organizing your build logic for the example above, is extracting a method.



## Example 62. Using methods to organize your build logic

### build.gradle

```
task checksum {
    doLast {
        fileList('../antLoadfileResources').each { File file ->
            ant.checksum(file: file, property: "cs_${file.name}")
            println "${file.name} Checksum: ${ant.properties["cs_${file.name}"]}"
        }
    }
}

task loadfile {
    doLast {
        fileList('../antLoadfileResources').each { File file ->
            ant.loadfile(srcFile: file, property: file.name)
            println "I'm fond of ${file.name}"
        }
    }
}

File[] fileList(String dir) {
    file(dir).listFiles({file -> file.isFile() } as FileFilter).sort()
}
```

### Output of `gradle -q loadfile`

```
> gradle -q loadfile
I'm fond of agile.manifesto.txt
I'm fond of gradle.manifesto.txt
```

Later you will see that such methods can be shared among subprojects in multi-project builds. If your build logic becomes more complex, Gradle offers you other very convenient ways to organize it. We have devoted a whole chapter to this. See *Organizing Gradle Projects*.

## §

### Default tasks

Gradle allows you to define one or more default tasks that are executed if no other tasks are specified.

### Example 63. Defining a default task

#### build.gradle

```
defaultTasks 'clean', 'run'

task clean {
    doLast {
        println 'Default Cleaning!'
    }
}

task run {
    doLast {
        println 'Default Running!'
    }
}

task other {
    doLast {
        println "I'm not a default task!"
    }
}
```

#### Output of `gradle -q`

```
> gradle -q
Default Cleaning!
Default Running!
```

This is equivalent to running `gradle clean run`. In a multi-project build every subproject can have its own specific default tasks. If a subproject does not specify default tasks, the default tasks of the parent project are used (if defined).

## §

### Configure by DAG

As we later describe in full detail (see *Build Lifecycle*), Gradle has a configuration phase and an execution phase. After the configuration phase, Gradle knows all tasks that should be executed. Gradle offers you a hook to make use of this information. A use-case for this would be to check if the release task is among the tasks to be executed. Depending on this, you can assign different values to some variables.

In the following example, execution of the `distribution` and `release` tasks results in different value of the `version` variable.

#### Example 64. Different outcomes of build depending on chosen tasks

##### build.gradle

```
task distribution {
    doLast {
        println "We build the zip with version=$version"
    }
}

task release(dependsOn: 'distribution') {
    doLast {
        println 'We release now'
    }
}

gradle.taskGraph.whenReady {taskGraph ->
    if (taskGraph.hasTask(release)) {
        version = '1.0'
    } else {
        version = '1.0-SNAPSHOT'
    }
}
```

##### Output of `gradle -q distribution`

```
> gradle -q distribution
We build the zip with version=1.0-SNAPSHOT
```

##### Output of `gradle -q release`

```
> gradle -q release
We build the zip with version=1.0
We release now
```

The important thing is that `whenReady` affects the release task *before* the release task is executed. This works even when the release task is not the *primary* task (i.e., the task passed to the `gradle` command).

## §

### External dependencies for the build script

If your build script needs to use external libraries, you can add them to the script's classpath in the build script itself. You do this using the `buildscript()` method, passing in a closure which declares the build script classpath.

### Example 65. Declaring external dependencies for the build script

#### build.gradle

```
buildscript {
    repositories {
        mavenCentral()
    }
    dependencies {
        classpath group: 'commons-codec', name: 'commons-codec', version: '1.2'
    }
}
```

The closure passed to the `buildscript()` method configures a [ScriptHandler](#) instance. You declare the build script classpath by adding dependencies to the `classpath` configuration. This is the same way you declare, for example, the Java compilation classpath. You can use any of the dependency types described in *Dependency Types*, except project dependencies.

Having declared the build script classpath, you can use the classes in your build script as you would any other classes on the classpath. The following example adds to the previous example, and uses classes from the build script classpath.

### Example 66. A build script with external dependencies

#### build.gradle

```
import org.apache.commons.codec.binary.Base64

buildscript {
    repositories {
        mavenCentral()
    }
    dependencies {
        classpath group: 'commons-codec', name: 'commons-codec', version: '1.2'
    }
}

task encode {
    doLast {
        def byte[] encodedString = new Base64().encode('hello world\n'.getBytes())
        println new String(encodedString)
    }
}
```

#### Output of `gradle -q encode`

```
> gradle -q encode
aGVsbG8gd29ybGQK
```

For multi-project builds, the dependencies declared with a project's `buildscript()` method are available to the build scripts of all its sub-projects.

Build script dependencies may be Gradle plugins. Please consult *Using Gradle Plugins* for more information on Gradle plugins.

Every project automatically has a `buildEnvironment` task of type `BuildEnvironmentReportTask` that can be invoked to report on the resolution of the build script dependencies.

§

## Where to next?

In this chapter, we have had a first look at tasks. But this is not the end of the story for tasks. If you want to jump into more of the details, have a look at *Authoring Tasks*.

Otherwise, continue on to the tutorials in *Java Quickstart* and *Dependency Management for Java Projects*.

---

[2] There are command line switches to change this behavior. See *Command-Line Interface*)

# Build Init Plugin

**Note:** The Build Init plugin is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The Gradle Build Init plugin can be used to bootstrap the process of creating a new Gradle build. It supports creating brand new projects of different types as well as converting existing builds (e.g. An Apache Maven build) to be Gradle builds.

Gradle plugins typically need to be *applied* to a project before they can be used (see the section called “Using plugins”). The Build Init plugin is an automatically applied plugin, which means you do not need to apply it explicitly. To use the plugin, simply execute the task named `init` where you would like to create the Gradle build. There is no need to create a “stub” `build.gradle` file in order to apply the plugin.

It also leverages the `wrapper` task to generate the Gradle Wrapper files for the project.

§

## Tasks

The plugin adds the following tasks to the project:

**Table 1. Build Init plugin - tasks**

task name	Depends on	Type	Description
<code>init</code>	<code>wrapper</code>	<a href="#">InitBuild</a>	Generates a Gradle project.
<code>wrapper</code>	-	<a href="#">Wrapper</a>	Generates Gradle wrapper files.

§

## What to set up

The `init` supports different build setup *types*. The type is specified by supplying a `--type` argument value. For example, to create a Java library project simply execute: `gradle init --type java-library`.

If a `--type` parameter is not supplied, Gradle will attempt to infer the type from the environment. For example, it will infer a type value of “`pom`” if it finds a `pom.xml` to convert to a Gradle build.

If the type could not be inferred, the type “basic” will be used.

The `init` plugin also supports generating build scripts using either the Gradle Groovy DSL or the Gradle Kotlin DSL. The build script DSL to use defaults to the Groovy DSL and is specified by supplying a `--dsl` argument value. For example, to create a Java library project with Kotlin DSL build scripts simply execute: `gr`

All build setup types include the setup of the Gradle Wrapper.

Note that the migration from Maven builds only supports the Groovy DSL for generated build scripts.

§

## Build init types

**Note:** As this plugin is currently incubating, only a few build init types are currently supported. More types will be added in future Gradle releases.

§

### “pom” (Maven conversion)

The “pom” type can be used to convert an Apache Maven build to a Gradle build. This works by converting the POM to one or more Gradle files. It is only able to be used if there is a valid “pom.xml” file in the directory that the `init` task is invoked in or, if invoked via the “-p” command line option, in the specified project directory. This “pom” type will be automatically inferred if such a file exists.

The Maven conversion implementation was inspired by the `maven2gradle` tool that was originally developed by Gradle community members.

The conversion process has the following features:

Uses effective POM and effective settings (support for POM inheritance, dependency management, properties)

Supports both single module and multimodule projects

Supports custom module names (that differ from directory names)

Generates general metadata - id, description and version

Applies maven, java and war plugins (as needed)

Supports packaging war projects as jars if needed

Generates dependencies (both external and inter-module)

Generates download repositories (inc. local Maven repository)

Adjusts Java compiler settings

Supports packaging of sources and tests

Supports TestNG runner

Generates global exclusions from Maven enforcer plugin settings

§

`“java-application”`

The `“java-application”` build init type is not inferable. It must be explicitly specified.

It has the following features:

Uses the `“application”` plugin to produce a command-line application implemented using Java

Uses the `“jcenter”` dependency repository

Uses JUnit for testing

Has directories in the conventional locations for source code

Contains a sample class and unit test, if there are no existing source or test files

Alternative test framework can be specified by supplying a `--test-framework` argument value. To use a different test framework, execute one of the following commands:

```
gradle init --type java-application --test-framework spock: Uses Spock for testing instead of JUnit
```

```
gradle init --type java-application --test-framework testng: Uses TestNG for testing instead of JUnit
```

§

`“java-library”`

The `“java-library”` build init type is not inferable. It must be explicitly specified.

It has the following features:

Uses the `“java”` plugin to produce a library Jar

Uses the `“jcenter”` dependency repository

Uses JUnit for testing

Has directories in the conventional locations for source code

Contains a sample class and unit test, if there are no existing source or test files

Alternative test framework can be specified by supplying a `--test-framework` argument value. To use a



different test framework, execute one of the following commands:

```
gradle init --type java-library --test-framework spock: Uses Spock for testing instead of JUnit
```

```
gradle init --type java-library --test-framework testng: Uses TestNG for testing instead of JUnit
```

§

`"scala-library"`

The `"scala-library"` build init type is not inferable. It must be explicitly specified.

It has the following features:

Uses the `"scala"` plugin to produce a library Jar

Uses the `"jcenter"` dependency repository

Uses Scala 2.10

Uses ScalaTest for testing

Has directories in the conventional locations for source code

Contains a sample scala class and an associated ScalaTest test suite, if there are no existing source or test files

Uses the Zinc Scala compiler by default

§

`"groovy-library"`

The `"groovy-library"` build init type is not inferable. It must be explicitly specified.

It has the following features:

Uses the `"groovy"` plugin to produce a library Jar

Uses the `"jcenter"` dependency repository

Uses Groovy 2.x

Uses Spock testing framework for testing

Has directories in the conventional locations for source code

Contains a sample Groovy class and an associated Spock specification, if there are no existing source or test files

§

`“groovy-application”`

The `“groovy-application”` build init type is not inferable. It must be explicitly specified.

It has the following features:

Uses the `“groovy”` plugin

Uses the `“application”` plugin to produce a command-line application implemented using Groovy

Uses the `“jcenter”` dependency repository

Uses Groovy 2.x

Uses Spock testing framework for testing

Has directories in the conventional locations for source code

Contains a sample Groovy class and an associated Spock specification, if there are no existing source or test files

§

`“basic”`

The `“basic”` build init type is useful for creating a fresh new Gradle project. It creates a sample `build.gradle` file, with comments and links to help get started.

This type is used when no type was explicitly specified, and no type could be inferred.

# Writing Build Scripts

This chapter looks at some of the details of writing a build script.

§

## The Gradle build language

Gradle provides a *domain specific language*, or DSL, for describing builds. This build language is based on Groovy, with some additions to make it easier to describe a build.

A build script can contain any Groovy language element.<sup>[3]</sup> Gradle assumes that each build script is encoded using UTF-8.

§

## The Project API

In the tutorial in *Java Quickstart* we used, for example, the `apply()` method. Where does this method come from? We said earlier that the build script defines a project in Gradle. For each project in the build, Gradle creates an object of type `Project` and associates this `Project` object with the build script. As the build script executes, it configures this `Project` object:

### Getting help writing build scripts

Don't forget that your build script is simply Groovy code that drives the Gradle API. And the `Project` interface is your starting point for accessing everything in the Gradle API. So, if you're wondering what 'tags' are available in your build script, you can start with the documentation for the `Project` interface.

Any method you call in your build script which *is not defined* in the build script, is delegated to the `Project` object.

Any property you access in your build script, which *is not defined* in the build script, is delegated to the `Project` object.

Let's try this out and try to access the `name` property of the `Project` object.

### Example 67. Accessing property of the Project object

#### build.gradle

```
println name
println project.name
```

#### Output of `gradle -q check`

```
> gradle -q check
projectApi
projectApi
```

Both `println` statements print out the same property. The first uses auto-delegation to the `Project` object, for properties not defined in the build script. The other statement uses the `project` property available to any build script, which returns the associated `Project` object. Only if you define a property or a method which has the same name as a member of the `Project` object, would you need to use the `project` property.

§

### Standard project properties

The `Project` object provides some standard properties, which are available in your build script. The following table lists a few of the commonly used ones.

**Table 2. Project Properties**

name	Type	Default Value
<code>project</code>	<code>Project</code>	The <code>Project</code> instance
<code>name</code>	<code>String</code>	The name of the project directory.
<code>path</code>	<code>String</code>	The absolute path of the project.
<code>description</code>	<code>String</code>	A description for the project.
<code>projectDir</code>	<code>File</code>	The directory containing the build script.
<code>buildDir</code>	<code>File</code>	<code>projectDir/build</code>
<code>group</code>	<code>Object</code>	unspecified
<code>version</code>	<code>Object</code>	unspecified
<code>ant</code>	<code>AntBuilder</code>	An <code>AntBuilder</code> instance

§

## The Script API

When Gradle executes a script, it compiles the script into a class which implements `Script`. This means that all of the properties and methods declared by the `Script` interface are available in your script.

§

## Declaring variables

There are two kinds of variables that can be declared in a build script: local variables and extra properties.

§

### Local variables

Local variables are declared with the `def` keyword. They are only visible in the scope where they have been declared. Local variables are a feature of the underlying Groovy language.

#### Example 68. Using local variables

```
build.gradle
def dest = "dest"

task copy(type: Copy) {
    from "source"
    into dest
}
```

§

### Extra properties

All enhanced objects in Gradle's domain model can hold extra user-defined properties. This includes, but is not limited to, projects, tasks, and source sets. Extra properties can be added, read and set via the owning object's `ext` property. Alternatively, an `ext` block can be used to add multiple properties at once.

### Example 69. Using extra properties

#### build.gradle

```
apply plugin: "java"

ext {
    springVersion = "3.1.0.RELEASE"
    emailNotification = "build@master.org"
}

sourceSets.all { ext.purpose = null }

sourceSets {
    main {
        purpose = "production"
    }
    test {
        purpose = "test"
    }
    plugin {
        purpose = "production"
    }
}

task printProperties {
    doLast {
        println springVersion
        println emailNotification
        sourceSets.matching { it.purpose == "production" }.each { println it.name }
    }
}
```

#### Output of `gradle -q printProperties`

```
> gradle -q printProperties
3.1.0.RELEASE
build@master.org
main
plugin
```

In this example, an `ext` block adds two extra properties to the `project` object. Additionally, a property named `purpose` is added to each source set by setting `ext.purpose` to `null` (`null` is a permissible value). Once the properties have been added, they can be read and set like predefined properties.

By requiring special syntax for adding a property, Gradle can fail fast when an attempt is made to set a (predefined or extra) property but the property is misspelled or does not exist. Extra properties can be accessed from anywhere their owning object can be accessed, giving them a wider scope than local variables. Extra properties on a project are visible from its subprojects.

For further details on extra properties and their API, see the [ExtraPropertiesExtension](#) class in the

API documentation.

§

## Configuring arbitrary objects

You can configure arbitrary objects in the following very readable way.

### Example 70. Configuring arbitrary objects

#### **build.gradle**

```
task configure {
    doLast {
        def pos = configure(new java.text.FieldPosition(10)) {
            beginIndex = 1
            endIndex = 5
        }
        println pos.beginIndex
        println pos.endIndex
    }
}
```

#### Output of **gradle -q configure**

```
> gradle -q configure
1
5
```

§

## Configuring arbitrary objects using an external script

You can also configure arbitrary objects using an external script.

### Example 71. Configuring arbitrary objects using a script

#### build.gradle

```
task configure {
    doLast {
        def pos = new java.text.FieldPosition(10)
        // Apply the script
        apply from: 'other.gradle', to: pos
        println pos.beginIndex
        println pos.endIndex
    }
}
```

#### other.gradle

```
// Set properties.
beginIndex = 1
endIndex = 5
```

#### Output of `gradle -q configure`

```
> gradle -q configure
1
5
```

## §

### Some Groovy basics

The Groovy language provides plenty of features for creating DSLs, and the Gradle build language takes advantage of these. Understanding how the build language works will help you when you write your build script, and in particular, when you start to write custom plugins and tasks.

## §

### Groovy JDK

Groovy adds lots of useful methods to the standard Java classes. For example, `Iterable` gets an `each` method, which iterates over the elements of the `Iterable`:

### Example 72. Groovy JDK methods

#### build.gradle

```
// Iterable gets an each() method
configurations.runtime.each { File f -> println f }
```

Have a look at <http://groovy-lang.org/gdk.html> for more details.



§

## Property accessors

Groovy automatically converts a property reference into a call to the appropriate getter or setter method.

### Example 73. Property accessors

**build.gradle**

```
// Using a getter method
println project.buildDir
println getProject().getBuildDir()

// Using a setter method
project.buildDir = 'target'
getProject().setBuildDir('target')
```

§

## Optional parentheses on method calls

Parentheses are optional for method calls.

### Example 74. Method call without parentheses

**build.gradle**

```
test.systemProperty 'some.prop', 'value'
test.systemProperty('some.prop', 'value')
```

§

## List and map literals

Groovy provides some shortcuts for defining `List` and `Map` instances. Both kinds of literals are straightforward, but map literals have some interesting twists.

For instance, the “`apply`” method (where you typically apply plugins) actually takes a map parameter. However, when you have a line like “`apply plugin: 'java'`”, you aren’t actually using a map literal, you’re actually using “named parameters”, which have almost exactly the same syntax as a map literal (without the wrapping brackets). That named parameter list gets converted to a map when the method is called, but it doesn’t start out as a map.

### Example 75. List and map literals

#### build.gradle

```
// List literal
test.includes = ['org/gradle/api/**', 'org/gradle/internal/**']

List<String> list = new ArrayList<String>()
list.add('org/gradle/api/**')
list.add('org/gradle/internal/**')
test.includes = list

// Map literal.
Map<String, String> map = [key1:'value1', key2: 'value2']

// Groovy will coerce named arguments
// into a single map argument
apply plugin: 'java'
```

§

#### Closures as the last parameter in a method

The Gradle DSL uses closures in many places. You can find out more about closures here. When the last parameter of a method is a closure, you can place the closure after the method call:

### Example 76. Closure as method parameter

#### build.gradle

```
repositories {
    println "in a closure"
}
repositories() { println "in a closure" }
repositories({ println "in a closure" })
```

§

#### Closure delegate

Each closure has a `delegate` object, which Groovy uses to look up variable and method references which are not local variables or parameters of the closure. Gradle uses this for *configuration closures*, where the `delegate` object is set to the object to be configured.

## Example 77. Closure delegates

### build.gradle

```
dependencies {  
    assert delegate == project.dependencies  
    testCompile('junit:junit:4.12')  
    delegate.testCompile('junit:junit:4.12')  
}
```

## §

## Default imports

To make build scripts more concise, Gradle automatically adds a set of import statements to the Gradle scripts. This means that instead of using `throw new org.gradle.api.tasks.StopExecutionException()` you can just type `throw new StopExecutionException()` instead.

Listed below are the imports added to each script:

### Gradle default imports.

```
import org.gradle.*  
import org.gradle.api.*  
import org.gradle.api.artifacts.*  
import org.gradle.api.artifacts.component.*  
import org.gradle.api.artifacts.dsl.*  
import org.gradle.api.artifacts.ivy.*  
import org.gradle.api.artifacts.maven.*  
import org.gradle.api.artifacts.query.*  
import org.gradle.api.artifacts.repositories.*  
import org.gradle.api.artifacts.result.*  
import org.gradle.api.artifacts.transform.*  
import org.gradle.api.artifacts.type.*  
import org.gradle.api.attributes.*  
import org.gradle.api.capabilities.*  
import org.gradle.api.component.*  
import org.gradle.api.credentials.*  
import org.gradle.api.distribution.*  
import org.gradle.api.distribution.plugins.*  
import org.gradle.api.dsl.*  
import org.gradle.api.execution.*  
import org.gradle.api.file.*  
import org.gradle.api.initialization.*  
import org.gradle.api.initialization.definition.*  
import org.gradle.api.initialization.dsl.*  
import org.gradle.api.invocation.*  
import org.gradle.api.java.archives.*  
import org.gradle.api.logging.*
```

```
import org.gradle.api.logging.configuration.*
import org.gradle.api.model.*
import org.gradle.api.plugins.*
import org.gradle.api.plugins.announce.*
import org.gradle.api.pluginsantlr.*
import org.gradle.api.plugins.buildcomparison.gradle.*
import org.gradle.api.plugins.osgi.*
import org.gradle.api.plugins.quality.*
import org.gradle.api.plugins.scala.*
import org.gradle.api.provider.*
import org.gradle.api.publish.*
import org.gradle.api.publish.ivy.*
import org.gradle.api.publish.ivy.plugins.*
import org.gradle.api.publish.ivy.tasks.*
import org.gradle.api.publish.maven.*
import org.gradle.api.publish.maven.plugins.*
import org.gradle.api.publish.maven.tasks.*
import org.gradle.api.publish.plugins.*
import org.gradle.api.publish.tasks.*
import org.gradle.api.reflect.*
import org.gradle.api.reporting.*
import org.gradle.api.reporting.components.*
import org.gradle.api.reporting.dependencies.*
import org.gradle.api.reporting.dependents.*
import org.gradle.api.reporting.model.*
import org.gradle.api.reporting.plugins.*
import org.gradle.api.resources.*
import org.gradle.api.specs.*
import org.gradle.api.tasks.*
import org.gradle.api.tasks.ant.*
import org.gradle.api.tasks.application.*
import org.gradle.api.tasks.bundling.*
import org.gradle.api.tasks.compile.*
import org.gradle.api.tasks.diagnostics.*
import org.gradle.api.tasks.incremental.*
import org.gradle.api.tasks.javadoc.*
import org.gradle.api.tasks.options.*
import org.gradle.api.tasks.scala.*
import org.gradle.api.tasks.testing.*
import org.gradle.api.tasks.testing.junit.*
import org.gradle.api.tasks.testing.junitplatform.*
import org.gradle.api.tasks.testing.testng.*
import org.gradle.api.tasks.util.*
import org.gradle.api.tasks.wrapper.*
import org.gradle.authentication.*
import org.gradle.authentication.aws.*
import org.gradle.authentication.http.*
import org.gradle.buildinit.plugins.*
import org.gradle.buildinit.tasks.*
```

```
import org.gradle.caching.*
import org.gradle.caching.configuration.*
import org.gradle.caching.http.*
import org.gradle.caching.local.*
import org.gradle.concurrent.*
import org.gradle.external.javadoc.*
import org.gradle.ide.visualstudio.*
import org.gradle.ide.visualstudio.plugins.*
import org.gradle.ide.visualstudio.tasks.*
import org.gradle.ide.xcode.*
import org.gradle.ide.xcode.plugins.*
import org.gradle.ide.xcode.tasks.*
import org.gradle.ivy.*
import org.gradle.jvm.*
import org.gradle.jvm.application.scripts.*
import org.gradle.jvm.application.tasks.*
import org.gradle.jvm.platform.*
import org.gradle.jvm.plugins.*
import org.gradle.jvm.tasks.*
import org.gradle.jvm.tasks.api.*
import org.gradle.jvm.test.*
import org.gradle.jvm.toolchain.*
import org.gradle.language.*
import org.gradle.language.assembler.*
import org.gradle.language.assembler.plugins.*
import org.gradle.language.assembler.tasks.*
import org.gradle.language.base.*
import org.gradle.language.base.artifact.*
import org.gradle.language.base.compile.*
import org.gradle.language.base.plugins.*
import org.gradle.language.base.sources.*
import org.gradle.language.c.*
import org.gradle.language.c.plugins.*
import org.gradle.language.c.tasks.*
import org.gradle.language coffeescript.*
import org.gradle.language.cpp.*
import org.gradle.language.cpp.plugins.*
import org.gradle.language.cpp.tasks.*
import org.gradle.language.java.*
import org.gradle.language.java.artifact.*
import org.gradle.language.java.plugins.*
import org.gradle.language.java.tasks.*
import org.gradle.language.javascript.*
import org.gradle.language.jvm.*
import org.gradle.language.jvm.plugins.*
import org.gradle.language.jvm.tasks.*
import org.gradle.language.nativeplatform.*
import org.gradle.language.nativeplatform.tasks.*
import org.gradle.language.objectivec.*
```

```
import org.gradle.language.objectivec.plugins.*
import org.gradle.language.objectivec.tasks.*
import org.gradle.language.objectivecplugin.*
import org.gradle.language.objectivecplugin.plugins.*
import org.gradle.language.objectivecplugin.tasks.*
import org.gradle.language.plugins.*
import org.gradle.language.rc.*
import org.gradle.language.rc.plugins.*
import org.gradle.language.rc.tasks.*
import org.gradle.language.routes.*
import org.gradle.language.scala.*
import org.gradle.language.scala.plugins.*
import org.gradle.language.scala.tasks.*
import org.gradle.language.scala.toolchain.*
import org.gradle.language.swift.*
import org.gradle.language.swift.plugins.*
import org.gradle.language.swift.tasks.*
import org.gradle.language.twirl.*
import org.gradle.maven.*
import org.gradle.model.*
import org.gradle.nativeplatform.*
import org.gradle.nativeplatform.platform.*
import org.gradle.nativeplatform.plugins.*
import org.gradle.nativeplatform.tasks.*
import org.gradle.nativeplatform.test.*
import org.gradle.nativeplatform.test.cpp.*
import org.gradle.nativeplatform.test.cpp.plugins.*
import org.gradle.nativeplatform.test.cunit.*
import org.gradle.nativeplatform.test.cunit.plugins.*
import org.gradle.nativeplatform.test.cunit.tasks.*
import org.gradle.nativeplatform.test.googletest.*
import org.gradle.nativeplatform.test.googletest.plugins.*
import org.gradle.nativeplatform.test.plugins.*
import org.gradle.nativeplatform.test.tasks.*
import org.gradle.nativeplatform.test.xctest.*
import org.gradle.nativeplatform.test.xctest.plugins.*
import org.gradle.nativeplatform.test.xctest.tasks.*
import org.gradle.nativeplatform.toolchain.*
import org.gradle.nativeplatform.toolchain.plugins.*
import org.gradle.normalization.*
import org.gradle.platform.base.*
import org.gradle.platform.base.binary.*
import org.gradle.platform.base.component.*
import org.gradle.platform.base.plugins.*
import org.gradle.play.*
import org.gradle.play.distribution.*
import org.gradle.play.platform.*
import org.gradle.play.plugins.*
import org.gradle.play.plugins.ide.*
```

```
import org.gradle.play.tasks.*
import org.gradle.play.toolchain.*
import org.gradle.plugin.devel.*
import org.gradle.plugin.devel.plugins.*
import org.gradle.plugin.devel.tasks.*
import org.gradle.plugin.management.*
import org.gradle.plugin.use.*
import org.gradle.plugins.ear.*
import org.gradle.plugins.ear.descriptor.*
import org.gradle.plugins.ide.*
import org.gradle.plugins.ide.api.*
import org.gradle.plugins.ide.eclipse.*
import org.gradle.plugins.ide.idea.*
import org.gradle.plugins.javascript.base.*
import org.gradle.plugins.javascript.coffeescript.*
import org.gradle.plugins.javascript.envjs.*
import org.gradle.plugins.javascript.envjs.browser.*
import org.gradle.plugins.javascript.envjs.http.*
import org.gradle.plugins.javascript.envjs.http.simple.*
import org.gradle.plugins.javascript.jshint.*
import org.gradle.plugins.javascript.rhino.*
import org.gradle.plugins.signing.*
import org.gradle.plugins.signing.signatory.*
import org.gradle.plugins.signing.signatory.pgp.*
import org.gradle.plugins.signing.type.*
import org.gradle.plugins.signing.type.pgp.*
import org.gradle.process.*
import org.gradle.swiftpm.*
import org.gradle.swiftpm.plugins.*
import org.gradle.swiftpm.tasks.*
import org.gradle.testing.base.*
import org.gradle.testing.base.plugins.*
import org.gradle.testing.jacoco.plugins.*
import org.gradle.testing.jacoco.tasks.*
import org.gradle.testing.jacoco.tasks.rules.*
import org.gradle.testkit.runner.*
```

```
import org.gradle.vcs.*  
import org.gradle.vcs.git.*  
import org.gradle.workers.*
```

---

[3] Any language element except for statement labels.



# Authoring Tasks

In the introductory tutorial (*Build Script Basics*) you learned how to create simple tasks. You also learned how to add additional behavior to these tasks later on, and you learned how to create dependencies between tasks. This was all about simple tasks, but Gradle takes the concept of tasks further. Gradle supports *enhanced tasks*, which are tasks that have their own properties and methods. This is really different from what you are used to with Ant targets. Such enhanced tasks are either provided by you or built into Gradle.

## §

### Task outcomes

When Gradle executes a task, it can label the task with different outcomes in the console UI and via the Tooling API (see *Embedding Gradle using the Tooling API*). These labels are based on if a task has actions to execute, if it should execute those actions, if it did execute those actions and if those actions made any changes.

**Table 3. Details about task outcomes**

outcome label	Description of outcome	Situations that have this outcome
<code>no label</code> <code>EXECUTED</code>	Task executed its actions.	<ul style="list-style-type: none"> <li>Used whenever a task has actions and Gradle has determined they should be executed as part of a build.</li> <li>Used whenever a task has no actions and some dependencies, and any of the dependencies are executed. See also the section called “Lifecycle tasks”.</li> </ul>
<code>UP-TO-DATE</code>	Task’s outputs did not change.	<ul style="list-style-type: none"> <li>Used when a task has outputs and inputs and they have not changed. See the section called “Up-to-date checks (AKA Incremental Build)”.</li> <li>Used when a task has actions, but the task tells Gradle it did not change its outputs.</li> <li>Used when a task has no actions and some dependencies, but all of the dependencies are up-to-date, skipped or from cache. See also the section called “Lifecycle tasks”.</li> <li>Used when a task has no actions and no dependencies.</li> </ul>
<code>FROM-CACHE</code>	Task’s outputs could be found from a previous execution.	Used when a task has outputs restored from the build cache. See <i>Build Cache</i> .
<code>SKIPPED</code>	Task did not execute its actions.	<ul style="list-style-type: none"> <li>Used when a task has been explicitly excluded from the command-line. See the section called “Excluding tasks from execution”.</li> <li>Used when a task has an <code>onlyIf</code> predicate return false. See the section called “Using a predicate”.</li> </ul>
<code>NO-SOURCE</code>	Task did not need to execute its actions.	Used when a task has inputs and outputs, but no sources. For example, source files are <code>.java</code> files for <code>JavaCompile</code> .

## §

### Defining tasks

We have already seen how to define tasks using a keyword style in *Build Script Basics*. There are a few variations on this style, which you may need to use in certain situations. For example, the keyword style does not work in expressions.

### Example 78. Defining tasks

#### build.gradle

```
task(hello) {
    doLast {
        println "hello"
    }
}

task(copy, type: Copy) {
    from(file('srcDir'))
    into(buildDir)
}
```

You can also use strings for the task names:

### Example 79. Defining tasks - using strings for task names

#### build.gradle

```
task('hello') {
    doLast {
        println "hello"
    }
}

task('copy', type: Copy) {
    from(file('srcDir'))
    into(buildDir)
}
```

There is an alternative syntax for defining tasks, which you may prefer to use:

### Example 80. Defining tasks with alternative syntax

#### build.gradle

```
tasks.create('hello') {
    doLast {
        println "hello"
    }
}

tasks.create('copy', Copy) {
    from(file('srcDir'))
    into(buildDir)
}
```

Here we add tasks to the `tasks` collection. Have a look at [TaskContainer](#) for more variations of the `create` method.

## §

### Locating tasks

You often need to locate the tasks that you have defined in the build file, for example, to configure them or use them for dependencies. There are a number of ways of doing this. Firstly, each task is available as a property of the project, using the task name as the property name:

#### Example 81. Accessing tasks as properties

```
build.gradle
task hello

println hello.name
println project.hello.name
```

Tasks are also available through the `tasks` collection.

#### Example 82. Accessing tasks via tasks collection

```
build.gradle
task hello

println tasks.hello.name
println tasks['hello'].name
```

You can access tasks from any project using the task's path using the `tasks.getByPath()` method. You can call the `getByPath()` method with a task name, or a relative path, or an absolute path.

#### Example 83. Accessing tasks by path

```
build.gradle
project(':projectA') {
    task hello
}

task hello

println tasks.getByPath('hello').path
println tasks.getByPath(':hello').path
println tasks.getByPath('projectA:hello').path
println tasks.getByPath(':projectA:hello').path
```

#### Output of `gradle -q hello`

```
> gradle -q hello
:hello
:hello
:projectA:hello
:projectA:hello
```

Have a look at [TaskContainer](#) for more options for locating tasks.

§

## Configuring tasks

As an example, let's look at the `Copy` task provided by Gradle. To create a `Copy` task for your build, you can declare in your build script:

### Example 84. Creating a copy task

**build.gradle**

```
task myCopy(type: Copy)
```

This creates a copy task with no default behavior. The task can be configured using its API (see [Copy](#)). The following examples show several different ways to achieve the same configuration.

Just to be clear, realize that the name of this task is “`myCopy`”, but it is of *type* “`Copy`”. You can have multiple tasks of the same *type*, but with different names. You'll find this gives you a lot of power to implement cross-cutting concerns across all tasks of a particular type.

### Example 85. Configuring a task - various ways

**build.gradle**

```
Copy myCopy = task(myCopy, type: Copy)
myCopy.from 'resources'
myCopy.into 'target'
myCopy.include('**/*.txt', '**/*.xml', '**/*.properties')
```

This is similar to the way we would configure objects in Java. You have to repeat the context (`myCopy`) in the configuration statement every time. This is a redundancy and not very nice to read.

There is another way of configuring a task. It also preserves the context and it is arguably the most readable. It is usually our favorite.

### Example 86. Configuring a task - with closure

**build.gradle**

```
task myCopy(type: Copy)

myCopy {
    from 'resources'
    into 'target'
    include('**/*.txt', '**/*.xml', '**/*.properties')
}
```

This works for *any* task. Line 3 of the example is just a shortcut for the `tasks.getByName()` method. It is

important to note that if you pass a closure to the `getByName()` method, this closure is applied to *configure* the task, not when the task executes.

You can also use a configuration closure when you define a task.

#### Example 87. Defining a task with closure

```
build.gradle
task copy(type: Copy) {
    from 'resources'
    into 'target'
    include('**/*.txt', '**/*.xml', '**/*.properties')
}
```

#### Don't forget about the build phases

A task has both configuration and actions. When using the `doLast`, you are simply using a shortcut to define an action. Code defined in the configuration section of your task will get executed during the configuration phase of the build regardless of what task was targeted. See *Build Lifecycle* for more details about the build lifecycle.

## §

### Passing arguments to a task constructor

As opposed to configuring the mutable properties of a `Task` after creation, you can pass argument values to the `Task` class's constructor. In order to pass values to the `Task` constructor, you must annotate the relevant constructor with `@javax.inject.Inject`.

#### Example 88. Task class with `@Inject` constructor

```
build.gradle
class CustomTask extends DefaultTask {
    final String message
    final int number

    @Inject
    CustomTask(String message, int number) {
        this.message = message
        this.number = number
    }
}
```

You can then create a task, passing the constructor arguments at the end of the parameter list.

#### Example 89. Creating a task with constructor arguments using `TaskContainer`

```
build.gradle
tasks.create('myTask', CustomTask, 'hello', 42)
```

In a Groovy build script, you can create the task using `constructorArgs`.

#### Example 90. Creating a task with constructor arguments using Map

**build.gradle**

```
task myTask(type: CustomTask, constructorArgs: ['hello', 42])
```

In a Kotlin build script, you can pass constructor arguments using the reified extension function on the `tasks` `TaskContainer`.

#### Example 91. Creating a task with constructor arguments using Kotlin DSL

**build.gradle.kts**

```
open class CustomTask @Inject constructor(private val message: String, private val number: Int) {
    @TaskAction fun run() = println("$message $number")
}

tasks.create<CustomTask>("myTask", "hello", 42)
```

In all circumstances, the values passed as constructor arguments must be non-null. If you attempt to pass a `null` value, Gradle will throw a `NullPointerException` indicating which runtime value is `null`.

## §

### Adding dependencies to a task

There are several ways you can define the dependencies of a task. In the section called “Task dependencies” you were introduced to defining dependencies using task names. Task names can refer to tasks in the same project as the task, or to tasks in other projects. To refer to a task in another project, you prefix the name of the task with the path of the project it belongs to. The following is an example which adds a dependency from `projectA:taskX` to `projectB:taskY`:

### Example 92. Adding dependency on task from another project

#### build.gradle

```
project('projectA') {
    task taskX(dependsOn: ':projectB:taskY') {
        doLast {
            println 'taskX'
        }
    }
}

project('projectB') {
    task taskY {
        doLast {
            println 'taskY'
        }
    }
}
```

#### Output of `gradle -q taskX`

```
> gradle -q taskX
taskY
taskX
```

Instead of using a task name, you can define a dependency using a `Task` object, as shown in this example:

### Example 93. Adding dependency using task object

#### build.gradle

```
task taskX {
    doLast {
        println 'taskX'
    }
}

task taskY {
    doLast {
        println 'taskY'
    }
}

taskX.dependsOn taskY
```

#### Output of `gradle -q taskX`

```
> gradle -q taskX
taskY
taskX
```

For more advanced uses, you can define a task dependency using a closure. When evaluated, the closure is



passed the task whose dependencies are being calculated. The closure should return a single `Task` or collection of `Task` objects, which are then treated as dependencies of the task. The following example adds a dependency from `taskX` to all the tasks in the project whose name starts with `lib`:

#### Example 94. Adding dependency using closure

##### build.gradle

```
task taskX {
    doLast {
        println 'taskX'
    }
}

taskX.dependsOn {
    tasks.findAll { task -> task.name.startsWith('lib') }
}

task lib1 {
    doLast {
        println 'lib1'
    }
}

task lib2 {
    doLast {
        println 'lib2'
    }
}

task notALib {
    doLast {
        println 'notALib'
    }
}
```

##### Output of `gradle -q taskX`

```
> gradle -q taskX
lib1
lib2
taskX
```

For more information about task dependencies, see the [Task API](#).

## §

### Ordering tasks

**Note:** Task ordering is an incubating feature. Please be aware that this feature may change in later Gradle versions.

In some cases it is useful to control the *order* in which 2 tasks will execute, without introducing an explicit dependency between those tasks. The primary difference between a task *ordering* and a task *dependency* is that an ordering rule does not influence which tasks will be executed, only the order in which they will be executed.

Task ordering can be useful in a number of scenarios:

Enforce sequential ordering of tasks: e.g. 'build' never runs before 'clean'.

Run build validations early in the build: e.g. validate I have the correct credentials before starting the work for a release build.

Get feedback faster by running quick verification tasks before long verification tasks: e.g. unit tests should run before integration tests.

A task that aggregates the results of all tasks of a particular type: e.g. test report task combines the outputs of all executed test tasks.

There are two ordering rules available: “*must run after*” and “*should run after*”.

When you use the “must run after” ordering rule you specify that `taskB` must always run after `taskA`, whenever both `taskA` and `taskB` will be run. This is expressed as `taskB.mustRunAfter(taskA)`. The “should run after” ordering rule is similar but less strict as it will be ignored in two situations. Firstly if using that rule introduces an ordering cycle. Secondly when using parallel execution and all dependencies of a task have been satisfied apart from the “should run after” task, then this task will be run regardless of whether its “should run after” dependencies have been run or not. You should use “should run after” where the ordering is helpful but not strictly required.

With these rules present it is still possible to execute `taskA` without `taskB` and vice-versa.

### Example 95. Adding a 'must run after' task ordering

#### build.gradle

```
task taskX {
    doLast {
        println 'taskX'
    }
}
task taskY {
    doLast {
        println 'taskY'
    }
}
taskY.mustRunAfter taskX
```

#### Output of `gradle -q taskY taskX`

```
> gradle -q taskY taskX
taskX
taskY
```

### Example 96. Adding a 'should run after' task ordering

#### build.gradle

```
task taskX {
    doLast {
        println 'taskX'
    }
}
task taskY {
    doLast {
        println 'taskY'
    }
}
taskY.shouldRunAfter taskX
```

#### Output of `gradle -q taskY taskX`

```
> gradle -q taskY taskX
taskX
taskY
```

In the examples above, it is still possible to execute `taskY` without causing `taskX` to run:

### Example 97. Task ordering does not imply task execution

#### Output of `gradle -q taskY`

```
> gradle -q taskY
taskY
```

To specify a “must run after” or “should run after” ordering between 2 tasks, you use the `Task.mustRunAfter(java.lang.Object[])` and `Task.shouldRunAfter(java.lang.Object[])` methods. These methods accept a task instance, a task name or any other input accepted by `Task.dependsOn(java.lang.Object[])`.

Note that “`B.mustRunAfter(A)`” or “`B.shouldRunAfter(A)`” does not imply any execution dependency between the tasks:

It is possible to execute tasks `A` and `B` independently. The ordering rule only has an effect when both tasks are scheduled for execution.

When run with `--continue`, it is possible for `B` to execute in the event that `A` fails.

As mentioned before, the “should run after” ordering rule will be ignored if it introduces an ordering cycle:

**Example 98.** A 'should run after' task ordering is ignored if it introduces an ordering cycle

**build.gradle**

```
task taskX {
    doLast {
        println 'taskX'
    }
}
task taskY {
    doLast {
        println 'taskY'
    }
}
task taskZ {
    doLast {
        println 'taskZ'
    }
}
taskX.dependsOn taskY
taskY.dependsOn taskZ
taskZ.shouldRunAfter taskX
```

**Output of `gradle -q taskX`**

```
> gradle -q taskX
taskZ
taskY
taskX
```

## §

### Adding a description to a task

You can add a description to your task. This description is displayed when executing `gradle tasks`.

### Example 99. Adding a description to a task

#### build.gradle

```
task copy(type: Copy) {  
    description 'Copies the resource directory to the target directory.'  
    from 'resources'  
    into 'target'  
    include('**/*.txt', '**/*.xml', '**/*.properties')  
}
```

§

## Replacing tasks

Sometimes you want to replace a task. For example, if you want to exchange a task added by the Java plugin with a custom task of a different type. You can achieve this with:

### Example 100. Overwriting a task

#### build.gradle

```
task copy(type: Copy)  
  
task copy(overwrite: true) {  
    doLast {  
        println('I am the new one.')  
    }  
}
```

#### Output of `gradle -q copy`

```
> gradle -q copy  
I am the new one.
```

This will replace a task of type `Copy` with the task you've defined, because it uses the same name. When you define the new task, you have to set the `overwrite` property to `true`. Otherwise Gradle throws an exception, saying that a task with that name already exists.

§

## Skipping tasks

Gradle offers multiple ways to skip the execution of a task.

§

## Using a predicate

You can use the `onlyIf()` method to attach a predicate to a task. The task's actions are only executed if the predicate evaluates to true. You implement the predicate as a closure. The closure is passed the task as a parameter, and should return true if the task should execute and false if the task should be skipped. The predicate is evaluated just before the task is due to be executed.

### Example 101. Skipping a task using a predicate

#### **build.gradle**

```
task hello {
    doLast {
        println 'hello world'
    }
}

hello.onlyIf { !project.hasProperty('skipHello') }
```

#### **Output of `gradle hello -PskipHello`**

```
> gradle hello -PskipHello
> Task :hello SKIPPED

BUILD SUCCESSFUL in 0s
```

§

## Using `StopExecutionException`

If the logic for skipping a task can't be expressed with a predicate, you can use the [StopExecutionException](#). If this exception is thrown by an action, the further execution of this action as well as the execution of any following action of this task is skipped. The build continues with executing the next task.

### Example 102. Skipping tasks with `StopExecutionException`

#### **build.gradle**

```
task compile {
    doLast {
        println 'We are doing the compile.'
    }
}

compile.doFirst {
    // Here you would put arbitrary conditions in real life.
    // But this is used in an integration test so we want defined behavior.
    if (true) { throw new StopExecutionException() }
}

task myTask(dependsOn: 'compile') {
    doLast {
        println 'I am not affected'
    }
}
```

#### Output of **gradle -q myTask**

```
> gradle -q myTask
I am not affected
```

This feature is helpful if you work with tasks provided by Gradle. It allows you to add *conditional* execution of the built-in actions of such a task.<sup>[4]</sup>

§

### Enabling and disabling tasks

Every task has an `enabled` flag which defaults to `true`. Setting it to `false` prevents the execution of any of the task's actions. A disabled task will be labelled SKIPPED.

### Example 103. Enabling and disabling tasks

#### **build.gradle**

```
task disableMe {
    doLast {
        println 'This should not be printed if the task is disabled.'
    }
}

disableMe.enabled = false
```

#### Output of **gradle disableMe**

```
> gradle disableMe
> Task :disableMe SKIPPED
```

```
BUILD SUCCESSFUL in 0s
```

§

## Up-to-date checks (AKA Incremental Build)

An important part of any build tool is the ability to avoid doing work that has already been done. Consider the process of compilation. Once your source files have been compiled, there should be no need to recompile them unless something has changed that affects the output, such as the modification of a source file or the removal of an output file. And compilation can take a significant amount of time, so skipping the step when it's not needed saves a lot of time.

Gradle supports this behavior out of the box through a feature it calls incremental build. You have almost certainly already seen it in action: it's active nearly every time the `UP-TO-DATE` text appears next to the name of a task when you run a build. Task outcomes are described in the section called "Task outcomes".


How does incremental build work? And what does it take to make use of it in your own tasks? Let's take a look.

§

### Task inputs and outputs

In the most common case, a task takes some inputs and generates some outputs. If we use the compilation example from earlier, we can see that the source files are the inputs and, in the case of Java, the generated class files are the outputs. Other inputs might include things like whether debug information should be included.

**Figure 9. Example task inputs and outputs**

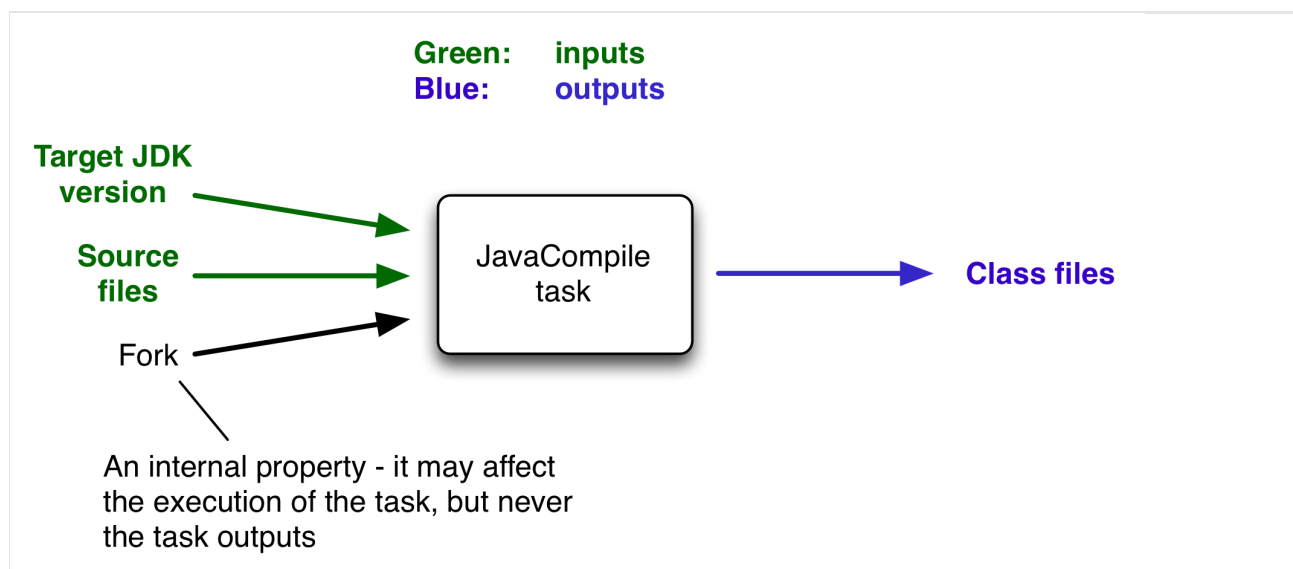

An important characteristic of an input is that it affects one or more outputs, as you can see from the previous figure. Different bytecode is generated depending on the content of the source files and the minimum version of the Java runtime you want to run the code on. That makes them task inputs. But



whether compilation has 500MB or 600MB of maximum memory available, determined by the `memoryMaximumSize` property, has no impact on what bytecode gets generated. In Gradle terminology, `memoryMaximumSize` is just an internal task property.

As part of incremental build, Gradle tests whether any of the task inputs or outputs have changed since the last build. If they haven't, Gradle can consider the task up to date and therefore skip executing its actions. Also note that incremental build won't work unless a task has at least one task output, although tasks usually have at least one input as well.

What this means for build authors is simple: you need to tell Gradle which task properties are inputs and which are outputs. If a task property affects the output, be sure to register it as an input, otherwise the task will be considered up to date when it's not. Conversely, don't register properties as inputs if they don't affect the output, otherwise the task will potentially execute when it doesn't need to. Also be careful of non-deterministic tasks that may generate different output for exactly the same inputs: these should not be configured for incremental build as the up-to-date checks won't work.

Let's now look at how you can register task properties as inputs and outputs.

§

### Custom task types

If you're implementing a custom task as a class, then it takes just two steps to make it work with incremental build:

Create typed properties (via getter methods) for each of your task inputs and outputs

Add the appropriate annotation to each of those properties

**Note:** Annotations must be placed on getters or on Groovy properties. Annotations placed on setters, or on a Java field without a corresponding annotated getter are ignored.

Gradle supports three main categories of inputs and outputs:

### Simple values

Things like strings and numbers. More generally, a simple value can have any type that implements `Serializable`.

### Filesystem types

These consist of the standard `File` class but also derivatives of Gradle's `FileCollection` type and anything else that can be passed to either the `Project.file(java.lang.Object)` method - for single file/directory properties - or the `Project.files(java.lang.Object[])`, `ProjectLayout.files(java.lang.Object[])`, and `ProjectLayout.configurableFiles(java.lang.Object[])` methods.

### Nested values

Custom types that don't conform to the other two categories but have their own properties that are inputs or

outputs. In effect, the task inputs or outputs are nested inside these custom types.

As an example, imagine you have a task that processes templates of varying types, such as FreeMarker, Velocity, Moustache, etc. It takes template source files and combines them with some model data to generate populated versions of the template files.

This task will have three inputs and one output:

Template source files

Model data

Template engine

Where the output files are written

When you're writing a custom task class, it's easy to register properties as inputs or outputs via annotations. To demonstrate, here is a skeleton task implementation with some suitable inputs and outputs, along with their annotations:

#### **Example 104. Custom task class**

```
buildSrc/src/main/java/org/example/ProcessTemplates.java
```

```

package org.example;

import java.io.File;
import java.util.HashMap;
import org.gradle.api.*;
import org.gradle.api.file.*;
import org.gradle.api.tasks.*;

public class ProcessTemplates extends DefaultTask {
    private TemplateEngineType templateEngine;
    private FileCollection sourceFiles;
    private TemplateData templateData;
    private File outputDir;

    @Input
    public TemplateEngineType getTemplateEngine() {
        return this.templateEngine;
    }

    @InputFiles
    public FileCollection getSourceFiles() {
        return this.sourceFiles;
    }

    @Nested
    public TemplateData getTemplateData() {
        return this.templateData;
    }

    @OutputDirectory
    public File getOutputDir() { return this.outputDir; }

    // + setter methods for the above - assume we've defined them

    @TaskAction
    public void processTemplates() {
        // ...
    }
}

```

**buildSrc/src/main/java/org/example/TemplateData.java**

```

package org.example;

import java.util.HashMap;
import java.util.Map;
import org.gradle.api.tasks.Input;

public class TemplateData {
    private String name;
    private Map<String, String> variables;

    public TemplateData(String name, Map<String, String> variables) {
        this.name = name;
        this.variables = new HashMap<>(variables);
    }

    @Input
    public String getName() { return this.name; }

    @Input
    public Map<String, String> getVariables() {
        return this.variables;
    }
}

```

#### Output of `gradle processTemplates`

```

> gradle processTemplates
> Task :processTemplates

```

```

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed

```

#### Output of `gradle processTemplates`

```

> gradle processTemplates
> Task :processTemplates UP-TO-DATE

```

```

BUILD SUCCESSFUL in 0s
1 actionable task: 1 up-to-date

```

There's plenty to talk about in this example, so let's work through each of the input and output properties in turn:

`templateEngine`

Represents which engine to use when processing the source templates, e.g. FreeMarker, Velocity, etc. You could implement this as a string, but in this case we have gone for a custom enum as it provides greater type information and safety. Since enums implement `Serializable` automatically, we can treat this as a simple value and use the `@Input` annotation, just as we would with a `String` property.

`sourceFiles`

The source templates that the task will be processing. Single files and collections of files need their own special annotations. In this case, we're dealing with a collection of input files and so we use the `@InputFile` annotation. You'll see more file-oriented annotations in a table later.

`templateData`

For this example, we're using a custom class to represent the model data. However, it does not implement `Serializable`, so we can't use the `@Input` annotation. That's not a problem as the properties within `TemplateData` - a string and a hash map with serializable type parameters - are serializable and can be annotated with `@Input`. We use `@Nested` on `templateData` to let Gradle know that this is a value with nested input properties.

`outputDir`

The directory where the generated files go. As with input files, there are several annotations for output files and directories. A property representing a single directory requires `@OutputDirectory`. You'll learn about the others soon.

These annotated properties mean that Gradle will skip the task if none of the source files, template engine, model data or generated files have changed since the previous time Gradle executed the task. This will often save a significant amount of time. You can learn how Gradle detects changes later.

This example is particularly interesting because it works with collections of source files. What happens if only one source file changes? Does the task process all the source files again or just the modified one? That depends on the task implementation. If the latter, then the task itself is incremental, but that's a different feature to the one we're discussing here. Gradle does help task implementers with this via its incremental task inputs feature.

Now that you have seen some of the input and output annotations in practice, let's take a look at all the annotations available to you and when you should use them. The table below lists the available annotations and the corresponding property type you can use with each one.

**Table 4. Incremental build property type annotations**

Annotation	Expected property type	Description
<code>Input</code>	Any serializable type	A simple input value
<code>InputFile</code>	<code>File*</code>	A single input file (not directory)
<code>InputDirectory</code>	<code>File*</code>	A single input directory (not file)
<code>InputFiles</code>	<code>Iterable&lt;File&gt;*</code>	An iterable of input files and directories

<code>Classpath</code>	<code>Iterable&lt;File&gt;*</code>	<p>An iterable of input files and directories that represent a Java classpath. This allows the task to ignore irrelevant changes to the property, such as different names for the same files. It is similar to annotating the property <code>@PathSensitive</code> but it will ignore the names of JAR files directly added to the classpath, and it will consider changes in the order of the files as a change in the classpath. Gradle will inspect the contents of jar files on the classpath and ignore changes that do not affect the semantics of the classpath (such as file dates and entry order). See also the section called “Using the classpath annotations”.</p> <p><b>Note:</b> The <code>@Classpath</code> annotation was introduced in Gradle 3.2. To stay compatible with earlier Gradle versions, classpath properties should also be annotated with <code>@InputFiles</code>.</p>
<code>CompileClasspath</code>	<code>Iterable&lt;File&gt;*</code>	<p>An iterable of input files and directories that represent a Java compile classpath. This allows the task to ignore irrelevant changes that do not affect the API of the classes in classpath. See also the section called “Using the classpath annotations”.</p> <p>The following kinds of changes to the classpath will be ignored:</p> <ul style="list-style-type: none"> <li>• Changes to the path of jar or top level directories.</li> <li>• Changes to timestamps and the order of entries in Jars.</li> <li>• Changes to resources and Jar manifests, including adding or removing resources.</li> <li>• Changes to private class elements, such as private fields, methods and inner classes.</li> <li>• Changes to code, such as method bodies, static initializers and field initializers (except for constants).</li> <li>• Changes to debug information, for example when a change to a comment affects the line numbers in class debug information.</li> <li>• Changes to directories, including directory entries in Jars.</li> </ul> <p><b>Note:</b> The <code>@CompileClasspath</code> annotation was introduced in Gradle 3.4. To stay compatible with Gradle 3.3 and 3.2, compile classpath properties should also be annotated with <code>@Classpath</code>. For compatibility with Gradle versions before 3.2 the property should also be annotated with <code>@InputFiles</code>.</p>
<code>OutputFile</code>	<code>File*</code>	A single output file (not directory)
<code>OutputDirectory</code>	<code>File*</code>	A single output directory (not file)
<code>OutputFiles</code>	<code>Map&lt;String, File&gt;*</code> <code>** or Iterable&lt;File&gt;*</code>	An iterable of output files (no directories). The task outputs can only be cached if a Map is provided.

<code>OutputDirectories</code>	<code>Map&lt;String, File&gt;</code> <code>**</code> or <code>Iterable&lt;File&gt;</code> <code>*</code>	An iterable of output directories (no files). The task outputs can only be cached if a <code>Map</code> is provided.
<code>Destroys</code>	<code>File</code> or <code>Iterable&lt;File&gt;</code> <code>*</code>	Specifies one or more files that are removed by this task. Note that a task can define either inputs/outputs or destroyables, but not both.
<code>LocalState</code>	<code>File</code> or <code>Iterable&lt;File&gt;</code> <code>*</code>	Specifies one or more files that represent the local state of the task. These files are removed when the task is loaded from cache.
<code>Nested</code>	Any custom type	A custom type that may not implement <code>Serializable</code> but does have at least one field or property marked with one of the annotations in this table. It could even be another <code>@Nested</code> .
<code>Console</code>	Any type	Indicates that the property is neither an input nor an output. It simply affects the console output of the task in some way, such as increasing or decreasing the verbosity of the task.
<code>Internal</code>	Any type	Indicates that the property is used internally but is neither an input nor an output.

\*

In fact, `File` can be any type accepted by `Project.file(java.lang.Object)` and `Iterable<File>` can be any type accepted by `Project.files(java.lang.Object[])`, `ProjectLayout.files(java.lang.Object[])`, or `ProjectLayout.configurableFiles(java.lang.Object[])`. This includes instances of `Callable`, such as closures, allowing for lazy evaluation of the property values. Be aware that the types `FileCollection` and `FileTree` are `Iterable<File>`s.

\*\*

Similar to the above, `File` can be any type accepted by `Project.file(java.lang.Object)`. The `Map` itself can be wrapped in `Callables`, such as closures.

**Table 5. Additional annotations used to further qualifying property type annotations**

Annotation	Description
<code>SkipWhenEmpty</code>	Used with <code>@InputFiles</code> or <code>@InputDirectory</code> to tell Gradle to skip the task if the corresponding files or directory are empty, along with all other input files declared with this annotation. Tasks that have been skipped due to all of their input files that were declared with this annotation being empty will result in a distinct “no source” outcome. For example, <code>NO-SOURCE</code> will be emitted in the console output.
<code>Optional</code>	Used with any of the property type annotations listed in the <code>Optional</code> API documentation. This annotation disables validation checks on the corresponding property. See the section on validation for more details.
<code>PathSensitive</code>	Used with any input file property to tell Gradle to only consider the given part of the file paths as important. For example, if a property is annotated with <code>@PathSensitive(PathSensitivity.NAME_ONLY)</code> , then moving the files around without changing their contents will not make the task out-of-date.

Annotations are inherited from all parent types including implemented interfaces. Property type annotations override any other property type annotation declared in a parent type. This way an `@InputFile` property can be turned into an `@InputDirectory` property in a child task type.

Annotations on a property declared in a type override similar annotations declared by the superclass and in any implemented interfaces. Superclass annotations take precedence over annotations declared in implemented interfaces.

The `Console` and `Internal` annotations in the table are special cases as they don’t declare either task inputs or task outputs. So why use them? It’s so that you can take advantage of the Java Gradle Plugin Development plugin to help you develop and publish your own plugins. This plugin checks whether any properties of your custom task classes lack an incremental build annotation. This protects you from forgetting to add an appropriate annotation during development.

§

Using the classpath annotations

Besides `@InputFiles`, for JVM-related tasks Gradle understands the concept of classpath inputs. Both runtime and compile classpaths are treated differently when Gradle is looking for changes.

As opposed to input properties annotated with `@InputFiles`, for classpath properties the order of the entries in the file collection matter. On the other hand, the names and paths of the directories and jar files on the classpath itself are ignored. Timestamps and the order of class files and resources inside jar files on a classpath are ignored, too, thus recreating a jar file with different file dates will not make the task out of date.

Runtime classpaths are marked with `@Classpath`, and they offer further customization via classpath normalization.

Input properties annotated with `@CompileClasspath` are considered Java compile classpaths. Additionally to the aforementioned general classpath rules, compile classpaths ignore changes to everything but class



files. Gradle uses the same class analysis described in the section called “Compile avoidance” to further filter changes that don’t affect the class’ ABIs. This means that changes which only touch the implementation of classes do not make the task out of date.

§

#### Nested inputs

When analyzing `@Nested` task properties for declared input and output sub-properties Gradle uses the type of the actual value. Hence it can discover all sub-properties declared by a runtime sub-type.

When adding `@Nested` to a `@Provider`, the value of the `Provider` is treated as a nested input.

When adding `@Nested` to an iterable, each element is treated as a separate nested input. Each nested input in the iterable is assigned a name, which by default is the dollar sign followed by the index in the iterable, e.g. `$2`. If an element of the iterable implements `Named`, then the name is used as property name. The ordering of the elements in the iterable is crucial for reliable up-to-date checks and caching if not all of the elements implement `Named`. Multiple elements which have the same name are not allowed.

When adding `@Nested` to a map, then for each value a nested input is added, using the key as name.

The type and classpath of nested inputs is tracked, too. This ensures that changes to the implementation of a nested input causes the build to be out of date. By this it is also possible to add user provided code as an input, e.g. by annotating an `@Action` property with `@Nested`. Note that any inputs to such actions should be tracked, either by annotated properties on the action or by manually registering them with the task.

Using nested inputs allows richer modeling and extensibility for tasks, as e.g. shown by `Test.getJvmArgumentLine`.

This allows us to model the JaCoCo Java agent, thus declaring the necessary JVM arguments and providing the inputs and outputs to Gradle:

```

class JacocoAgent implements CommandLineArgumentProvider {
    private final JacocoTaskExtension jacoco;

    public JacocoAgent(JacocoTaskExtension jacoco) {
        this.jacoco = jacoco;
    }

    @Nested
    @Optional
    public JacocoTaskExtension getJacoco() {
        return jacoco.isEnabled() ? jacoco : null;
    }

    @Override
    public Iterable<String> asArguments() {
        return jacoco.isEnabled() ? ImmutableList.of(jacoco.getAsJvmArg()) : Collections.emptyList();
    }
}

test.getJvmArgumentProviders().add(new JacocoAgent(extension))

```

For this to work, `JacocoTaskExtension` needs to have the correct input and output annotations.

The approach works for Test JVM arguments, since `Test.getJvmArgumentProviders()` is an `Iterable` annotated with `@Nested`.

There are other task types where this kind of nested inputs are available:

`JavaExec.getArgumentProviders()` - model e.g. custom tools

`JavaExec.getJvmArgumentProviders()` - used for Jacoco Java agent

`CompileOptions.getCompilerArgumentProviders()` - model e.g. annotation processors

`Exec.getArgumentProviders()` - model e.g. custom tools

In the same way, this kind of modelling is available to custom tasks.

§

## Runtime API

Custom task classes are an easy way to bring your own build logic into the arena of incremental build, but you don't always have that option. That's why Gradle also provides an alternative API that can be used with any tasks, which we look at next.

When you don't have access to the source for a custom task class, there is no way to add any of the annotations we covered in the previous section. Fortunately, Gradle provides a runtime API for scenarios just like that. It can also be used for ad-hoc tasks, as you'll see next.

\$

Using it for ad-hoc tasks

This runtime API is provided through a couple of aptly named properties that are available on every Gradle task:

`Task.getInputs()` of type `TaskInputs`

`Task.getOutputs()` of type `TaskOutputs`

`Task.getDestroyables()` of type `TaskDestroyables`

These objects have methods that allow you to specify files, directories and values which constitute the task's inputs and outputs. In fact, the runtime API has almost feature parity with the annotations. All it lacks is validation of whether declared files are actually files and declared directories are directories. Nor will it create output directories if they don't exist. But that's it.

Let's take the template processing example from before and see how it would look as an ad-hoc task that uses the runtime API:

#### Example 105. Ad-hoc task

##### **build.gradle**

```
task processTemplatesAdHoc {
    inputs.property("engine", TemplateEngineType.FREEMARKER)
    inputs.files(fileTree("src/templates"))
    inputs.property("templateData.name", "docs")
    inputs.property("templateData.variables", [year: 2013])
    outputs.dir("$buildDir/genOutput2")

    doLast {
        // Process the templates here
    }
}
```

##### **Output of `gradle processTemplatesAdHoc`**

```
> gradle processTemplatesAdHoc
```

```
> Task :processTemplatesAdHoc
```

```
BUILD SUCCESSFUL in 0s
```

```
1 actionable task: 1 executed
```

As before, there's much to talk about. To begin with, you should really write a custom task class for this as it's a non-trivial implementation that has several configuration options. In this case, there are no task properties to store the root source folder, the location of the output directory or any of the other settings. That's deliberate to highlight the fact that the runtime API doesn't require the task to have any state. In terms of incremental build, the above ad-hoc task will behave the same as the custom task class.

All the input and output definitions are done through the methods on `inputs` and `outputs`, such as `proper`, `files()`, and `dir()`. Gradle performs up-to-date checks on the argument values to determine whether the task needs to run again or not. Each method corresponds to one of the incremental build annotations, for example `inputs.property()` maps to `@Input` and `outputs.dir()` maps to `@OutputDirectory`. The only difference is that the `file()`, `files()`, `dir()` and `dirs()` methods don't validate the type of file object at the given path (file or directory), unlike the annotations.

The files that a task removes can be specified through `destroyables.register()`.

#### Example 106. Ad-hoc task declaring a destroyable

##### **build.gradle**

```
task removeTempDir {
    destroyables.register("$projectDir/tmpDir")
    doLast {
        delete("$projectDir/tmpDir")
    }
}
```

One notable difference between the runtime API and the annotations is the lack of a method that corresponds directly to `@Nested`. That's why the example uses two `property()` declarations for the template data, one for each `TemplateData` property. You should utilize the same technique when using the runtime API with nested values. Any given task can either declare destroyables or inputs/outputs, but cannot declare both.

§

Using it for custom task types

Another type of example involves adding input and output definitions to instances of a custom task class that lacks the requisite annotations. For example, imagine that the `ProcessTemplates` task is provided by a plugin and that it's missing the incremental build annotations. In order to make up for that deficiency, you can use the runtime API:

### Example 107. Using runtime API with custom task type

#### build.gradle

```
task processTemplatesRuntime(type: ProcessTemplatesNoAnnotations) {
    templateEngine = TemplateEngineType.FREEMARKER
    sourceFiles = fileTree("src/templates")
    templateData = new TemplateData("test", [year: 2014])
    outputDir = file("$buildDir/genOutput3")

    inputs.property("engine", templateEngine)
    inputs.files(sourceFiles)
    inputs.property("templateData.name", templateData.name)
    inputs.property("templateData.variables", templateData.variables)
    outputs.dir(outputDir)
}
```

#### Output of `gradle processTemplatesRuntime`

```
> gradle processTemplatesRuntime
> Task :processTemplatesRuntime
```

```
BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

#### Output of `gradle processTemplatesRuntime`

```
> gradle processTemplatesRuntime
> Task :processTemplatesRuntime UP-TO-DATE
```

```
BUILD SUCCESSFUL in 0s
1 actionable task: 1 up-to-date
```

As you can see, we can both configure the tasks properties and use those properties as arguments to the incremental build runtime API. Using the runtime API like this is a little like using `doLast()` and `doFirst()` to attach extra actions to a task, except in this case we're attaching information about inputs and outputs. Note that if the task type is already using the incremental build annotations, the runtime API will add inputs and outputs rather than replace them.

\$  
Fine-grained configuration

The runtime API methods only allow you to declare your inputs and outputs in themselves. However, the file-oriented ones return a builder - of type `TaskInputFilePropertyBuilder` - that lets you provide additional information about those inputs and outputs.

You can learn about all the options provided by the builder in its API documentation, but we'll show you a simple example here to give you an idea of what you can do.

Let's say we don't want to run the `processTemplates` task if there are no source files, regardless of

whether it's a clean build or not. After all, if there are no source files, there's nothing for the task to do. The builder allows us to configure this like so:

#### Example 108. Using `skipWhenEmpty()` via the runtime API

##### **build.gradle**

```
task processTemplatesRuntimeConf(type: ProcessTemplatesNoAnnotations) {  
    // ...  
    sourceFiles = fileTree("src/templates") {  
        include "**/*.fm"  
    }  
  
    inputs.files(sourceFiles).skipWhenEmpty()  
    // ...  
}
```

##### **Output of `gradle clean processTemplatesRuntimeConf`**

```
> gradle clean processTemplatesRuntimeConf  
> Task :processTemplatesRuntimeConf NO-SOURCE  
  
BUILD SUCCESSFUL in 0s  
1 actionable task: 1 up-to-date
```

The `TaskInputs.files()` method returns a builder that has a `skipWhenEmpty()` method. Invoking this method is equivalent to annotating to the property with [@SkipWhenEmpty](#).

Prior to Gradle 3.0, you had to use the `TaskInputs.source()` and `TaskInputs.sourceDir()` methods to get the same behavior as with `skipWhenEmpty()`. These methods are now deprecated and should not be used with Gradle 3.0 and above.

Now that you have seen both the annotations and the runtime API, you may be wondering which API you should be using. Our recommendation is to use the annotations wherever possible, and it's sometimes worth creating a custom task class just so that you can make use of them. The runtime API is more for situations in which you can't use the annotations.

§

Important beneficial side effects

Once you declare a task's formal inputs and outputs, Gradle can then infer things about those properties. For example, if an input of one task is set to the output of another, that means the first task depends on the second, right? Gradle knows this and can act upon it.

We'll look at this feature next and also some other features that come from Gradle knowing things about inputs and outputs.

\$

Inferred task dependencies

Consider an archive task that packages the output of the `processTemplates` task. A build author will see that the archive task obviously requires `processTemplates` to run first and so may add an explicit dependency. However, if you define the archive task like so:

#### Example 109. Inferred task dependency via task outputs

**build.gradle**

```
task packageFiles(type: Zip) {
    from processTemplates.outputs
}
```

**Output of `gradle clean packageFiles`**

```
> gradle clean packageFiles
> Task :processTemplates
> Task :packageFiles
```

```
BUILD SUCCESSFUL in 0s
3 actionable tasks: 2 executed, 1 up-to-date
```

Gradle will automatically make `packageFiles` depend on `processTemplates`. It can do this because it's aware that one of the inputs of `packageFiles` requires the output of the `processTemplates` task. We call this an inferred task dependency.

The above example can also be written as

#### Example 110. Inferred task dependency via a task argument

**build.gradle**

```
task packageFiles2(type: Zip) {
    from processTemplates
}
```

**Output of `gradle clean packageFiles2`**

```
> gradle clean packageFiles2
> Task :processTemplates
> Task :packageFiles2
```

```
BUILD SUCCESSFUL in 0s
3 actionable tasks: 2 executed, 1 up-to-date
```

This is because the `from()` method can accept a task object as an argument. Behind the scenes, `from()` uses the `project.files()` method to wrap the argument, which in turn exposes the task's formal outputs as a file collection. In other words, it's a special case!

§

#### Input and output validation

The incremental build annotations provide enough information for Gradle to perform some basic validation on the annotated properties. In particular, it does the following for each property before the task executes:

`@InputFile` - verifies that the property has a value and that the path corresponds to a file (not a directory) that exists.

`@InputDirectory` - same as for `@InputFile`, except the path must correspond to a directory.

`@OutputDirectory` - verifies that the path doesn't match a file and also creates the directory if it doesn't already exist.

Such validation improves the robustness of the build, allowing you to identify issues related to inputs and outputs quickly.

You will occasionally want to disable some of this validation, specifically when an input file may validly not exist. That's why Gradle provides the `@Optional` annotation: you use it to tell Gradle that a particular input is optional and therefore the build should not fail if the corresponding file or directory doesn't exist.

§

#### Continuous build

Another benefit of defining task inputs and outputs is continuous build. Since Gradle knows what files a task depends on, it can automatically run a task again if any of its inputs change. By activating continuous build when you run Gradle - through the `--continuous` or `-t` options - you will put Gradle into a state in which it continually checks for changes and executes the requested tasks when it encounters such changes.

You can find out more about this feature in the section called "Continuous Build".

§

#### Task parallelism

One last benefit of defining task inputs and outputs is that Gradle can use this information to make decisions about how to run tasks when the `"--parallel"` option is used. For instance, Gradle will inspect the outputs of tasks when selecting the next task to run and will avoid concurrent execution of tasks that write to the same output directory. Similarly, Gradle will use the information about what files a task destroys (e.g. specified by the `Destroys` annotation) and avoid running a task that removes a set of files while another task is running that consumes or creates those same files (and vice versa). It can also determine that a task that creates a set of files has already run and that a task that consumes those files has yet to run and will avoid running a task that removes those files in between. By providing task input and output information in this way, Gradle can infer creation/consumption/destruction relationships between tasks and can ensure that task execution does not violate those relationships.



§

## How does it work?

Before a task is executed for the first time, Gradle takes a snapshot of the inputs. This snapshot contains the paths of input files and a hash of the contents of each file. Gradle then executes the task. If the task completes successfully, Gradle takes a snapshot of the outputs. This snapshot contains the set of output files and a hash of the contents of each file. Gradle persists both snapshots for the next time the task is executed.

Each time after that, before the task is executed, Gradle takes a new snapshot of the inputs and outputs. If the new snapshots are the same as the previous snapshots, Gradle assumes that the outputs are up to date and skips the task. If they are not the same, Gradle executes the task. Gradle persists both snapshots for the next time the task is executed.

Gradle also considers the *code* of the task as part of the inputs to the task. When a task, its actions, or its dependencies change between executions, Gradle considers the task as out-of-date.

Gradle understands if a file property (e.g. one holding a Java classpath) is order-sensitive. When comparing the snapshot of such a property, even a change in the order of the files will result in the task becoming out-of-date.

Note that if a task has an output directory specified, any files added to that directory since the last time it was executed are ignored and will NOT cause the task to be out of date. This is so unrelated tasks may share an output directory without interfering with each other. If this is not the behaviour you want for some reason, consider using `TaskOutputs.upToDateWhen(groovy.lang.Closure)`

The inputs for the task are also used to calculate the build cache key used to load task outputs when enabled. For more details see the section called “Task Output Caching”.

§

## Advanced techniques

Everything you’ve seen so far in this section will cover most of the use cases you’ll encounter, but there are some scenarios that need special treatment. We’ll present a few of those next with the appropriate solutions.

§

### Adding your own cached input/output methods

Have you ever wondered how the `from()` method of the `Copy` task works? It’s not annotated with `@InputFile` and yet any files passed to it are treated as formal inputs of the task. What’s happening?

The implementation is quite simple and you can use the same technique for your own tasks to improve their APIs. Write your methods so that they add files directly to the appropriate annotated property. As an example, here’s how to add a `sources()` method to the custom `ProcessTemplates` class we introduced earlier:

### Example 111. Declaring a method to add task inputs

**buildSrc/src/main/java/org/example/ProcessTemplates.java**

```
public class ProcessTemplates extends DefaultTask {
    // ...
    private FileCollection sourceFiles = getProject().getLayout().files();

    @SkipWhenEmpty
    @InputFiles
    @PathSensitive(PathSensitivity.NONE)
    public FileCollection getSourceFiles() {
        return this.sourceFiles;
    }

    public void sources(FileCollection sourceFiles) {
        this.sourceFiles = this.sourceFiles.plus(sourceFiles);
    }

    // ...
}
```

**build.gradle**

```
task processTemplates(type: ProcessTemplates) {
    templateEngine = TemplateEngineType.FREEMARKER
    templateData = new TemplateData("test", [year: 2012])
    outputDir = file("$buildDir/genOutput")

    sources fileTree("src/templates")
}
```

#### Output of **gradle processTemplates**

```
> gradle processTemplates
> Task :processTemplates
```

```
BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

In other words, as long as you add values and files to formal task inputs and outputs during the configuration phase, they will be treated as such regardless from where in the build you add them.

If we want to support tasks as arguments as well and treat their outputs as the inputs, we can use the `project` method like so:

### Example 112. Declaring a method to add a task as an input

```
buildSrc/src/main/java/org/example/ProcessTemplates.java
```

```
// ...
public void sources(Task inputTask) {
    this.sourceFiles = this.sourceFiles.plus(getProject().getLayout().files(inputTask.getSourceFiles()))
}
// ...
```

```
build.gradle
```

```
task copyTemplates(type: Copy) {
    into "$buildDir/tmp"
    from "src/templates"
}

task processTemplates2(type: ProcessTemplates) {
    // ...
    sources copyTemplates
}
```

#### Output of `gradle processTemplates2`

```
> gradle processTemplates2
> Task :copyTemplates
> Task :processTemplates2
```

```
BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

This technique can make your custom task easier to use and result in cleaner build files. As an added benefit, our use of `getProject().getLayout().files()` means that our custom method can set up an inferred task dependency.

One last thing to note: if you are developing a task that takes collections of source files as inputs, like this example, consider using the built-in [SourceTask](#). It will save you having to implement some of the plumbing that we put into `ProcessTemplates`.

§

Linking an `@OutputDirectory` to an `@InputFiles`

When you want to link the output of one task to the input of another, the types often match and a simple property assignment will provide that link. For example, a `File` output property can be assigned to a `File` input.

Unfortunately, this approach breaks down when you want the files in a task's `@OutputDirectory` (of type `File`) to become the source for another task's `@InputFiles` property (of type `FileCollection`). Since the two have different types, property assignment won't work.

As an example, imagine you want to use the output of a Java compilation task - via the `destinationDir` property - as the input of a custom task that instruments a set of files containing Java bytecode. This custom task, which we'll call `Instrument`, has a `classFiles` property annotated with `@InputFiles`. You might initially try to configure the task like so:

#### Example 113. Failed attempt at setting up an inferred task dependency

##### build.gradle

```
apply plugin: "java"

task badInstrumentClasses(type: Instrument) {
    classFiles = fileTree(compileJava.destinationDir)
    destinationDir = file("$buildDir/instrumented")
}
```

##### Output of `gradle clean badInstrumentClasses`

```
> gradle clean badInstrumentClasses
> Task :clean UP-TO-DATE
> Task :badInstrumentClasses NO-SOURCE
```

```
BUILD SUCCESSFUL in 0s
1 actionable task: 1 up-to-date
```

There's nothing obviously wrong with this code, but you can see from the console output that the compilation task is missing. In this case you would need to add an explicit task dependency between `instrumentClass` and `compileJava` via `dependsOn`. The use of `fileTree()` means that Gradle can't infer the task dependency itself.

One solution is to use the `TaskOutputs.files` property, as demonstrated by the following example:

#### Example 114. Setting up an inferred task dependency between output dir and input files

##### build.gradle

```
task instrumentClasses(type: Instrument) {
    classFiles = compileJava.outputs.files
    destinationDir = file("$buildDir/instrumented")
}
```

##### Output of `gradle clean instrumentClasses`

```
> gradle clean instrumentClasses
> Task :clean UP-TO-DATE
> Task :compileJava
> Task :instrumentClasses

BUILD SUCCESSFUL in 0s
3 actionable tasks: 2 executed, 1 up-to-date
```

Alternatively, you can get Gradle to access the appropriate property itself by using one of `project.files()`, `project.layout.files()` or `project.layout.configurableFiles()` in place of `project.files()`:

#### Example 115. Setting up an inferred task dependency with `filesFor()`

##### **build.gradle**

```
task instrumentClasses2(type: Instrument) {
    classFiles = layout.files(compileJava)
    destinationDir = file("$buildDir/instrumented")
}
```

##### **Output of `gradle clean instrumentClasses2`**

```
> gradle clean instrumentClasses2
> Task :clean UP-TO-DATE
> Task :compileJava
> Task :instrumentClasses2
```

```
BUILD SUCCESSFUL in 0s
3 actionable tasks: 2 executed, 1 up-to-date
```

Remember that `files()`, `layout.files()` and `layout.configurableFiles()` can take tasks as arguments, whereas `fileTree()` cannot.

The downside of this approach is that all file outputs of the source task become the input files of the target - in this case. That's fine as long as the source task only has a single file-based output, like the `JavaCompile` task. But if you have to link just one output property among several, then you need to explicitly tell Gradle which task generates the input files using the `builtBy` method:

### Example 116. Setting up an inferred task dependency with `builtBy()`

#### **build.gradle**

```
task instrumentClassesBuiltBy(type: Instrument) {
    classFiles = fileTree(compileJava.destinationDir) {
        builtBy compileJava
    }
    destinationDir = file("$buildDir/instrumented")
}
```

#### **Output of `gradle clean instrumentClassesBuiltBy`**

```
> gradle clean instrumentClassesBuiltBy
> Task :clean UP-TO-DATE
> Task :compileJava
> Task :instrumentClassesBuiltBy
```

```
BUILD SUCCESSFUL in 0s
3 actionable tasks: 2 executed, 1 up-to-date
```

You can of course just add an explicit task dependency via `dependsOn`, but the above approach provides more semantic meaning, explaining why `compileJava` has to run beforehand.

§

Providing custom up-to-date logic

Gradle automatically handles up-to-date checks for output files and directories, but what if the task output is something else entirely? Perhaps it's an update to a web service or a database table. Gradle has no way of knowing how to check whether the task is up to date in such cases.

That's where the `upToDateWhen()` method on `TaskOutputs` comes in. This takes a predicate function that is used to determine whether a task is up to date or not. One use case is to disable up-to-date checks completely for a task, like so:

### Example 117. Ignoring up-to-date checks

#### build.gradle

```
task alwaysInstrumentClasses(type: Instrument) {
    classFiles = layout.files(compileJava)
    destinationDir = file("$buildDir/instrumented")
    outputs.upToDateWhen { false }
}
```

#### Output of `gradle clean alwaysInstrumentClasses`

```
> gradle clean alwaysInstrumentClasses
> Task :compileJava
> Task :alwaysInstrumentClasses
```

```
BUILD SUCCESSFUL in 0s
3 actionable tasks: 2 executed, 1 up-to-date
```

#### Output of `gradle alwaysInstrumentClasses`

```
> gradle alwaysInstrumentClasses
> Task :compileJava UP-TO-DATE
> Task :alwaysInstrumentClasses
```

```
BUILD SUCCESSFUL in 0s
2 actionable tasks: 1 executed, 1 up-to-date
```

The `{ false }` closure ensures that `copyResources` will always perform the copy, irrespective of whether there is no change in the inputs or outputs.

You can of course put more complex logic into the closure. You could check whether a particular record in a database table exists or has changed for example. Just be aware that up-to-date checks should save you time. Don't add checks that cost as much or more time than the standard execution of the task. In fact, if a task ends up running frequently anyway, because it's rarely up to date, then it may not be worth having an up-to-date check at all. Remember that your checks will always run if the task is in the execution task graph.

One common mistake is to use `upToDateWhen()` instead of `Task.onlyIf()`. If you want to skip a task on the basis of some condition unrelated to the task inputs and outputs, then you should use `onlyIf()`. For example, in cases where you want to skip a task when a particular property is set or not set.

§

#### Configure input normalization

For up to date checks and the build cache Gradle needs to determine if two task input properties have the same value. In order to do so, Gradle first normalizes both inputs and then compares the result. For example, for a compile classpath, Gradle extracts the ABI signature from the classes on the classpath and then compares signatures between the last Gradle run and the current Gradle run as described in the section called “Compile avoidance”.

It is possible to customize Gradle's built-in strategy for runtime classpath normalization. All inputs annotated with `@Classpath` are considered to be runtime classpaths.

Let's say you want to add a file `build-info.properties` to all your produced jar files which contains information about the build, e.g. the timestamp when the build started or some ID to identify the CI job that published the artifact. This file is only for auditing purposes, and has no effect on the outcome of running tests. Nonetheless, this file is part of the runtime classpath for the `test` task and changes on every build invocation. Therefore, the `test` would be never up-to-date or pulled from the build cache. In order to benefit from incremental builds again, you are able to tell Gradle to ignore this file on the runtime classpath at the project level by using `Project.normalization(org.gradle.api.Action)`:

#### Example 118. Runtime classpath normalization

##### **build.gradle**

```
normalization {  
    runtimeClasspath {  
        ignore 'build-info.properties'  
    }  
}
```

The effect of this configuration would be that changes to `build-info.properties` would be ignored for up-to-date checks and build cache key calculations. Note that this will not change the runtime behavior of the `test` task - i.e. any test is still able to load `build-info.properties` and the runtime classpath is still the same as before.

§

#### Stale task outputs

When the Gradle version changes, Gradle detects that outputs from tasks that ran with older versions of Gradle need to be removed to ensure that the newest version of the tasks are starting from a known clean state.

**Note:** Automatic clean-up of stale output directories has only been implemented for the output of source sets (Java/Groovy/Scala compilation).

§

#### Task rules

Sometimes you want to have a task whose behavior depends on a large or infinite number value range of parameters. A very nice and expressive way to provide such tasks are task rules:



### Example 119. Task rule

#### build.gradle

```
tasks.addRule("Pattern: ping<ID>") { String taskName ->
    if (taskName.startsWith("ping")) {
        task(taskName) {
            doLast {
                println "Pinging: " + (taskName - 'ping')
            }
        }
    }
}
```

#### Output of `gradle -q pingServer1`

```
> gradle -q pingServer1
Pinging: Server1
```

The String parameter is used as a description for the rule, which is shown with `gradle tasks`.

Rules are not only used when calling tasks from the command line. You can also create `dependsOn` relations on rule based tasks:

### Example 120. Dependency on rule based tasks

#### build.gradle

```
tasks.addRule("Pattern: ping<ID>") { String taskName ->
    if (taskName.startsWith("ping")) {
        task(taskName) {
            doLast {
                println "Pinging: " + (taskName - 'ping')
            }
        }
    }
}

task groupPing {
    dependsOn pingServer1, pingServer2
}
```

#### Output of `gradle -q groupPing`

```
> gradle -q groupPing
Pinging: Server1
Pinging: Server2
```

If you run `gradle -q tasks` you won't find a task named `pingServer1` or `pingServer2`, but this script is executing logic based on the request to run those tasks.

## §

### Finalizer tasks

**Note:** Finalizers tasks are an *incubating* feature (see the section called “Incubating”).

Finalizer tasks are automatically added to the task graph when the finalized task is scheduled to run.

#### Example 121. Adding a task finalizer

##### build.gradle

```
task taskX {
    doLast {
        println 'taskX'
    }
}
task taskY {
    doLast {
        println 'taskY'
    }
}

taskX.finalizedBy taskY
```

##### Output of `gradle -q taskX`

```
> gradle -q taskX
taskX
taskY
```

Finalizer tasks will be executed even if the finalized task fails.

### Example 122. Task finalizer for a failing task

#### build.gradle

```
task taskX {
    doLast {
        println 'taskX'
        throw new RuntimeException()
    }
}

task taskY {
    doLast {
        println 'taskY'
    }
}

taskX.finalizedBy taskY
```

#### Output of `gradle -q taskX`

```
> gradle -q taskX
taskX
taskY

FAILURE: Build failed with an exception.

* Where:
Build file '/home/user/gradle/samples/userguide/tasks/finalizersWithFailure/build.gradle' line: 10

* What went wrong:
Execution failed for task ':taskX'.
> java.lang.RuntimeException (no error message)

* Try:
Run with --stacktrace option to get the stack trace. Run with --info or --debug for more details.

* Get more help at https://help.gradle.org

BUILD FAILED in 0s
```

On the other hand, finalizer tasks are not executed if the finalized task didn't do any work, for example if it is considered up to date or if a dependent task fails.

Finalizer tasks are useful in situations where the build creates a resource that has to be cleaned up regardless of the build failing or succeeding. An example of such a resource is a web container that is started before an integration test task and which should be always shut down, even if some of the tests fail.

To specify a finalizer task you use the `Task.finalizedBy(java.lang.Object[])` method. This method accepts a task instance, a task name, or any other input accepted by `Task.dependsOn(java.lang.Object[])`.

§

## Lifecycle tasks

Lifecycle tasks are tasks that do not do work themselves. They typically do not have any task actions. Lifecycle tasks can represent several concepts:

a work-flow step (e.g., run all checks with `check`)

a buildable thing (e.g., create a debug 32-bit executable for native components with `debug32MainExecutable`)

a convenience task to execute many of the same logical tasks (e.g., run all compilation tasks with `compileA`)

Many Gradle plug-ins define their own lifecycle tasks to make it convenient to do specific things. When developing your own plugins, you should consider using your own lifecycle tasks or hooking into some of the tasks already provided by Gradle. See the Java plugin the section called “Tasks” for an example.

Unless a lifecycle task has actions, its outcome is determined by its dependencies. If any of the task’s dependencies are executed, the lifecycle task will be considered executed. If all of the task’s dependencies are up-to-date, skipped or from cache, the lifecycle task will be considered up-to-date.

§

## Summary

If you are coming from Ant, an enhanced Gradle task like `Copy` seems like a cross between an Ant target and an Ant task. Although Ant’s tasks and targets are really different entities, Gradle combines these notions into a single entity. Simple Gradle tasks are like Ant’s targets, but enhanced Gradle tasks also include aspects of Ant tasks. All of Gradle’s tasks share a common API and you can create dependencies between them. These tasks are much easier to configure than an Ant task. They make full use of the type system, and are more expressive and easier to maintain.

---

[4] You might be wondering why there is neither an import for the `StopExecutionException` nor do we access it via its fully qualified name. The reason is, that Gradle adds a set of default imports to your script (see the section called “Default imports”).

# Working With Files

Almost every Gradle build interacts with files in some way: think source files, file dependencies, reports and so on. That's why Gradle comes with a comprehensive API that makes it simple to perform the file operations you need.

The API has two parts to it:

Specifying which files and directories to process

Specifying what to do with them

The *File paths in depth* section covers the first of these in detail, while subsequent sections, like *File copying in depth*, cover the second. To begin with, we'll show you examples of the most common scenarios that users encounter.

§

## Copying a single file

You copy a file by creating an instance of Gradle's builtin `Copy` task and configuring it with the location of the file and where you want to put it. This example mimics copying a generated report into a directory that will be packed into an archive, such as a ZIP or TAR:

**Example 123. How to copy a single file**

**build.gradle**

```
task copyReport(type: Copy) {  
    from file("${buildDir}/reports/my-report.pdf")  
    into file("${buildDir}/toArchive")  
}
```

The `Project.file(java.lang.Object)` method is used to create a file or directory path relative to the current project and is a common way to make build scripts work regardless of the project path. The file and directory paths are then used to specify what file to copy using `Copy.from(java.lang.Object[])` and which directory to copy it to using `Copy.into(java.lang.Object)`.

You can even use the path directly without the `file()` method, as explained early in the section *File copying in depth*:

### Example 124. Using implicit string paths

**build.gradle**

```
task copyReport2(type: Copy) {
    from "${buildDir}/reports/my-report.pdf"
    into "${buildDir}/toArchive"
}
```

Although hard-coded paths make for simple examples, they also make the build brittle. It's better to use a reliable, single source of truth, such as a task or shared project property. In the following modified example, we use a report task defined elsewhere that has the report's location stored in its `outputFile` property:

### Example 125. Prefer task/project properties over hard-coded paths

**build.gradle**

```
task copyReport3(type: Copy) {
    from myReportTask.outputFile
    into archiveReportsTask.dirToArchive
}
```

We have also assumed that the reports will be archived by `archiveReportsTask`, which provides us with the directory that will be archived and hence where we want to put the copies of the reports.

§

## Copying multiple files

You can extend the previous examples to multiple files very easily by providing multiple arguments to `from()`:

### Example 126. Using multiple arguments with `from()`

**build.gradle**

```
task copyReportsForArchiving(type: Copy) {
    from "${buildDir}/reports/my-report.pdf", "src/docs/manual.pdf"
    into "${buildDir}/toArchive"
}
```

Two files are now copied into the archive directory. You can also use multiple `from()` statements to do the same thing, as shown in the first example of the section *File copying in depth*.

Now consider another example: what if you want to copy all the PDFs in a directory without having to specify each one? To do this, attach inclusion and/or exclusion patterns to the copy specification. Here we use a string pattern to include PDFs only:


### Example 127. Using a flat filter

#### build.gradle

```
task copyPdfReportsForArchiving(type: Copy) {  
    from "${buildDir}/reports"  
    include "*.pdf"  
    into "${buildDir}/toArchive"  
}
```

One thing to note, as demonstrated in the following diagram, is that only the PDFs that reside directly in the `reports` directory are copied:

Figure 10. The effect of a flat filter on copying

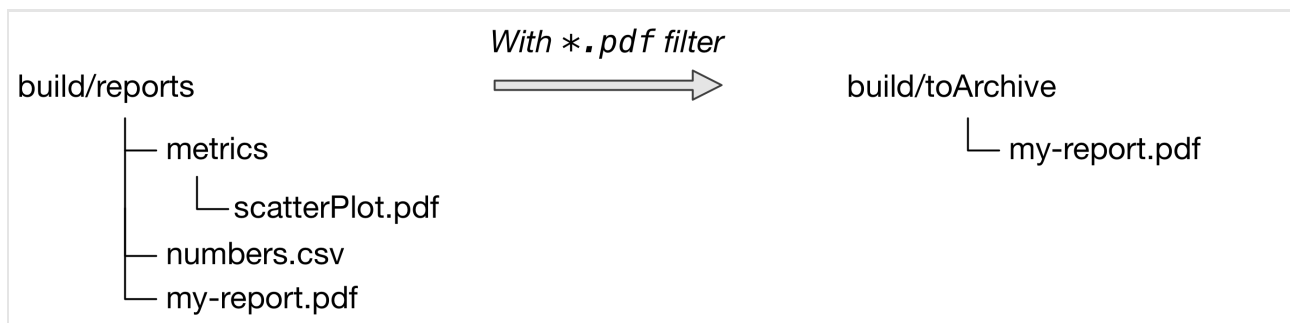

You can include files in subdirectories by using an Ant-style glob pattern (`**/*`), as done in this updated example:


### Example 128. Using a deep filter

#### build.gradle

```
task copyAllPdfReportsForArchiving(type: Copy) {  
    from "${buildDir}/reports"  
    include "**/*.pdf"  
    into "${buildDir}/toArchive"  
}
```

This task has the following effect:

Figure 11. The effect of a deep filter on copying

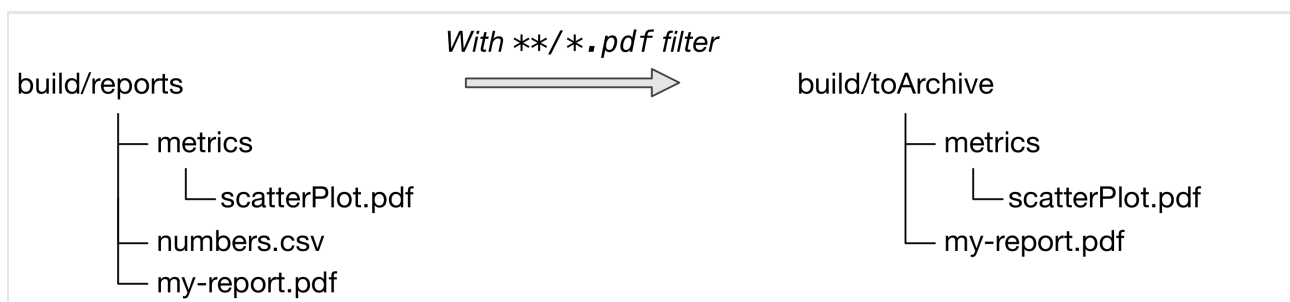

One thing to bear in mind is that a deep filter like this has the side effect of copying the directory structure

below `reports` as well as the files. If you just want to copy the files without the directory structure, you need to use an explicit `fileTree(dir) { includes }.files` expression. We talk more about the difference between file trees and file collections in the *File trees* section.

This is just one of the variations in behavior you're likely to come across when dealing with file operations in Gradle builds. Fortunately, Gradle provides elegant solutions to almost all those use cases. Read the *in-depth* sections later in the chapter for more detail on how the file operations work in Gradle and what options you have for configuring them.

## §

### Copying directory hierarchies

You may have a need to copy not just files, but the directory structure they reside in as well. This is the default behavior when you specify a directory as the `from()` argument, as demonstrated by the following example that copies everything in the `reports` directory, including all its subdirectories, to the destination:

#### Example 129. Copying an entire directory

**build.gradle**

```
task copyReportsDirForArchiving(type: Copy) {
    from "${buildDir}/reports"
    into "${buildDir}/toArchive"
}
```

The key aspect that users struggle with is controlling how much of the directory structure goes to the destination. In the above example, do you get a `toArchive/reports` directory or does everything in `reports` go straight into `toArchive`? The answer is the latter. If a directory is part of the `from()` path, then it *won't* appear in the destination.

So how do you ensure that `reports` itself is copied across, but not any other directory in `$buildDir`? The answer is to add it as an include pattern:

#### Example 130. Copying an entire directory, including itself

**build.gradle**

```
task copyReportsDirForArchiving2(type: Copy) {
    from("${buildDir}") {
        include "reports/**"
    }
    into "${buildDir}/toArchive"
}
```

You'll get the same behavior as before except with one extra level of directory in the destination, i.e. `toArch:`.

One thing to note is how the `include()` directive applies only to the `from()`, whereas the directive in the previous section applied to the whole task. These different levels of granularity in the copy specification allow



you to easily handle most requirements that you will come across. You can learn more about this in the section on *child specifications*.

§

## Creating archives (zip, tar, etc.)

From the perspective of Gradle, packing files into an archive is effectively a copy in which the destination is the archive file rather than a directory on the file system. This means that creating archives looks a lot like copying, with all of the same features!

The simplest case involves archiving the entire contents of a directory, which this example demonstrates by creating a ZIP of the `toArchive` directory:

### Example 131. Archiving a directory as a ZIP

**build.gradle**

```
task packageDistribution(type: Zip) {
    archiveName = "my-distribution.zip"
    destinationDir = file("${buildDir}/dist")

    from "${buildDir}/toArchive"
}
```

Notice how we specify the destination and name of the archive instead of an `into()`: both are required. You often won't see them explicitly set, because most projects apply the Base Plugin. It provides some conventional values for those properties. The next example demonstrates this and you can learn more about the conventions in the archive naming section.

Each type of archive has its own task type, the most common ones being [Zip](#), [Tar](#) and [Jar](#). They all share most of the configuration options of `Copy`, including filtering and renaming.

One of the most common scenarios involves copying files into specified subdirectories of the archive. For example, let's say you want to package all PDFs into a `docs` directory in the root of the archive. This `docs` directory doesn't exist in the source location, so you have to create it as part of the archive. You do this by adding an `into()` declaration for just the PDFs:

### Example 132. Using the Base Plugin for its archive name convention

```
build.gradle
plugins {
    id 'base'
}

version = "1.0.0"

task packageDistribution(type: Zip) {
    from("${buildDir}/toArchive") {
        exclude "**/*.pdf"
    }

    from("${buildDir}/toArchive") {
        include "**/*.pdf"
        into "docs"
    }
}
```

As you can see, you can have multiple `from()` declarations in a copy specification, each with its own configuration. See *the section called “Using child specifications”* for more information on this feature.

§

## Unpacking archives

Archives are effectively self-contained file systems, so unpacking them is a case of copying the files from that file system onto the local file system — or even into another archive. Gradle enables this by providing some wrapper functions that make archives available as hierarchical collections of files (file trees).

The two functions of interest are `Project.zipTree(java.lang.Object)` and `Project.tarTree(java.lang.Object)`, which produce a `FileTree` from a corresponding archive file. That file tree can then be used in a `from()` specification, like so:

### Example 133. Unpacking a ZIP file

```
build.gradle
task unpackFiles(type: Copy) {
    from zipTree("src/resources/thirdPartyResources.zip")
    into "${buildDir}/resources"
}
```

As with a normal copy, you can control which files are unpacked via filters and even rename files as they are unpacked.

If you're a Java developer and are wondering why there is no `jarTree()` method, that's because `zipTree()` works perfectly well for JARs, WARs and EARs.

## §

### Creating "uber" or "fat" JARs

In the Java space, applications and their dependencies typically used to be packaged as separate JARs within a single distribution archive. That still happens, but there is another approach that is now common: placing the classes and resources of the dependencies directly into the application JAR, creating what is known as an uber or fat JAR.

Gradle makes this approach easy to accomplish. Consider the aim: to copy the contents of other JAR files into the application JAR. All you need for this is the `Project.zipTree(java.lang.Object)` method and the `Jar` task, as demonstrated by the `uberJar` task in the following example:

#### Example 134. Creating a Java uber or fat JAR

##### build.gradle

```
plugins {
    id 'java'
}

version = '1.0.0'

repositories {
    mavenCentral()
}

dependencies {
    implementation 'commons-io:commons-io:2.6'
}

task uberJar(type: Jar) {
    appendix = 'uber'

    from sourceSets.main.output
    from configurations.runtimeClasspath.
        findAll { it.name.endsWith('jar') }.
        collect { zipTree(it) }
}
```

In this case, we're taking the runtime dependencies of the project — `configurations.runtimeClasspath` — and wrapping each of the JAR files with the `zipTree()` method. The result is a collection of ZIP file trees, the contents of which are copied into the uber JAR alongside the application classes.

§

## Creating directories

Many tasks need to create directories to store the files they generate, which is why Gradle automatically manages this aspect of tasks when they explicitly define file and directory outputs. You can learn about this feature in the incremental build section of the user guide. All core Gradle tasks ensure that any output directories they need are created if necessary using this mechanism.

In cases where you need to create a directory manually, you can use the `Project.mkdir(java.lang.Object)` method from within your build scripts or custom task implementations. Here's a simple example that creates a single `images` directory in the project folder:

### Example 135. Manually creating a directory

**build.gradle**

```
task ensureDirectory {
    doLast {
        mkdir "images"
    }
}
```

As described in the Apache Ant manual, the `mkdir` task will automatically create all necessary directories in the given path and will do nothing if the directory already exists.

§

## Moving files and directories

Gradle has no API for moving files and directories around, but you can use the Apache Ant integration to easily do that, as shown in this example:

### Example 136. Moving a directory using the Ant task

**build.gradle**

```
task moveReports {
    doLast {
        ant.move file: "${buildDir}/reports",
                todir: "${buildDir}/toArchive"
    }
}
```

This is not a common requirement and should be used sparingly as you lose information and can easily break a build. It's generally preferable to copy directories and files instead.

## §

### Renaming files on copy

The files used and generated by your builds sometimes don't have names that suit, in which case you want to rename those files as you copy them. Gradle allows you to do this as part of a copy specification using the `rename()` configuration.

The following example removes the "-staging-" marker from the names of any files that have it:

#### Example 137. Renaming files as they are copied

##### build.gradle

```
task copyFromStaging(type: Copy) {
    from "src/main/webapp"
    into "${buildDir}/explodedWar"

    rename '(.+)-staging(.+)', '$1$2'
}
```

You can use regular expressions for this, as in the above example, or closures that use more complex logic to determine the target filename. For example, the following task truncates filenames:

#### Example 138. Truncating filenames as they are copied

##### build.gradle

```
task copyWithTruncate(type: Copy) {
    from "${buildDir}/reports"
    rename { String filename ->
        if (filename.size() > 10) {
            return filename[0..7] + "~" + filename.size()
        }
        else return filename
    }
    into "${buildDir}/toArchive"
}
```

As with filtering, you can also apply renaming to a subset of files by configuring it as part of a child specification on a `from()`.

## §

### Deleting files and directories

You can easily delete files and directories using either the `Delete` task or the `Project.delete(org.gradle.api.Action)` method. In both cases, you specify which files and directories to delete in a way supported by the `Project.files(java.lang.Object[])`, `ProjectLayout.files(java.lang.Object[])`, and `ProjectLayout.configurableFiles(java.lang.Object[])` methods.

For example, the following task deletes the entire contents of a build's output directory:

#### Example 139. Deleting a directory

##### build.gradle

```
task myClean(type: Delete) {
    delete buildDir
}
```

If you want more control over which files are deleted, you can't use inclusions and exclusions in the same way as for copying files. Instead, you have to use the builtin filtering mechanisms of `FileCollection` and `FileTree`. The following example does just that to clear out temporary files from a source directory:

#### Example 140. Deleting files matching a specific pattern

##### build.gradle

```
task cleanTempFiles(type: Delete) {
    delete fileTree("src").matching {
        include "**/*.tmp"
    }
}
```

You'll learn more about file collections and file trees in the next section.

## §

### File paths in depth

In order to perform some action on a file, you need to know where it is, and that's the information provided by file paths. Gradle builds on the standard Java `File` class, which represents the location of a single file, and provides new APIs for dealing with collections of paths. This section shows you how to use the Gradle APIs to specify file paths for use in tasks and file operations.

But first, an important note on using hard-coded file paths in your builds.

§

## On hard-coded file paths

Many examples in this chapter use hard-coded paths as string literals. This makes them easy to understand, but it's not good practice for real builds. The problem is that paths often change and the more places you need to change them, the more likely you are to miss one and break the build.

Where possible, you should use tasks, task properties, and project properties — in that order of preference — to configure file paths. For example, if you were to create a task that packages the compiled classes of a Java application, you should aim for something like this:

### Example 141. How to minimize the number of hard-coded paths in your build

```
build.gradle
ext {
    archivesDirPath = "${buildDir}/archives"
}

task packageClasses(type: Zip) {
    appendix = "classes"
    destinationDir = file(archivesDirPath)

    from compileJava
}
```

See how we're using the `compileJava` task as the source of the files to package and we've created a project property `archivesDirPath` to store the location where we put archives, on the basis we're likely to use it elsewhere in the build.

Using a task directly as an argument like this relies on it having defined outputs, so it won't always be possible. In addition, this example could be improved further by relying on the Java plugin's convention for `destinationDir` rather than overriding it, but it does demonstrate the use of project properties.

§

## Single file paths

One of the great quandaries when developing a build is how to specify file locations when the build may be executed from an arbitrary directory — not necessarily in the project — and may be run on any number of different systems with incompatible directory layouts. The standard Java mechanism for specifying a file path runs into trouble in these situations:

`new File(relative path)` generates a path relative to the current working directory, which could be anywhere

`new File(absolute path)` will fail if the file system doesn't have the requisite path.

Gradle solves this problem by providing the `Project.file(java.lang.Object)` method, which generates a path relative to the *project* directory (unless the given path is absolute, in which case it is used

as is). Here are some examples of using the `file()` method with different types of argument:

#### Example 142. Locating files

##### **build.gradle**

```
// Using a relative path
File configFile = file('src/config.xml')

// Using an absolute path
configFile = file(configFile.absolutePath)

// Using a File object with a relative path
configFile = file(new File('src/config.xml'))

// Using a java.nio.file.Path object with a relative path
configFile = file(Paths.get('src', 'config.xml'))

// Using an absolute java.nio.file.Path object
configFile = file(Paths.get(System.getProperty('user.home')).resolve('global-confi
```

As you can see, you can pass strings, `File` instances and `Path` instances to the `file()` method, all of which result in an absolute `File` object. You can find other options for argument types in the reference guide, linked in the previous paragraph.

What happens in the case of multi-project builds? The `file()` method will always turn relative paths into paths that are relative to the current project directory, which may be a child project. If you want to use a path that's relative to the *root project* directory, then you need to use the special `Project.getRootDir()` property to construct an absolute path, like so:

#### Example 143. Creating a path relative to a parent project

##### **build.gradle**

```
File configFile = file("${rootDir}/shared/config.xml")
```

Let's say you're working on a multi-project build in a `dev/projects/AcmeHealth` directory. You use the above example in the build of the library you're fixing — at `AcmeHealth/subprojects/AcmePatientRec`. The file path will resolve to the absolute version of `dev/projects/AcmeHealth/shared/config.xml`.

The `file()` method can be used to configure any task that has a property of type `File`. Many tasks, though, work on multiple files, so we look at how to specify sets of files next.



## File collections

A *file collection* is simply a set of file paths that's represented by the `FileCollection` interface. Any file paths. It's important to understand that the file paths don't have to be related in any way, so they don't have to be in the same directory or even have a shared parent directory. You will also find that many parts of the Gradle API use `FileCollection`, such as the copying API discussed later in this chapter and dependency configurations.

The recommended way to specify a collection of files is to use the `ProjectLayout.files(java.lang.Object[])` method, which returns a `FileCollection` instance. This method is very flexible and allows you to pass multiple strings, `File` instances, collections of strings, collections of `Files`, and more. You can even pass in tasks as arguments if they have defined outputs. Learn about all the supported argument types in the reference guide.

As with the `Project.file(java.lang.Object)` method covered in the previous section, all relative paths are evaluated relative to the current project directory. The following example demonstrates some of the variety of argument types you can use — strings, `File` instances, a list and a `Path`:

### Example 144. Creating a file collection

#### **build.gradle**

```
FileCollection collection = layout.files('src/file1.txt',  
                                         new File('src/file2.txt'),  
                                         ['src/file3.csv', 'src/file4.csv'],  
                                         Paths.get('src', 'file5.txt'))
```

File collections have some important attributes in Gradle. They can be:

created lazily

iterated over

filtered

combined

*Lazy creation* of a file collection is useful when you need to evaluate the files that make up a collection at the time a build runs. In the following example, we query the file system to find out what files exist in a particular directory and then make those into a file collection:

### Example 145. Implementing a file collection

#### build.gradle

```
task list {
    doLast {
        File srcDir

        // Create a file collection using a closure
        collection = layout.files { srcDir.listFiles() }

        srcDir = file('src')
        println "Contents of $srcDir.name"
        collection.collect { relativePath(it) }.sort().each { println it }

        srcDir = file('src2')
        println "Contents of $srcDir.name"
        collection.collect { relativePath(it) }.sort().each { println it }
    }
}
```

#### Output of `gradle -q list`

```
> gradle -q list
Contents of src
src/dir1
src/file1.txt
Contents of src2
src2/dir1
src2/dir2
```

The key to lazy creation is passing a closure to the `files()` method. Your closure simply needs to return a value of a type accepted by `files()`, such as `List<File>`, `String`, `FileCollection`, etc.

*Iterating over a file collection* can be done through the `each()` method on the collection or using the collection in a `for` loop. In both approaches, the file collection is treated as a set of `File` instances, i.e. your iteration variable will be of type `File`.

The following example demonstrates such iteration as well as how you can convert file collections to other types using the `as` operator or supported properties:

### Example 146. Using a file collection

#### build.gradle

```
// Iterate over the files in the collection
collection.each { File file ->
    println file.name
}

// Convert the collection to various types
Set set = collection.files
Set set2 = collection as Set
List list = collection as List
String path = collection.asPath
File file = collection.singleFile
File file2 = collection as File

// Add and subtract collections
def union = collection + layout.files('src/file2.txt')
def difference = collection - layout.files('src/file2.txt')
```

You can also see at the end of the example *how to combine file collections* using the + and - operators to merge and subtract them. An important feature of the resulting file collections is that they are *live*. In other words, when you combine file collections in this way, the result always reflects what's currently in the source file collections, even if they change during the build.

For example, imagine `collection` in the above example gains an extra file or two after `union` is created. As long as you use `union` after those files are added to `collection`, `union` will also contain those additional files. The same goes for the `different` file collection.

Live collections are also important when it comes to *filtering*. If you want to use a subset of a file collection, you can take advantage of the `FileCollection.filter(org.gradle.api.specs.Spec)` method to determine which files to "keep". In the following example, we create a new collection that consists of only the files that end with `.txt` in the source collection:

### Example 147. Filtering a file collection

#### build.gradle

```
FileCollection textFiles = collection.filter { File f ->
    f.name.endsWith(".txt")
}
```

#### Output of `gradle -q filterTextFiles`

```
> gradle -q filterTextFiles
src/file1.txt
src/file2.txt
src/file5.txt
```


If `collection` changes at any time, either by adding or removing files from itself, then `textFiles` will immediately reflect the change because it is also a live collection. Note that the closure you pass to `filter()` takes a `File` as an argument and should return a boolean.

§

## File trees

A *file tree* is a file collection that retains the directory structure of the files it contains and has the type `FileTree`. This means that all the paths in a file tree must have a shared parent directory. The following diagram highlights the distinction between file trees and file collections in the common case of copying files:

**Figure 12. The differences in how file trees and file collections behave when copying files**

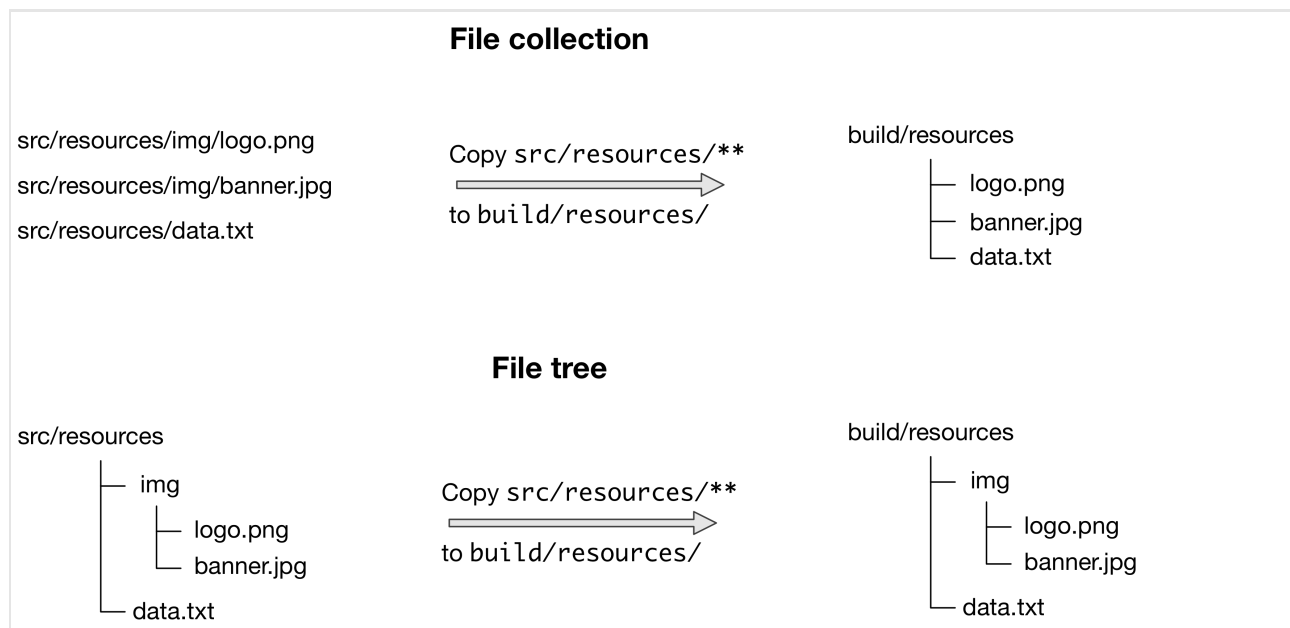

**Note:** Although `FileTree` extends `FileCollection` (an is-a relationship), their behaviors do differ. In other words, you can use a file tree wherever a file collection is required, but remember: a file collection is a flat list/set of files, while a file tree is a file and directory hierarchy. To convert a file tree to a flat collection, use the `FileTree.GetFiles()` property.

The simplest way to create a file tree is to pass a file or directory path to the `Project.fileTree(java.lang.Object)` method. This will create a tree of all the files and directories in that base directory (but not the base directory itself). The following example demonstrates how to use the basic method and, in addition, how to filter the files and directories using Ant-style patterns:

## Example 148. Creating a file tree

### build.gradle

```
// Create a file tree with a base directory
FileTree tree = fileTree(dir: 'src/main')

// Add include and exclude patterns to the tree
tree.include '**/*.java'
tree.exclude '**/Abstract*'

// Create a tree using path
tree = fileTree('src').include('**/*.java')

// Create a tree using closure
tree = fileTree('src') {
    include '**/*.java'
}

// Create a tree using a map
tree = fileTree(dir: 'src', include: '**/*.java')
tree = fileTree(dir: 'src', includes: ['**/*.java', '**/*.xml'])
tree = fileTree(dir: 'src', include: '**/*.java', exclude: '**/test/**')
```

You can see more examples of supported patterns in the API docs for [PatternFilterable](#). Also, see the API documentation for `fileTree()` to see what types you can pass as the base directory.

**Note:** By default, `fileTree()` returns a `FileTree` instance that applies some default exclusion patterns for convenience — the same defaults as Ant in fact. For the complete default exclusion list, see the Ant manual.

If those default exclusions prove problematic, you can workaround the issue by using the `defaultexclude` Ant task, as demonstrated in this example:

### Example 149. Changing Ant default exclusions for a copy task

#### Note: build.gradle

```
task forcedCopy(type: Copy) {  
    into "${buildDir}/inPlaceApp"  
    from 'src/main/webapp'  
  
    doFirst {  
        ant.defaultexcludes remove: "**/.git"  
        ant.defaultexcludes remove: "**/.git/**"  
        ant.defaultexcludes remove: "**/*~"  
    }  
  
    doLast {  
        ant.defaultexcludes default: true  
    }  
}
```

In general, it's best to ensure that the default exclusions are reset whenever you change them as modifications are visible to the entire build. The above example is performing such a reset in its `doLast` action.

You can do many of the same things with file trees that you can with file collections:

iterate over them (depth first)

filter them (using `FileTree.matching(org.gradle.api.Action)` and Ant-style patterns)

merge them

You can also traverse file trees using the `FileTree.visit(org.gradle.api.Action)` method. All of these techniques are demonstrated in the following example:

### Example 150. Using a file tree

#### build.gradle

```
// Iterate over the contents of a tree
tree.each {File file ->
    println file
}

// Filter a tree
FileTree filtered = tree.matching {
    include 'org/gradle/api/**'
}

// Add trees together
FileTree sum = tree + fileTree(dir: 'src/test')

// Visit the elements of the tree
tree.visit {element ->
    println "$element.relativePath => $element.file"
}
```

We've discussed how to create your own file trees and file collections, but it's also worth bearing in mind that many Gradle plugins provide their own instances of file trees, such as Java's source sets. These can be used and manipulated in exactly the same way as the file trees you create yourself.

Another specific type of file tree that users commonly need is the archive, i.e. ZIP files, TAR files, etc. We look at those next.

§

#### Using archives as file trees

An archive is a directory and file hierarchy packed into a single file. In other words, it's a special case of a file tree, and that's exactly how Gradle treats archives. Instead of using the `fileTree()` method, which only works on normal file systems, you use the `Project.zipTree(java.lang.Object)` and `Project.tarTree(java.lang.Object)` methods to wrap archive files of the corresponding type (note that JAR, WAR and EAR files are ZIPs). Both methods return `FileTree` instances that you can then use in the same way as normal file trees. For example, you can extract some or all of the files of an archive by copying its contents to some directory on the file system. Or you can merge one archive into another.

Here are some simple examples of creating archive-based file trees:

### Example 151. Using an archive as a file tree

#### build.gradle

```
// Create a ZIP file tree using path
FileTree zip = zipTree('someFile.zip')

// Create a TAR file tree using path
FileTree tar = tarTree('someFile.tar')

//tar tree attempts to guess the compression based on the file extension
//however if you must specify the compression explicitly you can:
FileTree someTar = tarTree(resources.gzip('someTar.ext'))
```

You can see a practical example of extracting an archive file in among the common scenarios we cover.

§

### Understanding implicit conversion to file collections

Many objects in Gradle have properties which accept a set of input files. For example, the [JavaCompile](#) task has a `source` property that defines the source files to compile. You can set the value of this property using any of the types supported by the `files()` method, as mentioned in the api docs. This means you can, for example, set the property to a `File`, `String`, `collection`, `FileCollection` or even a closure.

**This is a feature of specific tasks!** That means implicit conversion will not happen for just any task that has a `FileCollection` or `FileTree` property. If you want to know whether implicit conversion happens in a particular situation, you will need to read the relevant documentation, such as the corresponding task's API docs. Alternatively, you can remove all doubt by explicitly using [ProjectLayout.files\(java.lang.Object\[\]\)](#) in your build.

Here are some examples of the different types of arguments that the `source` property can take:



### Example 152. Specifying a set of files

#### **build.gradle**

```
task compile(type: JavaCompile)

// Use a File object to specify the source directory
compile {
    source = file('src/main/java')
}

// Use a String path to specify the source directory
compile {
    source = 'src/main/java'
}

// Use a collection to specify multiple source directories
compile {
    source = ['src/main/java', '../shared/java']
}

// Use a FileCollection (or FileTree in this case) to specify the source files
compile {
    source = fileTree(dir: 'src/main/java').matching { include 'org/gradle/api/*'
}

// Using a closure to specify the source files.
compile {
    source = {
        // Use the contents of each zip file in the src dir
        file('src').listFiles().findAll {it.name.endsWith('.zip')}.collect { zip'
    }
}
```

One other thing to note is that properties like `source` have corresponding methods in core Gradle tasks. Those methods follow the convention of *appending* to collections of values rather than replacing them. Again, this method accepts any of the types supported by the `files()` method, as shown here:

### Example 153. Appending a set of files

#### build.gradle

```
compile {  
    // Add some source directories use String paths  
    source 'src/main/java', 'src/main/groovy'  
  
    // Add a source directory using a File object  
    source file('../shared/java')  
  
    // Add some source directories using a closure  
    source { file('src/test/').listFiles() }  
}
```

As this is a common convention, we recommend that you follow it in your own custom tasks. Specifically, if you plan to add a method to configure a collection-based property, make sure the method appends rather than replaces values.

## §

### File copying in depth

The basic process of copying files in Gradle is a simple one:

Define a task of type `Copy`

Specify which files (and potentially directories) to copy

Specify a destination for the copied files

But this apparent simplicity hides a rich API that allows fine-grained control of which files are copied, where they go, and what happens to them as they are copied — renaming of the files and token substitution of file content are both possibilities, for example.

Let's start with the last two items on the list, which form what is known as a *copy specification*. This is formally based on the `CopySpec` interface, which the `Copy` task implements, and offers:

A `CopySpec.from(java.lang.Object[])` method to define what to copy

An `CopySpec.into(java.lang.Object)` method to define the destination

`CopySpec` has several additional methods that allow you to control the copying process, but these two are the only required ones. `into()` is straightforward, requiring a directory path as its argument in any form supported by the `Project.file(java.lang.Object)` method. The `from()` configuration is far more flexible.

Not only does `from()` accept multiple arguments, it also allows several different types of argument. For example, some of the most common types are:

A `String` — treated as a file path or, if it starts with `"file://"`, a file URI

A `File` — used as a file path

A `FileCollection` or `FileTree` — all files in the collection are included in the copy

A task — the files or directories that form a task's defined outputs are included

In fact, `from()` accepts all the same arguments as `Project.files(java.lang.Object[])`, `ProjectLayout.files(java.lang.Object[])`, and `ProjectLayout.configurableFiles(java.lang.Object[])`, so see those methods for a more detailed list of acceptable types.

Something else to consider is what type of thing a file path refers to:

A file — the file is copied as is

A directory — this is effectively treated as a file tree: everything in it, including subdirectories, is copied. However, the directory itself is not included in the copy.

A non-existent file — the path is ignored

Here is an example that uses multiple `from()` specifications, each with a different argument type. You will probably also notice that `into()` is configured lazily using a closure — a technique that also works with `from`:

#### Example 154. Specifying copy task source files and destination directory

##### **build.gradle**

```
task anotherCopyTask(type: Copy) {
    // Copy everything under src/main/webapp
    from 'src/main/webapp'
    // Copy a single file
    from 'src/staging/index.html'
    // Copy the output of a task
    from copyTask
    // Copy the output of a task using Task outputs explicitly.
    from copyTaskWithPatterns.outputs
    // Copy the contents of a Zip file
    from zipTree('src/main/assets.zip')
    // Determine the destination directory later
    into { getDestDir() }
}
```

Note that the lazy configuration of `into()` is different from a child specification, even though the syntax is similar. Keep an eye on the number of arguments to distinguish between them.

§

## Filtering files

You've already seen that you can filter file collections and file trees directly in a `Copy` task, but you can also apply filtering in any copy specification through the `CopySpec.include(java.lang.String[])` and `CopySpec.exclude(java.lang.String[])` methods.

Both of these methods are normally used with Ant-style include or exclude patterns, as described in `PatternFilterable`. You can also perform more complex logic by using a closure that takes a `FileTreeElement` and returns `true` if the file should be included or `false` otherwise. The following example demonstrates both forms, ensuring that only `.html` and `.jsp` files are copied, except for those `.html` files with the word "DRAFT" in their content:

### Example 155. Selecting the files to copy

#### **build.gradle**

```
task copyTaskWithPatterns(type: Copy) {  
    from 'src/main/webapp'  
    into "${buildDir}/explodedWar"  
    include '**/*.html'  
    include '**/*.jsp'  
    exclude { FileTreeElement details ->  
        details.file.name.endsWith('.html') &&  
            details.file.text.contains('DRAFT')  
    }  
}
```

A question you may ask yourself at this point is what happens when inclusion and exclusion patterns overlap? Which pattern wins? Here are the basic rules:

If there are no explicit inclusions or exclusions, everything is included

If at least one inclusion is specified, only files and directories matching the patterns are included

Any exclusion pattern overrides any inclusions, so if a file or directory matches at least one exclusion pattern, it won't be included, regardless of the inclusion patterns

Bear these rules in mind when creating combined inclusion and exclusion specifications so that you end up with the exact behavior you want.

Note that the inclusions and exclusions in the above example will apply to *all* `from()` configurations. If you want to apply filtering to a subset of the copied files, you'll need to use child specifications.

§

## Renaming files

The example of how to rename files on copy gives you most of the information you need to perform this operation. It demonstrates the two options for renaming:

Using a regular expression

Using a closure

Regular expressions are a flexible approach to renaming, particularly as Gradle supports regex groups that allow you to remove and replaces parts of the source filename. The following example shows how you can remove the string "-staging-" from any filename that contains it using a simple regular expression:

#### Example 156. Renaming files as they are copied

##### build.gradle

```
task rename(type: Copy) {
    from 'src/main/webapp'
    into "${buildDir}/explodedWar"
    // Use a closure to convert all file names to upper case
    rename { String fileName ->
        fileName.toUpperCase()
    }
    // Use a regular expression to map the file name
    rename '(.+)-staging-(.+)', '$1$2'
    rename(/(.+)-staging-(.+)/, '$1$2')
}
```

You can use any regular expression supported by the Java `Pattern` class and the substitution string (the second argument of `rename()`) works on the same principles as the `Matcher.appendReplacement()` method.

#### Regular expressions in Groovy build scripts

There are two common issues people come across when using regular expressions in this context:

1. **Note:** If you use a slashy string (those delimited by '/') for the first argument, you *must* include the parentheses for `rename()` as shown in the above example.
2. **Note:** It's safest to use single quotes for the second argument, otherwise you need to escape the '\$' in group substitutions, i.e. `"\ $1\ $2"`

The first is a minor inconvenience, but slashy strings have the advantage that you don't have to escape backslash ('\') characters in the regular expression. The second issue stems from Groovy's support for embedded expressions using `${ }` syntax in double-quoted and slashy strings.

The closure syntax for `rename()` is straightforward and can be used for any requirements that simple regular expressions can't handle. You're given the name of a file and you return a new name for that file, or `null` if you don't want to change the name. Do be aware that the closure will be executed for every file that's copied, so try to avoid expensive operations where possible.

§

## Filtering file content (token substitution, templating, etc.)

Not to be confused with filtering which files are copied, *file content filtering* allows you to transform the content of files while they are being copied. This can involve basic templating that uses token substitution, removal of lines of text, or even more complex filtering using a full-blown template engine.

The following example demonstrates several forms of filtering, including token substitution using the `CopySpec.expand(java.util.Map)` method and another using `CopySpec.filter(java.lang.Class)` with an Ant filter:

### Example 157. Filtering files as they are copied

#### build.gradle

```
import org.apache.tools.ant.filters.FixCrLfFilter
import org.apache.tools.ant.filters.ReplaceTokens

task filter(type: Copy) {
    from 'src/main/webapp'
    into "${buildDir}/explodedWar"
    // Substitute property tokens in files
    expand(copyright: '2009', version: '2.3.1')
    expand(project.properties)
    // Use some of the filters provided by Ant
    filter(FixCrLfFilter)
    filter(ReplaceTokens, tokens: [copyright: '2009', version: '2.3.1'])
    // Use a closure to filter each line
    filter { String line ->
        "[$line]"
    }
    // Use a closure to remove lines
    filter { String line ->
        line.startsWith('-') ? null : line
    }
    filteringCharset = 'UTF-8'
}
```

The `filter()` method has two variants, which behave differently:

one takes a `FilterReader` and is designed to work with Ant filters, such as `ReplaceTokens`

one takes a closure or `Transformer` that defines the transformation for each line of the source file

Note that both variants assume the source files are text based. When you use the `ReplaceTokens` class with `filter()`, the result is a template engine that replaces tokens of the form `@tokenName@` (the Ant-style token) with values that you define.

The `expand()` method treats the source files as Groovy templates, which evaluate and expand expressions

of the form `${expression}`. You can pass in property names and values that are then expanded in the source files. `expand()` allows for more than basic token substitution as the embedded expressions are full-blown Groovy expressions.

**Note:** It's good practice to specify the character set when reading and writing the file, otherwise the transformations won't work properly for non-ASCII text. You configure the character set with the `CopySpec.getFilteringCharset()` property. If it's not specified, the JVM default character set is used, which is likely to be different from the one you want.

§

## Using the `CopySpec` class

A copy specification (or copy spec for short) determines what gets copied to where, and what happens to files during the copy. You've already seen many examples in the form of configuration for `Copy` and archiving tasks. But copy specs have two attributes that are worth covering in more detail:

They can be independent of tasks

They are hierarchical

The first of these attributes allows you to *share copy specs within a build*. The second provides fine-grained control within the overall copy specification.

§

## Sharing copy specs

Consider a build that has several tasks that copy a project's static website resources or add them to an archive. One task might copy the resources to a folder for a local HTTP server and another might package them into a distribution. You could manually specify the file locations and appropriate inclusions each time they are needed, but human error is more likely to creep in, resulting in inconsistencies between tasks.

One solution Gradle provides is the `Project.copySpec(org.gradle.api.Action)` method. This allows you to create a copy spec outside of a task, which can then be attached to an appropriate task using the `CopySpec.with(org.gradle.api.file.CopySpec[])` method. The following example demonstrates how this is done:

## Example 158. Sharing copy specifications

### build.gradle

```
CopySpec webAssetsSpec = copySpec {
    from 'src/main/webapp'
    include '**/*.html', '**/*.png', '**/*.jpg'
    rename '(.+)-staging(.+)', '$1$2'
}

task copyAssets(type: Copy) {
    into "${buildDir}/inPlaceApp"
    with webAssetsSpec
}

task distApp(type: Zip) {
    archiveName = 'my-app-dist.zip'
    destinationDir = file("${buildDir}/dists")

    from appClasses
    with webAssetsSpec
}
```

Both the `copyAssets` and `distApp` tasks will process the static resources under `src/main/webapp`, as specified by `webAssetsSpec`.

**Note:** The configuration defined by `webAssetsSpec` will *not* apply to the app classes included by the `distApp` task. That's because `from appClasses` is its own child specification independent of `with`.

This can be confusing to understand, so it's probably best to treat `with()` as an extra `from()` specification in the task. Hence it doesn't make sense to define a standalone copy spec without at least one `from()` defined.

If you encounter a scenario in which you want to apply the same copy configuration to *different* sets of files, then you can share the configuration block directly without using `copySpec()`. Here's an example that has two independent tasks that happen to want to process image files only:



### Example 159. Sharing copy patterns only

#### build.gradle

```
def webAssetPatterns = {
    include '**/*.html', '**/*.png', '**/*.jpg'
}

task copyAppAssets(type: Copy) {
    into "${buildDir}/inPlaceApp"
    from 'src/main/webapp', webAssetPatterns
}

task archiveDistAssets(type: Zip) {
    archiveName = 'distribution-assets.zip'
    destinationDir = file("${buildDir}/dists")

    from 'distResources', webAssetPatterns
}
```


In this case, we assign the copy configuration to its own variable and apply it to whatever `from()` specification we want. This doesn't just work for inclusions, but also exclusions, file renaming, and file content filtering.

§

Using child specifications

If you only use a single copy spec, the file filtering and renaming will apply to *all* the files that are copied. Sometimes this is what you want, but not always. Consider the following example that copies files into a directory structure that can be used by a Java Servlet container to deliver a website:

**Figure 13. Creating an exploded WAR for a Servlet container**

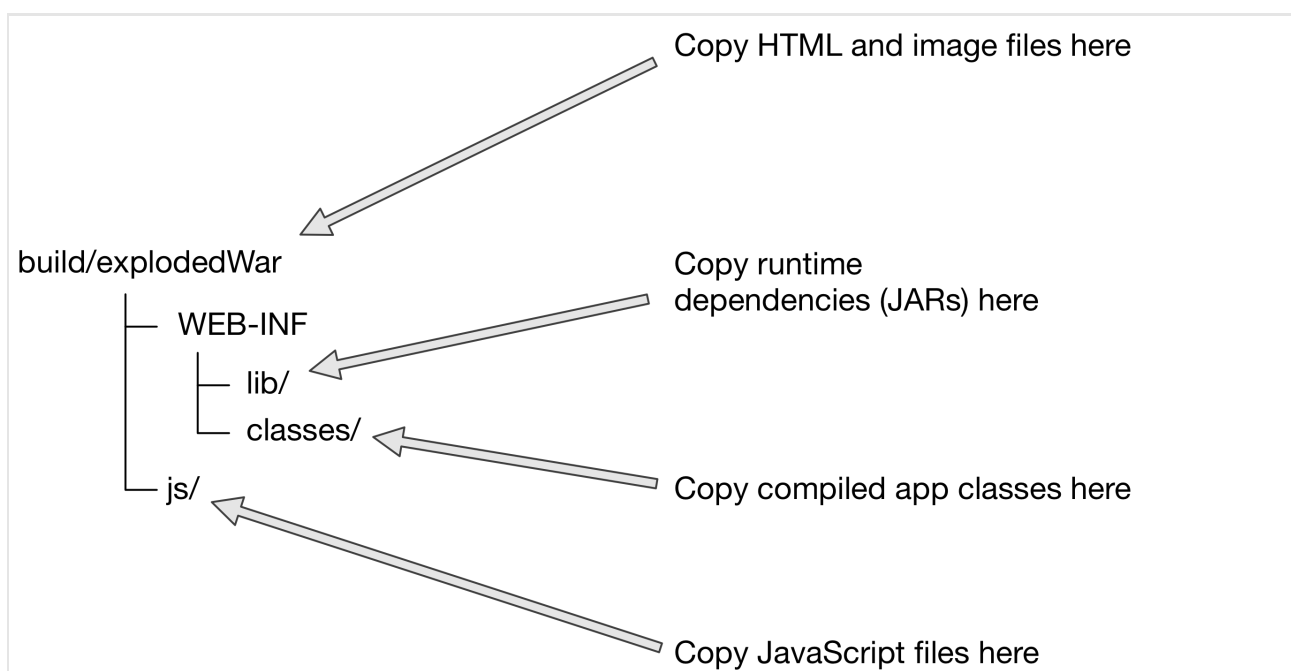

This is not a straightforward copy as the `WEB-INF` directory and its subdirectories don't exist within the project, so they must be created during the copy. In addition, we only want HTML and image files going directly into the root folder — `build/explodedWar` — and only JavaScript files going into the `js` directory. So we need separate filter patterns for those two sets of files.

The solution is to use *child specifications*, which can be applied to both `from()` and `into()` declarations. The following task definition does the necessary work:

#### Example 160. Nested copy specs

##### **build.gradle**

```
task nestedSpecs(type: Copy) {
    into "${buildDir}/explodedWar"
    exclude '**/*staging*'
    from('src/dist') {
        include '**/*.html', '**/*.png', '**/*.jpg'
    }
    from(sourceSets.main.output) {
        into 'WEB-INF/classes'
    }
    into('WEB-INF/lib') {
        from configurations.runtimeClasspath
    }
}
```

Notice how the `src/dist` configuration has a nested inclusion specification: that's the child copy spec. You can of course add content filtering and renaming here as required. A child copy spec is still a copy spec.

The above example also demonstrates how you can copy files into a subdirectory of the destination either by using a child `into()` on a `from()` or a child `from()` on an `into()`. Both approaches are acceptable, but you may want to create and follow a convention to ensure consistency across your build files.

**Note:** Don't get your `into()` specifications mixed up! For a normal copy — one to the filesystem rather than an archive — there should always be *one* "root" `into()` that simply specifies the overall destination directory of the copy. Any other `into()` should have a child spec attached and its path will be relative to the root `into()`.

One final thing to be aware of is that a child copy spec inherits its destination path, include patterns, exclude patterns, copy actions, name mappings and filters from its parent. So be careful where you place your configuration.

§

## Copying files in your own tasks

There might be occasions when you want to copy files or directories as *part* of a task. For example, a custom archiving task based on an unsupported archive format might want to copy files to a temporary directory before they are then archived. You still want to take advantage of Gradle's copy API, but without introducing an extra `Copy` task.

The solution is to use the `Project.copy(org.gradle.api.Action)` method. It works the same way as the `Copy` task by configuring it with a copy spec. Here's a trivial example:

### Example 161. Copying files using the `copy()` method without up-to-date check

**build.gradle**

```
task copyMethod {
    doLast {
        copy {
            from 'src/main/webapp'
            into "${buildDir}/explodedWar"
            include '**/*.html'
            include '**/*.jsp'
        }
    }
}
```

The above example demonstrates the basic syntax and also highlights two major limitations of using the `copy` method:

The `copy()` method is not incremental. The example's `copyMethod` task will *always* execute because it has no information about what files make up the task's inputs. You have to manually define the task inputs and outputs.

Using a task as a copy source, i.e. as an argument to `from()`, won't set up an automatic task dependency between your task and that copy source. As such, if you are using the `copy()` method as part of a task action, you must explicitly declare all inputs and outputs in order to get the correct behavior.

The following example shows you how to workaround these limitations by using the dynamic API for task inputs and outputs:

### Example 162. Copying files using the `copy()` method with up-to-date check

#### build.gradle

```
task copyMethodWithExplicitDependencies{
    // up-to-date check for inputs, plus add copyTask as dependency
    inputs.files copyTask
    outputs.dir 'some-dir' // up-to-date check for outputs
    doLast{
        copy {
            // Copy the output of copyTask
            from copyTask
            into 'some-dir'
        }
    }
}
```

These limitations make it preferable to use the `Copy` task wherever possible, because of its builtin support for incremental building and task dependency inference. That is why the `copy()` method is intended for use by custom tasks that need to copy files as part of their function. Custom tasks that use the `copy()` method should declare the necessary inputs and outputs relevant to the copy action.

§

#### Mirroring directories and file collections with the `Sync` task

The `Sync` task, which extends the `Copy` task, copies the source files into the destination directory and then removes any files from the destination directory which it did not copy. In other words, it synchronizes the contents of a directory with its source. This can be useful for doing things such as installing your application, creating an exploded copy of your archives, or maintaining a copy of the project's dependencies.

Here is an example which maintains a copy of the project's runtime dependencies in the `build/libs` directory.

### Example 163. Using the `Sync` task to copy dependencies

#### build.gradle

```
task libs(type: Sync) {
    from configurations.runtime
    into "${buildDir}/libs"
}
```

You can also perform the same function in your own tasks with the `Project.sync(org.gradle.api.Action)` method.

§

## Archive creation in depth

Archives are essentially self-contained file systems and Gradle treats them as such. This is why working with archives is very similar to working with files and directories, including such things as file permissions.

Out of the box, Gradle supports creation of both ZIP and TAR archives, and by extension Java's JAR, WAR and EAR formats — Java's archive formats are all ZIPs. Each of these formats has a corresponding task type to create them: `Zip`, `Tar`, `Jar`, `War`, and `Ear`. These all work the same way and are based on copy specifications, just like the `Copy` task.

Creating an archive file is essentially a file copy in which the destination is implicit, i.e. the archive file itself. Here's a basic example that specifies the path and name of the target archive file:

### Example 164. Archiving a directory as a ZIP

**build.gradle**

```
task packageDistribution(type: Zip) {
    archiveName = "my-distribution.zip"
    destinationDir = file("${buildDir}/dist")

    from "${buildDir}/toArchive"
}
```

In the next section you'll learn about convention-based archive names, which can save you from always configuring the destination directory and archive name.

The full power of copy specifications are available to you when creating archives, which means you can do content filtering, file renaming or anything else that is covered in the previous section. A particularly common requirement is copying files into subdirectories of the archive that don't exist in the source folders, something that can be achieved with `into()` child specifications.

Gradle does of course allow you create as many archive tasks as you want, but it's worth bearing in mind that many convention-based plugins provide their own. For example, the Java plugin adds a `jar` task for packaging a project's compiled classes and resources in a JAR. Many of these plugins provide sensible conventions for the names of archives as well as the copy specifications used. We recommend you use these tasks wherever you can, rather than overriding them with your own.

§

## Archive naming

Gradle has several conventions around the naming of archives and where they are created based on the plugins your project uses. The main convention is provided by the Base Plugin, which defaults to creating archives in the `$buildDir/distributions` directory and typically uses archive names of the form `[projectName]-[version].[type]`.

The following example comes from a project named 'zipProject', hence the `myZip` task creates an archive

named 'zipProject-1.0.zip':

#### Example 165. Creation of ZIP archive

##### build.gradle

```
plugins {  
    id 'base'  
}  
  
version = 1.0  
  
task myZip(type: Zip) {  
    from 'somedir'  
  
    doLast {  
        println archiveName  
        println relativePath(destinationDir)  
        println relativePath.archivePath  
    }  
}
```

##### Output of `gradle -q myZip`

```
> gradle -q myZip  
zipProject-1.0.zip  
build/distributions  
build/distributions/zipProject-1.0.zip
```

Note that the name of the archive does *not* derive from the name of the task that creates it.

If you want to change the name and location of a generated archive file, you can provide values for the `archiveName` and `destinationDir` properties of the corresponding task. These override any conventions that would otherwise apply.

Alternatively, you can make use of the default archive name pattern provided by `AbstractArchiveTask.getArchiveName()`: `[baseName]-[appendix]-[version]-[classifier].[extension]`. You can set each of these properties on the task separately if you wish. Note that the Base Plugin uses the convention of project name for `baseName`, project version for `version` and the archive type for `extension`. It does not provide values for the other properties.

This example — from the same project as the one above — configures just the `baseName` property, overriding the default value of the project name:

### Example 166. Configuration of archive task - custom archive name

#### build.gradle

```
task myCustomZip(type: Zip) {  
    baseName = 'customName'  
    from 'somedir'  
  
    doLast {  
        println archiveName  
    }  
}
```

#### Output of `gradle -q myCustomZip`

```
> gradle -q myCustomZip  
customName-1.0.zip
```

You can also override the default `baseName` value for *all* the archive tasks in your build by using the *project* property `archivesBaseName`, as demonstrated by the following example:

### Example 167. Configuration of archive task - appendix & classifier

#### build.gradle

```
plugins {  
    id 'base'  
}  
  
version = 1.0  
archivesBaseName = "gradle"  
  
task myZip(type: Zip) {  
    from 'somedir'  
}  
  
task myOtherZip(type: Zip) {  
    appendix = 'wrapper'  
    classifier = 'src'  
    from 'somedir'  
}  
  
task echoNames {  
    doLast {  
        println "Project name: ${project.name}"  
        println myZip.archiveName  
        println myOtherZip.archiveName  
    }  
}
```

#### Output of `gradle -q echoNames`

```
> gradle -q echoNames  
Project name: zipProject  
gradle-1.0.zip  
gradle-wrapper-1.0-src.zip
```

You can find all the possible archive task properties in the API documentation for [AbstractArchiveTask](#), but we have also summarized the main ones here:

**archiveName** — *String*, **default:** *baseName-appendix-version-classifier.extension*

The complete file name of the generated archive. If any of the properties in the default value are empty, their '-' separator is dropped.

**archivePath** — *File*, **read-only**, **default:** *destinationDir/archiveName*

The absolute file path of the generated archive.

**destinationDir** — *File*, **default:** *depends on archive type*

The target directory in which to put the generated archive. By default, JARs and WARs go into `$buildDir`. ZIPs and TARs go into `$buildDir/distributions`.



**baseName** — `String`, default: `project.name`

The base name portion of the archive file name, typically a project name or some other descriptive name for what it contains.

**appendix** — `String`, default: `null`

The appendix portion of the archive file name that comes immediately after the base name. It is typically used to distinguish between different forms of content, such as code and docs, or a minimal distribution versus a full or complete one.

**version** — `String`, default: `project.version`

The version portion of the archive file name, typically in the form of a normal project or product version.

**classifier** — `String`, default: `null`

The classifier portion of the archive file name. Often used to distinguish between archives that target different platforms.

**extension** — `String`, default: **depends on archive type and compression type**

The filename extension for the archive. By default, this is set based on the archive task type and the compression type (if you're creating a TAR). Will be one of: `zip`, `jar`, `war`, `tar`, `tgz` or `tbz2`. You can of course set this to a custom extension if you wish.

§

## Sharing content between multiple archives

As described earlier, you can use the `Project.copySpec(org.gradle.api.Action)` method to share content between archives.

§

## Reproducible archives

Sometimes it's desirable to recreate archives exactly the same, byte for byte, on different machines. You want to be sure that building an artifact from source code produces the same result no matter when and where it is built. This is necessary for projects like `reproducible-builds.org`.

Reproducing the same byte-for-byte archive poses some challenges since the order of the files in an archive is influenced by the underlying file system. Each time a ZIP, TAR, JAR, WAR or EAR is built from source, the order of the files inside the archive may change. Files that only have a different timestamp also causes differences in archives from build to build. All `AbstractArchiveTask` (e.g. `Jar`, `Zip`) tasks shipped with Gradle include incubating support producing reproducible archives.

For example, to make a `Zip` task reproducible you need to set `Zip.isReproducibleFileOrder()` to `true` and `Zip.isPreserveFileTimestamps()` to `false`. In order to make all archive tasks in your build reproducible, consider adding the following configuration to your build file:

### Example 168. Activating reproducible archives

#### **build.gradle**

```
tasks.withType(AbstractArchiveTask) {  
    preserveFileTimestamps = false  
    reproducibleFileOrder = true  
}
```

Often you will want to publish an archive, so that it is usable from another project. This process is described in *Legacy publishing*

# Using Ant from Gradle

Gradle provides excellent integration with Ant. You can use individual Ant tasks or entire Ant builds in your Gradle builds. In fact, you will find that it's far easier and more powerful using Ant tasks in a Gradle build script, than it is to use Ant's XML format. You could even use Gradle simply as a powerful Ant task scripting tool.

Ant can be divided into two layers. The first layer is the Ant language. It provides the syntax for the `build.xml` file, the handling of the targets, special constructs like `macrodefs`, and so on. In other words, everything except the Ant tasks and types. Gradle understands this language, and allows you to import your Ant `build` directly into a Gradle project. You can then use the targets of your Ant build as if they were Gradle tasks.

The second layer of Ant is its wealth of Ant tasks and types, like `javac`, `copy` or `jar`. For this layer Gradle provides integration simply by relying on Groovy, and the fantastic `AntBuilder`.

Finally, since build scripts are Groovy scripts, you can always execute an Ant build as an external process. Your build script may contain statements like: `"ant clean compile".execute()`.<sup>[5]</sup>

You can use Gradle's Ant integration as a path for migrating your build from Ant to Gradle. For example, you could start by importing your existing Ant build. Then you could move your dependency declarations from the Ant script to your build file. Finally, you could move your tasks across to your build file, or replace them with some of Gradle's plugins. This process can be done in parts over time, and you can have a working Gradle build during the entire process.

## §

### Using Ant tasks and types in your build

In your build script, a property called `ant` is provided by Gradle. This is a reference to an `AntBuilder` instance. This `AntBuilder` is used to access Ant tasks, types and properties from your build script. There is a very simple mapping from Ant's `build.xml` format to Groovy, which is explained below.

You execute an Ant task by calling a method on the `AntBuilder` instance. You use the task name as the method name. For example, you execute the Ant `echo` task by calling the `ant.echo()` method. The attributes of the Ant task are passed as Map parameters to the method. Below is an example of the `echo` task. Notice that we can also mix Groovy code and the Ant task markup. This can be extremely powerful.

### Example 169. Using an Ant task

#### build.gradle

```
task hello {
    doLast {
        String greeting = 'hello from Ant'
        ant.echo(message: greeting)
    }
}
```

#### Output of `gradle hello`

```
> gradle hello

> Task :hello
[ant:echo] hello from Ant

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

You pass nested text to an Ant task by passing it as a parameter of the task method call. In this example, we pass the message for the `echo` task as nested text:

### Example 170. Passing nested text to an Ant task

#### build.gradle

```
task hello {
    doLast {
        ant.echo('hello from Ant')
    }
}
```

#### Output of `gradle hello`

```
> gradle hello

> Task :hello
[ant:echo] hello from Ant

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

You pass nested elements to an Ant task inside a closure. Nested elements are defined in the same way as tasks, by calling a method with the same name as the element we want to define.

### Example 171. Passing nested elements to an Ant task

#### build.gradle

```
task zip {
    doLast {
        ant.zip(destfile: 'archive.zip') {
            fileset(dir: 'src') {
                include(name: '**.xml')
                exclude(name: '**.java')
            }
        }
    }
}
```

You can access Ant types in the same way that you access tasks, using the name of the type as the method name. The method call returns the Ant data type, which you can then use directly in your build script. In the following example, we create an Ant `path` object, then iterate over the contents of it.

### Example 172. Using an Ant type

#### build.gradle

```
task list {
    doLast {
        def path = ant.path {
            fileset(dir: 'libs', includes: '*.jar')
        }
        path.list().each {
            println it
        }
    }
}
```

More information about `AntBuilder` can be found in 'Groovy in Action' 8.4 or at the Groovy Wiki

§

### Using custom Ant tasks in your build

To make custom tasks available in your build, you can use the `taskdef` (usually easier) or `typedef` Ant task, just as you would in a `build.xml` file. You can then refer to the custom Ant task as you would a built-in Ant task.

### Example 173. Using a custom Ant task

#### build.gradle

```
task check {
    doLast {
        ant.taskdef(resource: 'checkstyletask.properties') {
            classpath {
                fileset(dir: 'libs', includes: '*.jar')
            }
        }
        ant.checkstyle(config: 'checkstyle.xml') {
            fileset(dir: 'src')
        }
    }
}
```

You can use Gradle's dependency management to assemble the classpath to use for the custom tasks. To do this, you need to define a custom configuration for the classpath, then add some dependencies to the configuration. This is described in more detail in *Declaring Dependencies*.

### Example 174. Declaring the classpath for a custom Ant task

#### build.gradle

```
configurations {
    pmd
}

dependencies {
    pmd group: 'pmd', name: 'pmd', version: '4.2.5'
}
```

To use the classpath configuration, use the `asPath` property of the custom configuration.

### Example 175. Using a custom Ant task and dependency management together

#### build.gradle

```
task check {
    doLast {
        ant.taskdef(name: 'pmd',
                    classname: 'net.sourceforge.pmd.ant.PMDTask',
                    classpath: configurations.pmd.asPath)
        ant.pmd(shortFileNames: 'true',
                failonruleviolation: 'true',
                rulesetfiles: file('pmd-rules.xml').toURI().toString()) {
            formatter(type: 'text', toConsole: 'true')
            fileset(dir: 'src')
        }
    }
}
```

## §

### Importing an Ant build

You can use the `ant.importBuild()` method to import an Ant build into your Gradle project. When you import an Ant build, each Ant target is treated as a Gradle task. This means you can manipulate and execute the Ant targets in exactly the same way as Gradle tasks.

#### Example 176. Importing an Ant build

##### **build.gradle**

```
ant.importBuild 'build.xml'
```

##### **build.xml**

```
<project>
  <target name="hello">
    <echo>Hello, from Ant</echo>
  </target>
</project>
```

##### Output of **gradle hello**

```
> gradle hello

> Task :hello
[ant:echo] Hello, from Ant

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

You can add a task which depends on an Ant target:

### Example 177. Task that depends on Ant target

#### build.gradle

```
ant.importBuild 'build.xml'

task intro(dependsOn: hello) {
    doLast {
        println 'Hello, from Gradle'
    }
}
```

#### Output of **gradle intro**

```
> gradle intro

> Task :hello
[ant:echo] Hello, from Ant

> Task :intro
Hello, from Gradle

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

Or, you can add behaviour to an Ant target:

### Example 178. Adding behaviour to an Ant target

#### build.gradle

```
ant.importBuild 'build.xml'

hello {
    doLast {
        println 'Hello, from Gradle'
    }
}
```

#### Output of **gradle hello**

```
> gradle hello

> Task :hello
[ant:echo] Hello, from Ant
Hello, from Gradle

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

It is also possible for an Ant target to depend on a Gradle task:



### Example 179. Ant target that depends on Gradle task

#### build.gradle

```
ant.importBuild 'build.xml'

task intro {
    doLast {
        println 'Hello, from Gradle'
    }
}
```

#### build.xml

```
<project>
    <target name="hello" depends="intro">
        <echo>Hello, from Ant</echo>
    </target>
</project>
```

#### Output of **gradle hello**

```
> gradle hello

> Task :intro
Hello, from Gradle

> Task :hello
[ant:echo] Hello, from Ant

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

Sometimes it may be necessary to “rename” the task generated for an Ant target to avoid a naming collision with existing Gradle tasks. To do this, use the `AntBuilder.importBuild(java.lang.Object, org.gradle.api.Transformer)` method.

### Example 180. Renaming imported Ant targets

#### build.gradle

```
ant.importBuild('build.xml') { antTargetName ->
    'a-' + antTargetName
}
```

#### build.xml

```
<project>
    <target name="hello">
        <echo>Hello, from Ant</echo>
    </target>
</project>
```

#### Output of gradle a-hello

```
> gradle a-hello

> Task :a-hello
[ant:echo] Hello, from Ant

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

Note that while the second argument to this method should be a [Transformer](#), when programming in Groovy we can simply use a closure instead of an anonymous inner class (or similar) due to Groovy's support for automatically coercing closures to single-abstract-method types.

## §

## Ant properties and references

There are several ways to set an Ant property, so that the property can be used by Ant tasks. You can set the property directly on the `AntBuilder` instance. The Ant properties are also available as a `Map` which you can change. You can also use the `Ant property` task. Below are some examples of how to do this.

### Example 181. Setting an Ant property

#### build.gradle

```
ant.buildDir = buildDir
ant.properties.buildDir = buildDir
ant.properties['buildDir'] = buildDir
ant.property(name: 'buildDir', location: buildDir)
```

#### build.xml

```
<echo>buildDir = ${buildDir}</echo>
```

Many Ant tasks set properties when they execute. There are several ways to get the value of these properties. You can get the property directly from the `AntBuilder` instance. The Ant properties are also

available as a Map. Below are some examples.

#### Example 182. Getting an Ant property

##### **build.xml**

```
<property name="antProp" value="a property defined in an Ant build"/>
```

##### **build.gradle**

```
println ant.antProp
println ant.properties.antProp
println ant.properties['antProp']
```

There are several ways to set an Ant reference:

#### Example 183. Setting an Ant reference

##### **build.gradle**

```
ant.path(id: 'classpath', location: 'libs')
ant.references.classpath = ant.path(location: 'libs')
ant.references['classpath'] = ant.path(location: 'libs')
```

##### **build.xml**

```
<path refid="classpath"/>
```

There are several ways to get an Ant reference:

#### Example 184. Getting an Ant reference

##### **build.xml**

```
<path id="antPath" location="libs"/>
```

##### **build.gradle**

```
println ant.references.antPath
println ant.references['antPath']
```

## §

## Ant logging

Gradle maps Ant message priorities to Gradle log levels so that messages logged from Ant appear in the Gradle output. By default, these are mapped as follows:

**Table 6. Ant message priority mapping**

Ant Message Priority	Gradle Log Level
VERBOSE	DEBUG
DEBUG	DEBUG
INFO	INFO
WARN	WARN
ERROR	ERROR

## §

### Fine tuning Ant logging

The default mapping of Ant message priority to Gradle log level can sometimes be problematic. For example, there is no message priority that maps directly to the `LIFECYCLE` log level, which is the default for Gradle. Many Ant tasks log messages at the `INFO` priority, which means to expose those messages from Gradle, a build would have to be run with the log level set to `INFO`, potentially logging much more output than is desired.

Conversely, if an Ant task logs messages at too high of a level, to suppress those messages would require the build to be run at a higher log level, such as `QUIET`. However, this could result in other, desirable output being suppressed.

To help with this, Gradle allows the user to fine tune the Ant logging and control the mapping of message priority to Gradle log level. This is done by setting the priority that should map to the default Gradle `LIFECYCLE` log level using the `AntBuilder.setLifecycleLogLevel(java.lang.String)` method. When this value is set, any Ant message logged at the configured priority or above will be logged at least at `LIFECYCLE`. Any Ant message logged below this priority will be logged at most at `INFO`.

For example, the following changes the mapping such that Ant `INFO` priority messages are exposed at the `L` log level.

### Example 185. Fine tuning Ant logging

#### build.gradle

```
ant.lifecycleLogLevel = "INFO"

task hello {
    doLast {
        ant.echo(level: "info", message: "hello from info priority!")
    }
}
```

#### Output of `gradle hello`

```
> gradle hello

> Task :hello
[ant:echo] hello from info priority!

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

On the other hand, if the `lifecycleLogLevel` was set to `ERROR`, Ant messages logged at the `WARN` priority would no longer be logged at the `WARN` log level. They would now be logged at the `INFO` level and would be suppressed by default.

§

## API

The Ant integration is provided by [AntBuilder](#).

---

[5] In Groovy you can execute Strings. To learn more about executing external processes with Groovy have a look in 'Groovy in Action' 9.3.2 or at the Groovy wiki

# Build Lifecycle

We said earlier that the core of Gradle is a language for dependency based programming. In Gradle terms this means that you can define tasks and dependencies between tasks. Gradle guarantees that these tasks are executed in the order of their dependencies, and that each task is executed only once. These tasks form a Directed Acyclic Graph. There are build tools that build up such a dependency graph as they execute their tasks. Gradle builds the complete dependency graph *before* any task is executed. This lies at the heart of Gradle and makes many things possible which would not be possible otherwise.

Your build scripts configure this dependency graph. Therefore they are strictly speaking *build configuration scripts*.

§

## Build phases

A Gradle build has three distinct phases.

### Initialization

Gradle supports single and multi-project builds. During the initialization phase, Gradle determines which projects are going to take part in the build, and creates a `Project` instance for each of these projects.

### Configuration

During this phase the project objects are configured. The build scripts of *all* projects which are part of the build are executed. Gradle 1.4 introduced an incubating opt-in feature called *configuration on demand*. In this mode, Gradle configures only relevant projects (see the section called “Configuration on demand”).

### Execution

Gradle determines the subset of the tasks, created and configured during the configuration phase, to be executed. The subset is determined by the task name arguments passed to the `gradle` command and the current directory. Gradle then executes each of the selected tasks.

§

## Settings file

Beside the build script files, Gradle defines a settings file. The settings file is determined by Gradle via a naming convention. The default name for this file is `settings.gradle`. Later in this chapter we explain how Gradle looks for a settings file.

The settings file is executed during the initialization phase. A multiproject build must have a `settings.gradle` file in the root project of the multiproject hierarchy. It is required because the settings file defines which projects are taking part in the multi-project build (see *Authoring Multi-Project Builds*). For a single-project build, a settings file is optional. Besides defining the included projects, you might need it to add libraries to your build script classpath (see *Organizing Gradle Projects*). Let's first do some introspection with a single project build:

### Example 186. Single project build

#### **settings.gradle**

```
println 'This is executed during the initialization phase.'
```

#### **build.gradle**

```
println 'This is executed during the configuration phase.'
```

```
task configured {
    println 'This is also executed during the configuration phase.'
}
```

```
task test {
    doLast {
        println 'This is executed during the execution phase.'
    }
}
```

```
task testBoth {
    doFirst {
        println 'This is executed first during the execution phase.'
    }
    doLast {
        println 'This is executed last during the execution phase.'
    }
    println 'This is executed during the configuration phase as well.'
}
```

#### **Output of `gradle test testBoth`**

```
> gradle test testBoth
This is executed during the initialization phase.

> Configure project :
This is executed during the configuration phase.
This is also executed during the configuration phase.
This is executed during the configuration phase as well.

> Task :test
This is executed during the execution phase.

> Task :testBoth
This is executed first during the execution phase.
This is executed last during the execution phase.

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

For a build script, the property access and method calls are delegated to a project object. Similarly property access and method calls within the settings file is delegated to a settings object. Look at the [Settings](#)



class in the API documentation for more information.

§

## Multi-project builds

A multi-project build is a build where you build more than one project during a single execution of Gradle. You have to declare the projects taking part in the multiproject build in the settings file. There is much more to say about multi-project builds in the chapter dedicated to this topic (see *Authoring Multi-Project Builds*).

§

### Project locations

Multi-project builds are always represented by a tree with a single root. Each element in the tree represents a project. A project has a path which denotes the position of the project in the multi-project build tree. In most cases the project path is consistent with the physical location of the project in the file system. However, this behavior is configurable. The project tree is created in the `settings.gradle` file. By default it is assumed that the location of the settings file is also the location of the root project. But you can redefine the location of the root project in the settings file.

§

### Building the tree

In the settings file you can use a set of methods to build the project tree. Hierarchical and flat physical layouts get special support.

§

### Hierarchical layouts

#### Example 187. Hierarchical layout

**settings.gradle**

```
include 'project1', 'project2:child', 'project3:child1'
```

The `include` method takes project paths as arguments. The project path is assumed to be equal to the relative physical file system path. For example, a path `'services:api'` is mapped by default to a folder `'services/api'` (relative from the project root). You only need to specify the leaves of the tree. This means that the inclusion of the path `'services:hotels:api'` will result in creating 3 projects: `'services'`, `'services:hotels'` and `'services:hotels:api'`. More examples of how to work with the project path can be found in the DSL documentation of `Settings.include(java.lang.String[])`.

§

### Flat layouts

#### Example 188. Flat layout

**settings.gradle**

```
includeFlat 'project3', 'project4'
```

The `includeFlat` method takes directory names as an argument. These directories need to exist as siblings of the root project directory. The location of these directories are considered as child projects of the root project in the multi-project tree.

§

## Modifying elements of the project tree

The multi-project tree created in the settings file is made up of so called *project descriptors*. You can modify these descriptors in the settings file at any time. To access a descriptor you can do:

### Example 189. Lookup of elements of the project tree

```
settings.gradle
println rootProject.name
println project(':projectA').name
```

Using this descriptor you can change the name, project directory and build file of a project.

### Example 190. Modification of elements of the project tree

```
settings.gradle
rootProject.name = 'main'
project(':projectA').projectDir = new File(settingsDir, '../my-project-a')
project(':projectA').buildFileName = 'projectA.gradle'
```

Look at the [ProjectDescriptor](#) class in the API documentation for more information.

§

## Initialization

How does Gradle know whether to do a single or multiproject build? If you trigger a multiproject build from a directory with a settings file, things are easy. But Gradle also allows you to execute the build from within any subproject taking part in the build.<sup>[6]</sup> If you execute Gradle from within a project with no `settings.gradle` file, Gradle looks for a `settings.gradle` file in the following way:

It looks in a directory called `master` which has the same nesting level as the current dir.

If not found yet, it searches parent directories.

If not found yet, the build is executed as a single project build.

If a `settings.gradle` file is found, Gradle checks if the current project is part of the multiproject hierarchy defined in the found `settings.gradle` file. If not, the build is executed as a single project build. Otherwise a multiproject build is executed.

What is the purpose of this behavior? Gradle needs to determine whether the project you are in is a subproject of a multiproject build or not. Of course, if it is a subproject, only the subproject and its dependent

projects are built, but Gradle needs to create the build configuration for the whole multiproject build (see *Authoring Multi-Project Builds*). You can use the `-u` command line option to tell Gradle not to look in the parent hierarchy for a `settings.gradle` file. The current project is then always built as a single project build. If the current project contains a `settings.gradle` file, the `-u` option has no meaning. Such a build is always executed as:

a single project build, if the `settings.gradle` file does not define a multiproject hierarchy

a multiproject build, if the `settings.gradle` file does define a multiproject hierarchy.

The automatic search for a `settings.gradle` file only works for multi-project builds with a physical hierarchical or flat layout. For a flat layout you must additionally follow the naming convention described above (“master”). Gradle supports arbitrary physical layouts for a multiproject build, but for such arbitrary layouts you need to execute the build from the directory where the settings file is located. For information on how to run partial builds from the root see the section called “Running tasks by their absolute path”.

Gradle creates a Project object for every project taking part in the build. For a multi-project build these are the projects specified in the Settings object (plus the root project). Each project object has by default a name equal to the name of its top level directory, and every project except the root project has a parent project. Any project may have child projects.

§

## Configuration and execution of a single project build

For a single project build, the workflow of the *after initialization* phases are pretty simple. The build script is executed against the project object that was created during the initialization phase. Then Gradle looks for tasks with names equal to those passed as command line arguments. If these task names exist, they are executed as a separate build in the order you have passed them. The configuration and execution for multi-project builds is discussed in *Authoring Multi-Project Builds*.

§

## Responding to the lifecycle in the build script

Your build script can receive notifications as the build progresses through its lifecycle. These notifications generally take two forms: You can either implement a particular listener interface, or you can provide a closure to execute when the notification is fired. The examples below use closures. For details on how to use the listener interfaces, refer to the API documentation.

§

### Project evaluation

You can receive a notification immediately before and after a project is evaluated. This can be used to do things like performing additional configuration once all the definitions in a build script have been applied, or for some custom logging or profiling.

Below is an example which adds a `test` task to each project which has a `hasTests` property value of true.

### Example 191. Adding of test task to each project which has certain property set

#### build.gradle

```
allprojects {
    afterEvaluate { project ->
        if (project.hasTests) {
            println "Adding test task to $project"
            project.task('test') {
                doLast {
                    println "Running tests for $project"
                }
            }
        }
    }
}
```

#### projectA.gradle

```
hasTests = true
```

#### Output of `gradle -q test`

```
> gradle -q test
Adding test task to project ':projectA'
Running tests for project ':projectA'
```

This example uses method `Project.afterEvaluate()` to add a closure which is executed after the project is evaluated.

It is also possible to receive notifications when any project is evaluated. This example performs some custom logging of project evaluation. Notice that the `afterProject` notification is received regardless of whether the project evaluates successfully or fails with an exception.

## Example 192. Notifications

### build.gradle

```
gradle.afterProject {project, projectState ->
    if (projectState.failure) {
        println "Evaluation of $project FAILED"
    } else {
        println "Evaluation of $project succeeded"
    }
}
```

### Output of `gradle -q test`

```
> gradle -q test
Evaluation of root project 'buildProjectEvaluateEvents' succeeded
Evaluation of project ':projectA' succeeded
Evaluation of project ':projectB' FAILED

FAILURE: Build failed with an exception.

* Where:
Build file '/home/user/gradle/samples/userguide/buildlifecycle/buildProjectEvaluateEvents/build.gradle' line: 10

* What went wrong:
A problem occurred evaluating project ':projectB'.
> broken

* Try:
Run with --stacktrace option to get the stack trace. Run with --info or --debug for more details.

* Get more help at https://help.gradle.org

BUILD FAILED in 0s
```

You can also add a [ProjectEvaluationListener](#) to the [Gradle](#) to receive these events.

§

### Task creation

You can receive a notification immediately after a task is added to a project. This can be used to set some default values or add behaviour before the task is made available in the build file.

The following example sets the `srcDir` property of each task as it is created.

### Example 193. Setting of certain property to all tasks

#### build.gradle

```
tasks.whenTaskAdded { task ->
    task.ext.srcDir = 'src/main/java'
}

task a

println "source dir is ${a.srcDir}"
```

#### Output of `gradle -q a`

```
> gradle -q a
source dir is src/main/java
```

You can also add an [Action](#) to a [TaskContainer](#) to receive these events.

§

#### Task execution graph ready

You can receive a notification immediately after the task execution graph has been populated. We have seen this already in the section called “Configure by DAG”.

You can also add a [TaskExecutionGraphListener](#) to the [TaskExecutionGraph](#) to receive these events.

§

#### Task execution

You can receive a notification immediately before and after any task is executed.

The following example logs the start and end of each task execution. Notice that the `afterTask` notification is received regardless of whether the task completes successfully or fails with an exception.

### Example 194. Logging of start and end of each task execution

#### build.gradle

```
task ok

task broken(dependsOn: ok) {
    doLast {
        throw new RuntimeException('broken')
    }
}

gradle.taskGraph.beforeTask { Task task ->
    println "executing $task ..."
}

gradle.taskGraph.afterTask { Task task, TaskState state ->
    if (state.failure) {
        println "FAILED"
    }
    else {
        println "done"
    }
}
```

#### Output of `gradle -q broken`

```
> gradle -q broken
executing task ':ok' ...
done
executing task ':broken' ...
FAILED

FAILURE: Build failed with an exception.

* Where:
Build file '/home/user/gradle/samples/userguide/buildlifecycle/taskExecutionEvent'

* What went wrong:
Execution failed for task ':broken'.

> broken

* Try:
Run with --stacktrace option to get the stack trace. Run with --info or --debug

* Get more help at https://help.gradle.org

BUILD FAILED in 0s
```

You can also use a [TaskExecutionListener](#) to the [TaskExecutionGraph](#) to receive these events.

---

[6] Gradle supports partial multiproject builds (see *Authoring Multi-Project Builds*).



# Logging

The log is the main 'UI' of a build tool. If it is too verbose, real warnings and problems are easily hidden by this. On the other hand you need relevant information for figuring out if things have gone wrong. Gradle defines 6 log levels, as shown in Table 7. There are two Gradle-specific log levels, in addition to the ones you might normally see. Those levels are *QUIET* and *LIFECYCLE*. The latter is the default, and is used to report build progress.

**Table 7. Log levels**

Level	Used for
ERROR	Error messages
QUIET	Important information messages
WARNING	Warning messages
LIFECYCLE	Progress information messages
INFO	Information messages
DEBUG	Debug messages

**Note:** The rich components of the console (build status and work in progress area) are displayed regardless of the log level used. Before Gradle 4.0 those rich components were only displayed at log level `LIFECYCLE` or below.

## §

### Choosing a log level

You can use the command line switches shown in Table 8 to choose different log levels. You can also configure the log level using `gradle.properties`, see the section called “Gradle properties”. In Table 9 you find the command line switches which affect stacktrace logging.

**Table 8. Log level command-line options**

Option	Outputs Log Levels
<code>-x</code> logging options	LIFECYCLE and higher
<code>-q</code> or <code>--quiet</code>	QUIET and higher
<code>-w</code> or <code>--warn</code>	WARN and higher
<code>-i</code> or <code>--info</code>	INFO and higher
<code>-d</code> or <code>--debug</code>	DEBUG and higher (that is, all log messages)

**Table 9. Stacktrace command-line options**

Option	Meaning
<code>-o</code> stacktrace options	No stacktraces are printed to the console in case of a build error (e.g. a compile error). Only in case of internal exceptions will stacktraces be printed. If the <code>DEBUG</code> log level is chosen, truncated stacktraces are always printed.
<code>-s</code> or <code>--stacktrace</code>	Truncated stacktraces are printed. We recommend this over full stacktraces. Groovy full stacktraces are extremely verbose (Due to the underlying dynamic invocation mechanisms. Yet they usually do not contain relevant information for what has gone wrong in <i>your</i> code.) This option renders stacktraces for deprecation warnings.
<code>-S</code> or <code>--full-stacktrace</code>	The full stacktraces are printed out. This option renders stacktraces for deprecation warnings.

## §

### Writing your own log messages

A simple option for logging in your build file is to write messages to standard output. Gradle redirects anything written to standard output to its logging system at the `QUIET` log level.

#### Example 195. Using stdout to write log messages

**build.gradle**

```
println 'A message which is logged at QUIET level'
```

Gradle also provides a `logger` property to a build script, which is an instance of `Logger`. This interface extends the SLF4J `Logger` interface and adds a few Gradle specific methods to it. Below is an example of how this is used in the build script:

### Example 196. Writing your own log messages

#### build.gradle

```
logger.quiet('An info log message which is always logged.')
logger.error('An error log message.')
logger.warn('A warning log message.')
logger.lifecycle('A lifecycle info log message.')
logger.info('An info log message.')
logger.debug('A debug log message.')
logger.trace('A trace log message.')
```

Use the typical SLF4J pattern to replace a placeholder with an actual value as part of the log message.

### Example 197. Writing a log message with placeholder

#### build.gradle

```
logger.info('A {} log message', 'info')
```

You can also hook into Gradle's logging system from within other classes used in the build (classes from the `build` directory for example). Simply use an SLF4J logger. You can use this logger the same way as you use the provided logger in the build script.

### Example 198. Using SLF4J to write log messages

#### build.gradle

```
import org.slf4j.Logger
import org.slf4j.LoggerFactory

Logger slf4jLogger = LoggerFactory.getLogger('some-logger')
slf4jLogger.info('An info log message logged using SLF4j')
```

## §

## Logging from external tools and libraries

Internally, Gradle uses Ant and Ivy. Both have their own logging system. Gradle redirects their logging output into the Gradle logging system. There is a 1:1 mapping from the Ant/Ivy log levels to the Gradle log levels, except the Ant/Ivy `TRACE` log level, which is mapped to Gradle `DEBUG` log level. This means the default Gradle log level will not show any Ant/Ivy output unless it is an error or a warning.

There are many tools out there which still use standard output for logging. By default, Gradle redirects standard output to the `QUIET` log level and standard error to the `ERROR` level. This behavior is configurable. The project object provides a [LoggingManager](#), which allows you to change the log levels that standard out or error are redirected to when your build script is evaluated.

### Example 199. Configuring standard output capture

#### **build.gradle**

```
logging.captureStandardOutput LogLevel.INFO
println 'A message which is logged at INFO level'
```

To change the log level for standard out or error during task execution, tasks also provide a [LoggingManager](#).

### Example 200. Configuring standard output capture for a task

#### **build.gradle**

```
task logInfo {
    logging.captureStandardOutput LogLevel.INFO
    doFirst {
        println 'A task message which is logged at INFO level'
    }
}
```

Gradle also provides integration with the Java Util Logging, Jakarta Commons Logging and Log4j logging toolkits. Any log messages which your build classes write using these logging toolkits will be redirected to Gradle's logging system.

## §

## Changing what Gradle logs

You can replace much of Gradle's logging UI with your own. You might do this, for example, if you want to customize the UI in some way - to log more or less information, or to change the formatting. You replace the logging using the [Gradle.useLogger\(java.lang.Object\)](#) method. This is accessible from a build script, or an init script, or via the embedding API. Note that this completely disables Gradle's default output. Below is an example init script which changes how task execution and build completion is logged.

## Example 201. Customizing what Gradle logs

### init.gradle

```
useLogger(new CustomEventLogger())

class CustomEventLogger extends BuildAdapter implements TaskExecutionListener {

    public void beforeExecute(Task task) {
        println "[$task.name]"
    }

    public void afterExecute(Task task, TaskState state) {
        println()
    }

    public void buildFinished(BuildResult result) {
        println 'build completed'
        if (result.failure != null) {
            result.failure.printStackTrace()
        }
    }
}
```

### Output of `gradle -I init.gradle build`

```
> gradle -I init.gradle build
```

```
> Task :compile
[compile]
compiling source
```

```
> Task :testCompile
[testCompile]
compiling test source
```

```
> Task :test
[test]
running unit tests
```

```
> Task :build
[build]
```

```
build completed
3 actionable tasks: 3 executed
```

Your logger can implement any of the listener interfaces listed below. When you register a logger, only the logging for the interfaces that it implements is replaced. Logging for the other interfaces is left untouched.

You can find out more about the listener interfaces in the section called “Responding to the lifecycle in the build script”.

`BuildListener`

`ProjectEvaluationListener`

`TaskExecutionGraphListener`

`TaskExecutionListener`

`TaskActionListener`

# Authoring Multi-Project Builds

The powerful support for multi-project builds is one of Gradle's unique selling points. This topic is also the most intellectually challenging.

A multi-project build in gradle consists of one root project, and one or more subprojects that may also have subprojects.

§

## Cross project configuration

While each subproject could configure itself in complete isolation of the other subprojects, it is common that subprojects share common traits. It is then usually preferable to share configurations among projects, so the same configuration affects several subprojects.

Let's start with a very simple multi-project build. Gradle is a general purpose build tool at its core, so the projects don't have to be Java projects. Our first examples are about marine life.

§

### Configuration and execution

the section called "Build phases" describes the phases of every Gradle build. Let's zoom into the configuration and execution phases of a multi-project build. Configuration here means executing the `build.gradle` file of a project, which implies e.g. downloading all plugins that were declared using `'apply plugin'`. By default, the configuration of all projects happens before any task is executed. This means that when a single task, from a single project is requested, *all* projects of multi-project build are configured first. The reason every project needs to be configured is to support the flexibility of accessing and changing any part of the Gradle project model.

§

### Configuration on demand

The *Configuration injection* feature and access to the complete project model are possible because every project is configured before the execution phase. Yet, this approach may not be the most efficient in a very large multi-project build. There are Gradle builds with a hierarchy of hundreds of subprojects. The configuration time of huge multi-project builds may become noticeable. Scalability is an important requirement for Gradle. Hence, starting from version 1.4 a new incubating 'configuration on demand' mode is introduced.

Configuration on demand mode attempts to configure only projects that are relevant for requested tasks, i.e. it only executes the `build.gradle` file of projects that are participating in the build. This way, the configuration time of a large multi-project build can be reduced. In the long term, this mode will become the default mode, possibly the only mode for Gradle build execution. The configuration on demand feature is incubating so not every build is guaranteed to work correctly. The feature should work very well for multi-project builds that have decoupled projects (the section called “Decoupled Projects”). In “configuration on demand” mode, projects are configured as follows:

The root project is always configured. This way the typical common configuration is supported (allprojects or subprojects script blocks).

The project in the directory where the build is executed is also configured, but only when Gradle is executed without any tasks. This way the default tasks behave correctly when projects are configured on demand.

The standard project dependencies are supported and makes relevant projects configured. If project A has a compile dependency on project B then building A causes configuration of both projects.

The task dependencies declared via task path are supported and cause relevant projects to be configured. Example: `someTask.dependsOn(":someOtherProject:someOtherTask")`

A task requested via task path from the command line (or Tooling API) causes the relevant project to be configured. For example, building 'projectA:projectB:someTask' causes configuration of projectB.

Eager to try out this new feature? To configure on demand with every build run see the section called “Gradle properties”. To configure on demand just for a given build, see the section called “Performance options”.

§

## Defining common behavior

Let's look at some examples with the following project tree. This is a multi-project build with a root project named `water` and a subproject named `bluewhale`.

### Example 202. Multi-project tree - water & bluewhale projects

Build layout

```
water/  
  build.gradle  
  settings.gradle  
  bluewhale/
```

**Note:** The code for this example can be found at `samples/userguide/multiproject/firstExample` in the ‘-all’ distribution of Gradle.

```
settings.gradle  
include 'bluewhale'
```

And where is the build script for the `bluewhale` project? In Gradle build scripts are optional. Obviously for a



single project build, a project without a build script doesn't make much sense. For multiproject builds the situation is different. Let's look at the build script for the `water` project and execute it:

#### Example 203. Build script of water (parent) project

##### **build.gradle**

```
Closure cl = { task -> println "I'm $task.project.name" }
task('hello').doLast(cl)
project(':bluewhale') {
    task('hello').doLast(cl)
}
```

##### Output of `gradle -q hello`

```
> gradle -q hello
I'm water
I'm bluewhale
```

Gradle allows you to access any project of the multi-project build from any build script. The Project API provides a method called `project()`, which takes a path as an argument and returns the Project object for this path. The capability to configure a project build from any build script we call *cross project configuration*. Gradle implements this via *configuration injection*.

We are not that happy with the build script of the `water` project. It is inconvenient to add the task explicitly for every project. We can do better. Let's first add another project called `krill` to our multi-project build.

#### Example 204. Multi-project tree - water, bluewhale & krill projects

##### Build layout

```
water/
  build.gradle
  settings.gradle
  bluewhale/
  krill/
```

**Note:** The code for this example can be found at `samples/userguide/multiproject/addKrill/` in the '-all' distribution of Gradle.

##### **settings.gradle**

```
include 'bluewhale', 'krill'
```

Now we rewrite the `water` build script and boil it down to a single line.

### Example 205. Water project build script

#### build.gradle

```
allprojects {  
    task hello {  
        doLast { task ->  
            println "I'm $task.project.name"  
        }  
    }  
}
```

#### Output of `gradle -q hello`

```
> gradle -q hello  
I'm water  
I'm bluewhale  
I'm krill
```

Is this cool or is this cool? And how does this work? The Project API provides a property `allprojects` which returns a list with the current project and all its subprojects underneath it. If you call `allprojects` with a closure, the statements of the closure are delegated to the projects associated with `allprojects`. You could also do an iteration via `allprojects.each`, but that would be more verbose.

Other build systems use inheritance as the primary means for defining common behavior. We also offer inheritance for projects as you will see later. But Gradle uses configuration injection as the usual way of defining common behavior. We think it provides a very powerful and flexible way of configuring multiproject builds.

Another possibility for sharing configuration is to use a common external script. See ??? for more information.

## §

### Subproject configuration

The Project API also provides a property for accessing the subprojects only.

§

## Defining common behavior

### Example 206. Defining common behavior of all projects and subprojects

#### build.gradle

```
allprojects {
    task hello {
        doLast { task ->
            println "I'm $task.project.name"
        }
    }
}
subprojects {
    hello {
        doLast {
            println "- I depend on water"
        }
    }
}
```

#### Output of `gradle -q hello`

```
> gradle -q hello
I'm water
I'm bluewhale
- I depend on water
I'm krill
- I depend on water
```

You may notice that there are two code snippets referencing the “hello” task. The first one, which uses the “task” keyword, constructs the task and provides its base configuration. The second piece doesn’t use the “” keyword, as it is further configuring the existing “hello” task. You may only construct a task once in a project, but you may add any number of code blocks providing additional configuration.

§

## Adding specific behavior

You can add specific behavior on top of the common behavior. Usually we put the project specific behavior in the build script of the project where we want to apply this specific behavior. But as we have already seen, we don’t have to do it this way. We could add project specific behavior for the `bluewhale` project like this:

### Example 207. Defining specific behaviour for particular project

#### build.gradle

```
allprojects {
    task hello {
        doLast { task ->
            println "I'm $task.project.name"
        }
    }
}
subprojects {
    hello {
        doLast {
            println "- I depend on water"
        }
    }
}
project(':bluewhale').hello {
    doLast {
        println "- I'm the largest animal that has ever lived on this planet."
    }
}
```

#### Output of `gradle -q hello`

```
> gradle -q hello
I'm water
I'm bluewhale
- I depend on water
- I'm the largest animal that has ever lived on this planet.
I'm krill
- I depend on water
```

As we have said, we usually prefer to put project specific behavior into the build script of this project. Let's refactor and also add some project specific behavior to the `krill` project.

### Example 208. Defining specific behaviour for project krill

#### Build layout

```
water/
  build.gradle
  settings.gradle
bluewhale/
  build.gradle
krill/
  build.gradle
```

**Note:** The code for this example can be found at `samples/userguide/multiplatform/spreadSpec` in the 'all' distribution of Gradle.

#### **settings.gradle**

```
include 'bluewhale', 'krill'
```

#### **bluewhale/build.gradle**

```
hello.doLast {  
    println "- I'm the largest animal that has ever lived on this planet."  
}
```

#### **krill/build.gradle**

```
hello.doLast {  
    println "- The weight of my species in summer is twice as heavy as all human beings."  
}
```

#### **build.gradle**

```
allprojects {  
    task hello {  
        doLast { task ->  
            println "I'm $task.project.name"  
        }  
    }  
}  
subprojects {  
    hello {  
        doLast {  
            println "- I depend on water"  
        }  
    }  
}
```

#### **Output of `gradle -q hello`**

```
> gradle -q hello  
I'm water  
I'm bluewhale  
- I depend on water  
- I'm the largest animal that has ever lived on this planet.  
I'm krill  
- I depend on water  
- The weight of my species in summer is twice as heavy as all human beings.
```

§

### **Project filtering**

To show more of the power of configuration injection, let's add another project called `tropicalFish` and add more behavior to the build via the build script of the `water` project.

§

Filtering by name

#### Example 209. Adding custom behaviour to some projects (filtered by project name)

Build layout

```
water/  
  build.gradle  
  settings.gradle  
  bluewhale/  
    build.gradle  
  krill/  
    build.gradle  
  tropicalFish/
```

**Note:** The code for this example can be found at `samples/userguide/multiproject/addTropic` in the ‘-all’ distribution of Gradle.

**settings.gradle**

```
include 'bluewhale', 'krill', 'tropicalFish'
```

**build.gradle**

```
allprojects {  
    task hello {  
        doLast { task ->  
            println "I'm $task.project.name"  
        }  
    }  
}  
subprojects {  
    hello {  
        doLast {  
            println "- I depend on water"  
        }  
    }  
}  
configure(subprojects.findAll {it.name != 'tropicalFish'}) {  
    hello {  
        doLast {  
            println '- I love to spend time in the arctic waters.'  
        }  
    }  
}
```

Output of `gradle -q hello`

```
> gradle -q hello
I'm water
I'm bluewhale
- I depend on water
- I love to spend time in the arctic waters.
- I'm the largest animal that has ever lived on this planet.
I'm krill
- I depend on water
- I love to spend time in the arctic waters.
- The weight of my species in summer is twice as heavy as all human beings.
I'm tropicalFish
- I depend on water
```

The `configure()` method takes a list as an argument and applies the configuration to the projects in this list.

§

#### Filtering by properties

Using the project name for filtering is one option. Using extra project properties is another. (See the section called “Extra properties” for more information on extra properties.)

#### Example 210. Adding custom behaviour to some projects (filtered by project properties)

##### Build layout

```
water/
  build.gradle
  settings.gradle
bluewhale/
  build.gradle
krill/
  build.gradle
tropicalFish/
  build.gradle
```

**Note:** The code for this example can be found at `samples/userguide/multiplatform/tropicalFish` in the ‘-all’ distribution of Gradle.

##### **settings.gradle**

```
include 'bluewhale', 'krill', 'tropicalFish'
```

##### **bluewhale/build.gradle**

```
ext.arctic = true
hello.doLast {
    println "- I'm the largest animal that has ever lived on this planet."
}
```

#### krill/build.gradle

```
ext.arctic = true
hello.doLast {
    println "- The weight of my species in summer is twice as heavy as all human
}
```

#### tropicalFish/build.gradle

```
ext.arctic = false
```

#### build.gradle

```
allprojects {
    task hello {
        doLast { task ->
            println "I'm $task.project.name"
        }
    }
}
subprojects {
    hello {
        doLast {println "- I depend on water"}
        afterEvaluate { Project project ->
            if (project.arctic) { doLast {
                println '- I love to spend time in the arctic waters.' }
            }
        }
    }
}
```

#### Output of gradle -q hello

```
> gradle -q hello
I'm water
I'm bluewhale
- I depend on water
- I'm the largest animal that has ever lived on this planet.
- I love to spend time in the arctic waters.
I'm krill
- I depend on water
- The weight of my species in summer is twice as heavy as all human beings.
- I love to spend time in the arctic waters.
I'm tropicalFish
- I depend on water
```

In the build file of the `water` project we use an `afterEvaluate` notification. This means that the closure we are passing gets evaluated *after* the build scripts of the subproject are evaluated. As the property `arctic` is set in those build scripts, we have to do it this way. You will find more on this topic in the section called “Dependencies - Which dependencies?”



## §

### Execution rules for multi-project builds

When we executed the `hello` task from the root project dir, things behaved in an intuitive way. All the `hello` tasks of the different projects were executed. Let's switch to the `bluewhale` dir and see what happens if we execute Gradle from there.

#### Example 211. Running build from subproject

Output of `gradle -q hello`

```
> gradle -q hello
I'm bluewhale
- I depend on water
- I'm the largest animal that has ever lived on this planet.
- I love to spend time in the arctic waters.
```

The basic rule behind Gradle's behavior is simple. Gradle looks down the hierarchy, starting with the *current dir*, for tasks with the name `hello` and executes them. One thing is very important to note. Gradle *always* evaluates *every* project of the multi-project build and creates all existing task objects. Then, according to the task name arguments and the current dir, Gradle filters the tasks which should be executed. Because of Gradle's cross project configuration *every* project has to be evaluated before *any* task gets executed. We will have a closer look at this in the next section. Let's now have our last marine example. Let's add a task to `bluewhale` and `krill`.

## Example 212. Evaluation and execution of projects

### bluewhale/build.gradle

```
ext.arctic = true
hello {
    doLast {
        println "- I'm the largest animal that has ever lived on this planet."
    }
}

task distanceToIceberg {
    doLast {
        println '20 nautical miles'
    }
}
```

### krill/build.gradle

```
ext.arctic = true
hello {
    doLast {
        println "- The weight of my species in summer is twice as heavy as all h
    }
}

task distanceToIceberg {
    doLast {
        println '5 nautical miles'
    }
}
```

### Output of `gradle -q distanceToIceberg`

```
> gradle -q distanceToIceberg
20 nautical miles
5 nautical miles
```

Here's the output without the `-q` option:

### Example 213. Evaluation and execution of projects

#### Output of `gradle distanceToIceberg`

```
> gradle distanceToIceberg

> Task :bluewhale:distanceToIceberg
20 nautical miles

> Task :krill:distanceToIceberg
5 nautical miles

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

The build is executed from the `water` project. Neither `water` nor `tropicalFish` have a task with the name `distanceToIceberg`. Gradle does not care. The simple rule mentioned already above is: Execute all tasks down the hierarchy which have this name. Only complain if there is *no* such task!

## §

### Running tasks by their absolute path

As we have seen, you can run a multi-project build by entering any subproject dir and execute the build from there. All matching task names of the project hierarchy starting with the current dir are executed. But Gradle also offers to execute tasks by their absolute path (see also the section called “Project and task paths”):

### Example 214. Running tasks by their absolute path

#### Output of `gradle -q :hello :krill:hello hello`

```
> gradle -q :hello :krill:hello hello
I'm water
I'm krill
- I depend on water
- The weight of my species in summer is twice as heavy as all human beings.
- I love to spend time in the arctic waters.
I'm tropicalFish
- I depend on water
```

The build is executed from the `tropicalFish` project. We execute the `hello` tasks of the `water`, the `krill` and the `tropicalFish` project. The first two tasks are specified by their absolute path, the last task is executed using the name matching mechanism described above.

§

## Project and task paths

A project path has the following pattern: It starts with an optional colon, which denotes the root project. The root project is the only project in a path that is not specified by its name. The rest of a project path is a colon-separated sequence of project names, where the next project is a subproject of the previous project.

The path of a task is simply its project path plus the task name, like “:bluewhale:hello”. Within a project you can address a task of the same project just by its name. This is interpreted as a relative path.

§

## Dependencies - Which dependencies?

The examples from the last section were special, as the projects had no *Execution Dependencies*. They had only *Configuration Dependencies*. The following sections illustrate the differences between these two types of dependencies.

§

## Execution dependencies

§

### Dependencies and execution order

#### Example 215. Dependencies and execution order

##### Build layout

```
messages/  
  build.gradle  
  settings.gradle  
  consumer/  
    build.gradle  
  producer/  
    build.gradle
```

**Note:** The code for this example can be found at `samples/userguide/multiplatform/dependencies` in the ‘-all’ distribution of Gradle.

##### build.gradle

```
ext.producerMessage = null
```

##### settings.gradle

```
include 'consumer', 'producer'
```

##### consumer/build.gradle

```
task action {  
    doLast {  
        println("Consuming message: ${rootProject.producerMessage}")  
    }  
}
```

##### producer/build.gradle

```
task action {  
    doLast {  
        println "Producing message:"  
        rootProject.producerMessage = 'Watch the order of execution.'  
    }  
}
```

##### Output of `gradle -q action`

```
> gradle -q action  
Consuming message: null  
Producing message:
```

This didn't quite do what we want. If nothing else is defined, Gradle executes the task in alphanumeric order. Therefore, Gradle will execute “:consumer:action” before “:producer:action”. Let's try to solve this with a hack and rename the producer project to “aProducer”.

### Example 216. Dependencies and execution order

#### Build layout

```
messages/  
  build.gradle  
  settings.gradle  
  aProducer/  
    build.gradle  
  consumer/  
    build.gradle
```

#### build.gradle

```
ext.producerMessage = null
```

#### settings.gradle

```
include 'consumer', 'aProducer'
```

#### aProducer/build.gradle

```
task action {  
    doLast {  
        println "Producing message:"  
        rootProject.producerMessage = 'Watch the order of execution.'  
    }  
}
```

#### consumer/build.gradle

```
task action {  
    doLast {  
        println("Consuming message: ${rootProject.producerMessage}")  
    }  
}
```

#### Output of `gradle -q action`

```
> gradle -q action  
Producing message:  
Consuming message: Watch the order of execution.
```

We can show where this hack doesn't work if we now switch to the `consumer` dir and execute the build.

### Example 217. Dependencies and execution order

#### Output of `gradle -q action`

```
> gradle -q action  
Consuming message: null
```

The problem is that the two “action” tasks are unrelated. If you execute the build from the “messages” project Gradle executes them both because they have the same name and they are down the hierarchy. In the last example only one “action” task was down the hierarchy and therefore it was the only task that was

executed. We need something better than this hack.

§

## Real life examples

Gradle's multi-project features are driven by real life use cases. One good example consists of two web application projects and a parent project that creates a distribution including the two web applications.<sup>[7]</sup> For the example we use only one build script and do *cross project configuration*.

## Example 218. Dependencies - real life example - crossproject configuration

### Build layout

```
webDist/
  settings.gradle
  build.gradle
  date/
    src/main/java/
      org/gradle/sample/
        DateServlet.java
  hello/
    src/main/java/
      org/gradle/sample/
        HelloServlet.java
```

**Note:** The code for this example can be found at `samples/userguide/multiproject/dependencies` in the ‘-all’ distribution of Gradle.

### settings.gradle

```
include 'date', 'hello'
```

### build.gradle

```
allprojects {
    apply plugin: 'java'
    group = 'org.gradle.sample'
    version = '1.0'
}

subprojects {
    apply plugin: 'war'
    repositories {
        mavenCentral()
    }
    dependencies {
        compile "javax.servlet:servlet-api:2.5"
    }
}

task explodedDist(type: Copy) {
    into "$buildDir/explodedDist"
    subprojects {
        from tasks.withType(War)
    }
}
```

We have an interesting set of dependencies. Obviously the `date` and `hello` projects have a *configuration* dependency on `webDist`, as all the build logic for the webapp projects is injected by `webDist`. The *execution* dependency is in the other direction, as `webDist` depends on the build artifacts of `date` and `hello`.



. There is even a third dependency. `webDist` has a *configuration* dependency on `date` and `hello` because it needs to know the `archivePath`. But it asks for this information at *execution time*. Therefore we have no circular dependency.

Such dependency patterns are daily bread in the problem space of multi-project builds. If a build system does not support these patterns, you either can't solve your problem or you need to do ugly hacks which are hard to maintain and massively impair your productivity as a build master.

§

## Project lib dependencies

What if one project needs the jar produced by another project in its compile path, and not just the jar but also the transitive dependencies of this jar? Obviously this is a very common use case for Java multi-project builds. As already mentioned in the section called “Project dependencies”, Gradle offers project lib dependencies for this.

### Example 219. Project lib dependencies

#### Build layout

```
java/
  settings.gradle
  build.gradle
  api/
    src/main/java/
      org/gradle/sample/
        api/
          Person.java
          apiImpl/
            PersonImpl.java
  services/personService/
    src/
      main/java/
        org/gradle/sample/services/
          PersonService.java
      test/java/
        org/gradle/sample/services/
          PersonServiceTest.java
  shared/
    src/main/java/
      org/gradle/sample/shared/
        Helper.java
```

**Note:** The code for this example can be found at `samples/userguide/multiproject/dependencies` in the ‘-all’ distribution of Gradle.

We have the projects “shared”, “api” and “personService”. The “personService” project has a lib dependency on the other two projects. The “api” project has a lib dependency on the “shared” project. “ser

" is also a project, but we use it just as a container. It has no build script and gets nothing injected by another build script. We use the `:` separator to define a project path. Consult the DSL documentation of `Settings.include(java.lang.String[])` for more information about defining project paths.

#### Example 220. Project lib dependencies

##### **settings.gradle**

```
include 'api', 'shared', 'services:personService'
```

##### **build.gradle**

```
subprojects {
    apply plugin: 'java'
    group = 'org.gradle.sample'
    version = '1.0'
    repositories {
        mavenCentral()
    }
    dependencies {
        testCompile "junit:junit:4.12"
    }
}

project(':api') {
    dependencies {
        compile project(':shared')
    }
}

project(':services:personService') {
    dependencies {
        compile project(':shared'), project(':api')
    }
}
```

All the build logic is in the “build.gradle” file of the root project.<sup>[8]</sup> A “*lib*” dependency is a special form of an execution dependency. It causes the other project to be built first and adds the jar with the classes of the other project to the classpath. It also adds the dependencies of the other project to the classpath. So you can enter the “api” directory and trigger a “gradle compile”. First the “shared” project is built and then the “api” project is built. Project dependencies enable partial multi-project builds.

If you come from Maven land you might be perfectly happy with this. If you come from Ivy land, you might expect some more fine grained control. Gradle offers this to you:

## Example 221. Fine grained control over dependencies

### build.gradle

```
subprojects {
    apply plugin: 'java'
    group = 'org.gradle.sample'
    version = '1.0'
}

project(':api') {
    configurations {
        spi
    }
    dependencies {
        compile project(':shared')
    }
    task spiJar(type: Jar) {
        baseName = 'api-spi'
        from sourceSets.main.output
        include('org/gradle/sample/api/**')
    }
    artifacts {
        spi spiJar
    }
}

project(':services:personService') {
    dependencies {
        compile project(':shared')
        compile project(path: ':api', configuration: 'spi')
        testCompile "junit:junit:4.12", project(':api')
    }
}
```

The Java plugin adds per default a jar to your project libraries which contains all the classes. In this example we create an *additional* library containing only the interfaces of the “api” project. We assign this library to a new *dependency configuration*. For the person service we declare that the project should be compiled only against the “api” interfaces but tested with all classes from “api”.

## §

### Depending on the task output produced by another project

Project dependencies model dependencies between modules. Effectively, you are saying that you depend on the main output of another project. In a Java-based project that's usually a JAR file.

Sometimes you may want to depend on an output produced by another task. In turn you'll want to make sure that the task is executed beforehand to produce that very output. Declaring a task dependency from one project to another is a poor way to model this kind of relationship and introduces unnecessary coupling. The

recommended way to model such a dependency is to produce the output, mark it as an "outgoing" artifact or add it to the output of the `main` source set which you can depend on in the consuming project.

Let's say you are working in a multi-project build with the two subprojects `producer` and `consumer`. The subproject `producer` defines a task named `buildInfo` that generates a properties file containing build information e.g. the project version. The attribute `builtBy` takes care of establishing an inferred task dependency. For more information on `builtBy`, see [SourceSetOutput](#).

#### Example 222. Task generating a property file containing build information

##### **build.gradle**

```
task buildInfo(type: BuildInfo) {
    version = project.version
    outputFile = file("${buildDir}/generated-resources/build-info.properties")
}

sourceSets {
    main {
        output.dir(buildInfo.outputFile.parentFile, builtBy: buildInfo)
    }
}
```

The consuming project is supposed to be able to read the properties file at runtime. Declaring a project dependency on the producing project takes care of creating the properties beforehand and making it available to the runtime classpath.

#### Example 223. Declaring a project dependency on the project producing the properties file

##### **build.gradle**

```
dependencies {
    runtime project(':producer')
}
```

In the example above, the consumer now declares a dependency on the outputs of the `producer` project.

## §

### Parallel project execution

With more and more CPU cores available on developer desktops and CI servers, it is important that Gradle is able to fully utilise these processing resources. More specifically, parallel execution attempts to:

- Reduce total build time for a multi-project build where execution is IO bound or otherwise does not consume all available CPU resources.

- Provide faster feedback for execution of small projects without awaiting completion of other projects.

Although Gradle already offers parallel test execution via `Test.setMaxParallelForks(int)` the feature

described in this section is parallel execution at a project level. Parallel execution is an incubating feature. Please use it and let us know how it works for you.

Parallel project execution allows the separate projects in a decoupled multi-project build to be executed in parallel (see also: the section called “Decoupled Projects”). While parallel execution does not strictly require decoupling at configuration time, the long-term goal is to provide a powerful set of features that will be available for fully decoupled projects. Such features include:

the section called “Configuration on demand”.

Configuration of projects in parallel.

Re-use of configuration for unchanged projects.

Project-level up-to-date checks.

Using pre-built artifacts in the place of building dependent projects.

How does parallel execution work? First, you need to tell Gradle to use parallel mode. You can use the `--pa` command line argument or configure your build environment (the section called “Gradle properties”). Unless you provide a specific number of parallel threads, Gradle attempts to choose the right number based on available CPU cores. Every parallel worker exclusively owns a given project while executing a task. Task dependencies are fully supported and parallel workers will start executing upstream tasks first. Bear in mind that the alphabetical ordering of decoupled tasks, as can be seen during sequential execution, is not guaranteed in parallel mode. In other words, in parallel mode tasks will run as soon as their dependencies complete *and a task worker is available to run them*, which may be earlier than they would start during a sequential build. You should make sure that task dependencies and task inputs/outputs are declared correctly to avoid ordering issues.

§

## Decoupled Projects

Gradle allows any project to access any other project during both the configuration and execution phases. While this provides a great deal of power and flexibility to the build author, it also limits the flexibility that Gradle has when building those projects. For instance, this effectively prevents Gradle from correctly building multiple projects in parallel, configuring only a subset of projects, or from substituting a pre-built artifact in place of a project dependency.

Two projects are said to be *decoupled* if they do not directly access each other's project model. Decoupled projects may only interact in terms of declared dependencies: project dependencies (the section called “Project dependencies”) and/or task dependencies (the section called “Task dependencies”). Any other form of project interaction (i.e. by modifying another project object or by reading a value from another project object) causes the projects to be coupled. The consequence of coupling during the configuration phase is that if gradle is invoked with the 'configuration on demand' option, the result of the build can be flawed in several ways. The consequence of coupling during execution phase is that if gradle is invoked with the parallel option, one project task runs too late to influence a task of a project building in parallel. Gradle does not attempt to detect coupling and warn the user, as there are too many possibilities to introduce coupling.

A very common way for projects to be coupled is by using configuration injection (the section called “Cross project configuration”). It may not be immediately apparent, but using key Gradle features like the `allprojects` and `subprojects` keywords automatically cause your projects to be coupled. This is because these keywords are used in a `build.gradle` file, which defines a project. Often this is a “root project” that does nothing more than define common configuration, but as far as Gradle is concerned this root project is still a fully-fledged project, and by using `allprojects` that project is effectively coupled to all other projects. Coupling of the root project to subprojects does not impact 'configuration on demand', but using the `allprojects` and `subprojects` in any subproject's `build.gradle` file will have an impact.

This means that using any form of shared build script logic or configuration injection (`allprojects`, `subprojects`, etc.) will cause your projects to be coupled. As we extend the concept of project decoupling and provide features that take advantage of decoupled projects, we will also introduce new features to help you to solve common use cases (like configuration injection) without causing your projects to be coupled.

In order to make good use of cross project configuration without running into issues for parallel and 'configuration on demand' options, follow these recommendations:

Avoid a subproject's `build.gradle` referencing other subprojects; preferring cross configuration from the root project.

Avoid changing the configuration of other projects at execution time.

§

## Multi-Project Building and Testing

The `build` task of the Java plugin is typically used to compile, test, and perform code style checks (if the CodeQuality plugin is used) of a single project. In multi-project builds you may often want to do all of these tasks across a range of projects. The `buildNeeded` and `buildDependents` tasks can help with this.

Look at Example 220. In this example, the “`:services:personservice`” project depends on both the “`:api`” and “`:shared`” projects. The “`:api`” project also depends on the “`:shared`” project.

Assume you are working on a single project, the “`:api`” project. You have been making changes, but have not built the entire project since performing a clean. You want to build any necessary supporting jars, but only perform code quality and unit tests on the project you have changed. The `build` task does this.

## Example 224. Build and Test Single Project

### Output of `gradle :api:build`

```
> gradle :api:build
> Task :shared:compileJava
> Task :shared:processResources
> Task :shared:classes
> Task :shared:jar
> Task :api:compileJava
> Task :api:processResources
> Task :api:classes
> Task :api:jar
> Task :api:assemble
> Task :api:compileTestJava
> Task :api:processTestResources
> Task :api:testClasses
> Task :api:test
> Task :api:check
> Task :api:build
```

BUILD SUCCESSFUL in 0s

9 actionable tasks: 9 executed

If you have just gotten the latest version of source from your version control system which included changes in other projects that “:api” depends on, you might want to not only build all the projects you depend on, but test them as well. The `buildNeeded` task also tests all the projects from the project lib dependencies of the `testRuntime` configuration.

### Example 225. Build and Test Depended On Projects

#### Output of `gradle :api:buildNeeded`

```
> gradle :api:buildNeeded
> Task :shared:compileJava
> Task :shared:processResources
> Task :shared:classes
> Task :shared:jar
> Task :api:compileJava
> Task :api:processResources
> Task :api:classes
> Task :api:jar
> Task :api:assemble
> Task :api:compileTestJava
> Task :api:processTestResources
> Task :api:testClasses
> Task :api:test
> Task :api:check
> Task :api:build
> Task :shared:assemble
> Task :shared:compileTestJava
> Task :shared:processTestResources
> Task :shared:testClasses
> Task :shared:test
> Task :shared:check
> Task :shared:build
> Task :shared:buildNeeded
> Task :api:buildNeeded

BUILD SUCCESSFUL in 0s
12 actionable tasks: 12 executed
```

You also might want to refactor some part of the “:api” project that is used in other projects. If you make these types of changes, it is not sufficient to test just the “:api” project, you also need to test all projects that depend on the “:api” project. The `buildDependents` task also tests all the projects that have a project lib dependency (in the `testRuntime` configuration) on the specified project.



## Example 226. Build and Test Dependent Projects

### Output of `gradle :api:buildDependents`

```
> gradle :api:buildDependents
> Task :shared:compileJava
> Task :shared:processResources
> Task :shared:classes
> Task :shared:jar
> Task :api:compileJava
> Task :api:processResources
> Task :api:classes
> Task :api:jar
> Task :api:assemble
> Task :api:compileTestJava
> Task :api:processTestResources
> Task :api:testClasses
> Task :api:test
> Task :api:check
> Task :api:build
> Task :services:personService:compileJava
> Task :services:personService:processResources
> Task :services:personService:classes
> Task :services:personService:jar
> Task :services:personService:assemble
> Task :services:personService:compileTestJava
> Task :services:personService:processTestResources
> Task :services:personService:testClasses
> Task :services:personService:test
> Task :services:personService:check
> Task :services:personService:build
> Task :services:personService:buildDependents
> Task :api:buildDependents

BUILD SUCCESSFUL in 0s
17 actionable tasks: 17 executed
```

Finally, you may want to build and test everything in all projects. Any task you run in the root project folder will cause that same named task to be run on all the children. So you can just run “`gradle build`” to build and test all projects.

## §

### Multi Project and `buildSrc`

the section called “Use `buildSrc` to abstract imperative logic” tells us that we can place build logic to be compiled and tested in the special `buildSrc` directory. In a multi project build, there can only be one `buildSrc` directory which must be located in the root directory.

[7] The real use case we had, was using <http://lucene.apache.org/solr>, where you need a separate war for each index you are accessing. That was one reason why we have created a distribution of webapps. The Resin servlet container allows us, to let such a distribution point to a base installation of the servlet container.

[8] We do this here, as it makes the layout a bit easier. We usually put the project specific stuff into the build script of the respective projects.

# Using Gradle Plugins

Gradle at its core intentionally provides very little for real world automation. All of the useful features, like the ability to compile Java code, are added by *plugins*. Plugins add new tasks (e.g. `JavaCompile`), domain objects (e.g. `SourceSet`), conventions (e.g. Java source is located at `src/main/java`) as well as extending core objects and objects from other plugins.

In this chapter we discuss how to use plugins and the terminology and concepts surrounding plugins.

§

## What plugins do

Applying a plugin to a project allows the plugin to extend the project's capabilities. It can do things such as:

Extend the Gradle model (e.g. add new DSL elements that can be configured)

Configure the project according to conventions (e.g. add new tasks or configure sensible defaults)

Apply specific configuration (e.g. add organizational repositories or enforce standards)

By applying plugins, rather than adding logic to the project build script, we can reap a number of benefits. Applying plugins:

Promotes reuse and reduces the overhead of maintaining similar logic across multiple projects

Allows a higher degree of modularization, enhancing comprehensibility and organization

Encapsulates imperative logic and allows build scripts to be as declarative as possible

§

## Types of plugins

There are two general types of plugins in Gradle, *script* plugins and *binary* plugins. Script plugins are additional build scripts that further configure the build and usually implement a declarative approach to manipulating the build. They are typically used within a build although they can be externalized and accessed from a remote location. Binary plugins are classes that implement the `Plugin` interface and adopt a programmatic approach to manipulating the build. Binary plugins can reside within a build script, within the project hierarchy or externally in a plugin jar.

A plugin often starts out as a script plugin (because they are easy to write) and then, as the code becomes

more valuable, it's migrated to a binary plugin that can be easily tested and shared between multiple projects or organizations.

§

## Using plugins

To use the build logic encapsulated in a plugin, Gradle needs to perform two steps. First, it needs to *resolve* the plugin, and then it needs to *apply* the plugin to the target, usually a [Project](#).

*Resolving* a plugin means finding the correct version of the jar which contains a given plugin and adding it the script classpath. Once a plugin is resolved, its API can be used in a build script. Script plugins are self-resolving in that they are resolved from the specific file path or URL provided when applying them. Core binary plugins provided as part of the Gradle distribution are automatically resolved.

*Applying* a plugin means actually executing the plugin's `Plugin.apply(T)` on the Project you want to enhance with the plugin. Applying plugins is *idempotent*. That is, you can safely apply any plugin multiple times without side effects.

The most common use case for using a plugin is to both resolve the plugin and apply it to the current project. Since this is such a common use case, it's recommended that build authors use the plugins DSL to both resolve and apply plugins in one step. The feature is technically still incubating, but it works well, and should be used by most users.

§

## Script plugins

### Example 227. Applying a script plugin

```
build.gradle  
apply from: 'other.gradle'
```

Script plugins are automatically resolved and can be applied from a script on the local filesystem or at a remote location. Filesystem locations are relative to the project directory, while remote script locations are specified with an HTTP URL. Multiple script plugins (of either form) can be applied to a given target.

§

## Binary plugins

You apply plugins by their *plugin id*, which is a globally unique identifier, or name, for plugins. Core Gradle plugins are special in that they provide short names, such as `'java'` for the core [JavaPlugin](#). All other binary plugins must use the fully qualified form of the plugin id (e.g. `com.github.foo.bar`), although some legacy plugins may still utilize a short, unqualified form. Where you put the plugin id depends on whether you are using the plugins DSL or the buildscript block.

§

## Locations of binary plugins

A plugin is simply any class that implements the [Plugin](#) interface. Gradle provides the core plugins (e.g. [Java](#)) as part of its distribution which means they are automatically resolved. However, non-core binary plugins need to be resolved before they can be applied. This can be achieved in a number of ways:

Including the plugin from the plugin portal or a custom repository using the plugins DSL (see the section called “Applying plugins with the plugins DSL”).

Including the plugin from an external jar defined as a buildscript dependency (see the section called “Applying plugins with the buildscript block”).

Defining the plugin as a source file under the buildSrc directory in the project (see the section called “Use [buildSrc](#) to abstract imperative logic”).

Defining the plugin as an inline class declaration inside a build script.

For more on defining your own plugins, see *Writing Custom Plugins*.

§

## Applying plugins with the plugins DSL

**Note:** The plugins DSL is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The new plugins DSL provides a succinct and convenient way to declare plugin dependencies. It works with the Gradle plugin portal to provide easy access to both core and community plugins. The plugins DSL block configures an instance of [PluginDependenciesSpec](#).

To apply a core plugin, the short name can be used:

### Example 228. Applying a core plugin

```
build.gradle
plugins {
    id 'java'
}
```

To apply a community plugin from the portal, the fully qualified plugin id must be used:

### Example 229. Applying a community plugin

```
build.gradle
plugins {
    id 'com.jfrog.bintray' version '0.4.1'
}
```

See [PluginDependenciesSpec](#) for more information on using the Plugin DSL.

§

#### Limitations of the plugins DSL

This way of adding plugins to a project is much more than a more convenient syntax. The plugins DSL is processed in a way which allows Gradle to determine the plugins in use very early and very quickly. This allows Gradle to do smart things such as:

Optimize the loading and reuse of plugin classes.

Allow different plugins to use different versions of dependencies.

Provide editors detailed information about the potential properties and values in the buildscript for editing assistance.

This requires that plugins be specified in a way that Gradle can easily and quickly extract, before executing the rest of the build script. It also requires that the definition of plugins to use be somewhat static.

There are some key differences between the new plugin mechanism and the “traditional” `apply()` method mechanism. There are also some constraints, some of which are temporary limitations while the mechanism is still being developed and some are inherent to the new approach.

§

#### Constrained Syntax

The new `plugins {}` block does not support arbitrary Groovy code. It is constrained, in order to be idempotent (produce the same result every time) and side effect free (safe for Gradle to execute at any time).

The form is:

```
plugins {  
    id «plugin id» version «plugin version» [apply «false»]  
}
```

Where `«plugin version»` and `«plugin id»` must be constant, literal, strings and the `apply` statement with a `boolean` can be used to disable the default behavior of applying the plugin immediately (e.g. you want to apply it only in `subprojects`). No other statements are allowed; their presence will cause a compilation error.

The `plugins {}` block must also be a top level statement in the buildscript. It cannot be nested inside another construct (e.g. an if-statement or for-loop).

§

Can only be used in build scripts

The `plugins {}` block can currently only be used in a project’s build script. It cannot be used in script plugins, the `settings.gradle` file or init scripts.

*Future versions of Gradle will remove this restriction.*

If the restrictions of the new syntax are prohibitive, the recommended approach is to apply plugins using the `buildscript {}` block.

§

#### Applying plugins to subprojects

If you have a multi-project build, you probably want to apply plugins to some or all of the subprojects in your build, but not to the `root` or `master` project. The default behavior of the `plugins {}` block is to immediately resolve *and* apply the plugins. But, you can use the `apply false` syntax to tell Gradle not to apply the plugin to the current project and then use `apply plugin: «plugin id»` in the `subprojects` block:

#### Example 230. Applying plugins only on certain subprojects.

##### **settings.gradle**

```
include 'helloA'
include 'helloB'
include 'goodbyeC'
```

##### **build.gradle**

```
plugins {
    id "org.gradle.sample.hello" version "1.0.0" apply false
    id "org.gradle.sample.goodbye" version "1.0.0" apply false
}

subprojects { subproject ->
    if (subproject.name.startsWith("hello")) {
        apply plugin: 'org.gradle.sample.hello'
    }
    if (subproject.name.startsWith("goodbye")) {
        apply plugin: 'org.gradle.sample.goodbye'
    }
}
```

If you then run `gradle hello` you'll see that only the `helloA` and `helloB` subprojects had the `hello` plugin applied.

```
gradle/subprojects/docs/src/samples/plugins/multiproject $> gradle hello
Parallel execution is an incubating feature.
:helloA:hello
:helloB:hello
Hello!
Hello!

BUILD SUCCEEDED
```

§

## Plugin Management

**Note:** The `pluginManagement {}` DSL is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The `pluginManagement {}` block may only appear in either the `settings.gradle` file, where it must be the first block in the file, or in an Initialization Script.

### Example 231. Configuring pluginManagement per-project and globally

#### **settings.gradle**

```
pluginManagement {  
    resolutionStrategy {  
    }  
    repositories {  
    }  
}
```

#### **init.gradle**

```
settingsEvaluated { settings ->  
    settings.pluginManagement {  
        resolutionStrategy {  
        }  
        repositories {  
        }  
    }  
}
```

§

## Custom Plugin Repositories

By default, the `plugins {}` DSL resolves plugins from the public Gradle Plugin Portal. Many build authors would also like to resolve plugins from private Maven or Ivy repositories because the plugins contain proprietary implementation details, or just to have more control over what plugins are available to their builds.

To specify custom plugin repositories, use the `repositories {}` block inside `pluginManagement {}`:



### Example 232. Using plugins from custom plugin repositories.

#### settings.gradle

```
pluginManagement {  
    repositories {  
        maven {  
            url 'maven-repo'  
        }  
        gradlePluginPortal()  
        ivy {  
            url 'ivy-repo'  
        }  
    }  
}
```

This tells Gradle to first look in the Maven repository at `maven-repo` when resolving plugins and then to check the Gradle Plugin Portal if the plugins are not found in the Maven repository. If you don't want the Gradle Plugin Portal to be searched, omit the `gradlePluginPortal()` line. Finally, the Ivy repository at `ivy` will be checked.

§  
Plugin Resolution Rules

Plugin resolution rules allow you to modify plugin requests made in `plugins {}` blocks, e.g. changing the requested version or explicitly specifying the implementation artifact coordinates.

To add resolution rules, use the `resolutionStrategy {}` inside the `pluginManagement {}` block:

### Example 233. Plugin resolution strategy.

#### settings.gradle

```
pluginManagement {  
    resolutionStrategy {  
        eachPlugin {  
            if (requested.id.namespace == 'org.gradle.sample') {  
                useModule('org.gradle.sample:sample-plugins:1.0.0')  
            }  
        }  
    }  
    repositories {  
        maven {  
            url 'maven-repo'  
        }  
        gradlePluginPortal()  
        ivy {  
            url 'ivy-repo'  
        }  
    }  
}
```

This tells Gradle to use the specified plugin implementation artifact instead of using its built-in default mapping from plugin ID to Maven/Ivy coordinates.

Custom Maven and Ivy plugin repositories must contain plugin marker artifacts in addition to the artifacts which actually implement the plugin. For more information on publishing plugins to custom repositories read *Gradle Plugin Development Plugin*.

See [PluginManagementSpec](#) for complete documentation for using the `pluginManagement {}` block.

§

#### Plugin Marker Artifacts

Since the `plugins {}` DSL block only allows for declaring plugins by their globally unique plugin `id` and `version` properties, Gradle needs a way to look up the coordinates of the plugin implementation artifact. To do so, Gradle will look for a Plugin Marker Artifact with the coordinates `plugin.id:plugin.id.gradle.plugin`. This marker needs to have a dependency on the actual plugin implementation. Publishing these markers is automated by the `java-gradle-plugin`.


For example, the following complete sample from the `sample-plugins` project shows how to publish a `org` plugin and a `org.gradle.sample.goodbye` plugin to both an Ivy and Maven repository using the combination of the `java-gradle-plugin`, the `maven-publish` plugin, and the `ivy-publish` plugin.

### Example 234. Complete Plugin Publishing Sample

#### build.gradle

```
plugins {  
    id 'java-gradle-plugin'  
    id 'maven-publish'  
    id 'ivy-publish'  
}  
  
group 'org.gradle.sample'  
version '1.0.0'  
  
gradlePlugin {  
    plugins {  
        hello {  
            id = "org.gradle.sample.hello"  
            implementationClass = "org.gradle.sample.hello.HelloPlugin"  
        }  
        goodbye {  
            id = "org.gradle.sample.goodbye"  
            implementationClass = "org.gradle.sample.goodbye.GoodbyePlugin"  
        }  
    }  
}  
  
publishing {  
    repositories {  
        maven {  
            url "../consuming/maven-repo"  
        }  
        ivy {  
            url "../consuming/ivy-repo"  
        }  
    }  
}
```

Running `gradle publish` in the sample directory causes the following repo layouts to exist:

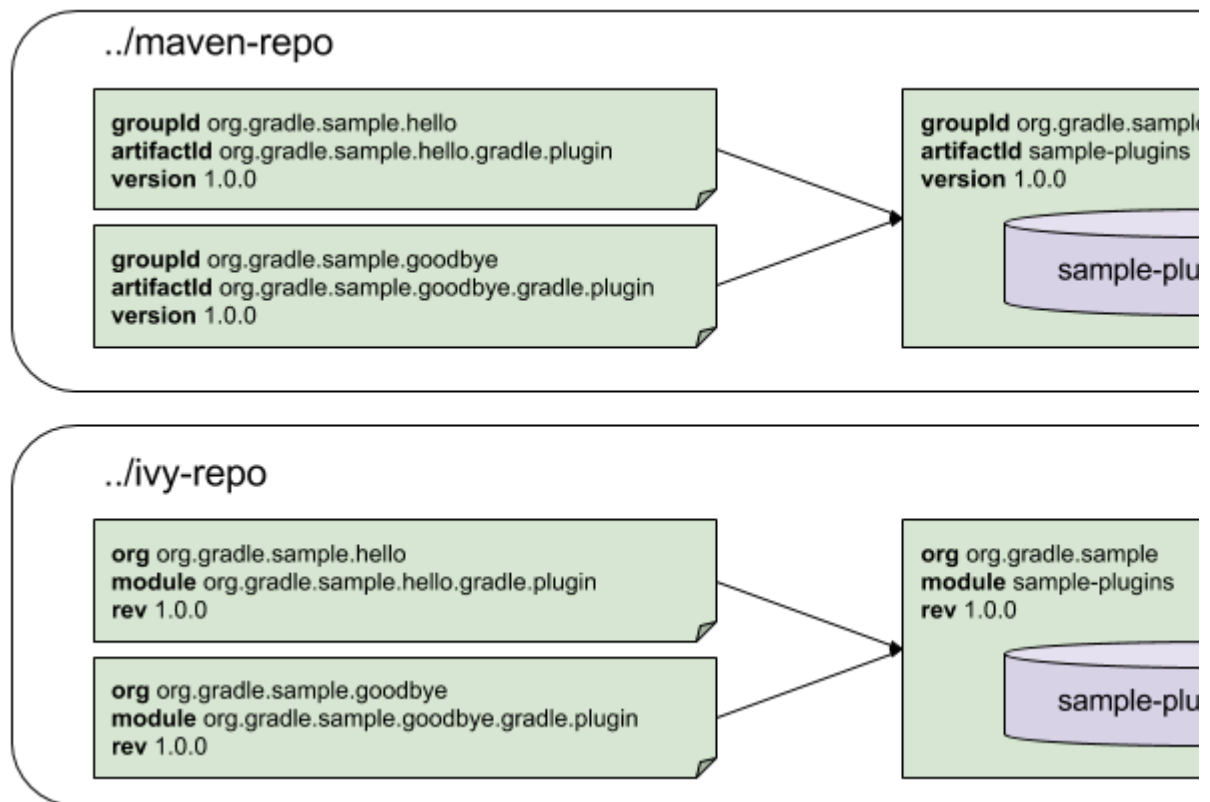

§

## Legacy Plugin Application

With the introduction of the plugins DSL, users should have little reason to use the legacy method of applying plugins. It is documented here in case a build author cannot use the plugins DSL due to restrictions in how it currently works.

§

### Applying Binary Plugins

#### Example 235. Applying a binary plugin

```
build.gradle
apply plugin: 'java'
```

Plugins can be applied using a *plugin id*. In the above case, we are using the short name 'java' to apply the [JavaPlugin](#).

Rather than using a plugin id, plugins can also be applied by simply specifying the class of the plugin:

#### Example 236. Applying a binary plugin by type

```
build.gradle
apply plugin: JavaPlugin
```

The `JavaPlugin` symbol in the above sample refers to the [JavaPlugin](#). This class does not strictly need to be imported as the `org.gradle.api.plugins` package is automatically imported in all build scripts

(see the section called “Default imports”). Furthermore, it is not necessary to append `.class` to identify a class literal in Groovy as it is in Java.

§

Applying plugins with the `buildscript` block

Binary plugins that have been published as external jar files can be added to a project by adding the plugin to the build script classpath and then applying the plugin. External jars can be added to the build script classpath using the `buildscript {}` block as described in the section called “External dependencies for the build script”.

#### Example 237. Applying a plugin with the `buildscript` block

**build.gradle**

```
buildscript {
    repositories {
        jcenter()
    }
    dependencies {
        classpath "com.jfrog.bintray.gradle:gradle-bintray-plugin:0.4.1"
    }
}

apply plugin: "com.jfrog.bintray"
```

§

## Finding community plugins

Gradle has a vibrant community of plugin developers who contribute plugins for a wide variety of capabilities. The Gradle plugin portal provides an interface for searching and exploring community plugins.

§

## More on plugins

This chapter aims to serve as an introduction to plugins and Gradle and the role they play. For more information on the inner workings of plugins, see *Writing Custom Plugins*.

# Standard Gradle plugins

There are a number of plugins included in the Gradle distribution. These are listed below.

## §

### Language plugins

These plugins add support for various languages which can be compiled for and executed in the JVM.

**Table 10. Language plugins**

Plugin	Automatically applies	Works with	Description
<code>java</code>	<code>java-base</code>	-	Adds Java compilation, testing and bundling capabilities to a project. It serves as the basis for many of the other Gradle plugins. See also <i>Java Quickstart</i> .
<code>groovy</code>	<code>java, groovy-base</code>		Adds support for building Groovy projects. See also <i>Groovy Quickstart</i> .
<code>scala</code>	<code>java, scala-base</code>		Adds support for building Scala projects.
<code>antlr</code>	<code>java</code>	-	Adds support for generating parsers using Antlr.

## §

### Incubating language plugins

These plugins add support for various languages:

**Table 11. Language plugins**

Plugin Id	Automatically applies	Works with	Description
<code>ssembler</code>	-	-	Adds native assembly language capabilities to a project.
	-	-	Adds C source compilation capabilities to a project.
<code>pp</code>	-	-	Adds C++ source compilation capabilities to a project.
<code>bjective-c</code>	-	-	Adds Objective-C source compilation capabilities to a project.
<code>bjective-cpp</code>	-	-	Adds Objective-C++ source compilation capabilities to a project.
<code>indows-resources</code>	-	-	Adds support for including Windows resources in native binaries.

## §

### Integration plugins

These plugins provide some integration with various runtime technologies.

**Table 12. Integration plugins**

Plugin Id	Automatically applies	Works with	Description
<code>application</code>	java, distribution		Adds tasks for running and bundling a Java project as a command-line application.
<code>war</code>	-	java	Adds support for building J2EE applications.
<code>ivy-publish</code>	-	application, distribution, java, war	Provides a new DSL to support publishing artifacts to Ivy repositories, which improves on the existing DSL.
<code>maven-publish</code>	-	application, distribution, java, war	Provides a new DSL to support publishing artifacts to Maven repositories, which improves on the existing DSL.
<code>maven</code>	-	java, war	Adds support for publishing artifacts to Maven repositories using the <i>original</i> publishing mechanism available in Gradle 1.0. See also <i>Legacy publishing</i> .
<code>osgi</code>	java-base	java	Adds support for building OSGi bundles.
<code>webapp</code>	java	-	Adds support for assembling web application WAR files. See also <i>Web Application Quickstart</i> .

## §

### Incubating integration plugins

These plugins provide some integration with various runtime technologies.

**Table 13. Incubating integration plugins**

Plugin Id	Automatically applies	Works with	Description
<code>distribution</code>	-	-	Adds support for building ZIP and TAR distributions.
<code>java-library-distribution</code>	java, distribution		Adds support for building ZIP and TAR distributions for a Java library.



§

## Software development plugins

These plugins provide help with your software development process.

**Table 14. Software development plugins**

Plugin Id	Automatically applies	Works with	Description
<code>announce</code>	-	-	Publish messages to your favourite platforms, such as Twitter or Growl.
<code>build-announcements</code>	<code>announce</code>	-	Sends local announcements to your desktop about interesting events in the build lifecycle.
<code>checkstyle</code>	<code>java-base</code>	-	Performs quality checks on your project's Java source files using Checkstyle and generates reports from these checks.
<code>codenarc</code>	<code>groovy-base</code>	-	Performs quality checks on your project's Groovy source files using CodeNarc and generates reports from these checks.
<code>eclipse</code>	-	<code>java, groovy, scala</code>	Generates files that are used by Eclipse IDE, thus making it possible to import the project into Eclipse. See also <i>Java Quickstart</i> .
<code>eclipse-wtp</code>	-	<code>ear, war</code>	Does the same as the eclipse plugin plus generates eclipse WTP (Web Tools Platform) configuration files. After importing to eclipse your war/ear projects should be configured to work with WTP. See also <i>Java Quickstart</i> .
<code>findbugs</code>	<code>java-base</code>	-	Performs quality checks on your project's Java source files using FindBugs and generates reports from these checks.
<code>idea</code>	-	<code>java</code>	Generates files that are used by IntelliJ IDEA IDE, thus making it possible to import the project into IDEA.
<code>jdepend</code>	<code>java-base</code>	-	Performs quality checks on your project's source files using JDepend and generates reports from these checks.
<code>pmd</code>	<code>java-base</code>	-	Performs quality checks on your project's Java source files using PMD and generates reports from these checks.
<code>project-report</code>	<code>reporting-base</code>	-	Generates reports containing useful information about your Gradle build.
<code>signing</code>	<code>base</code>	-	Adds the ability to digitally sign built files and artifacts.

§

## Incubating software development plugins

These plugins provide help with your software development process.

**Table 15. Software development plugins**

Plugin Id	Automatically applies	Works with	Description
<code>build-dashboard</code>	reporting-base	-	Generates build dashboard report.
<code>unit</code>	-	-	Adds support for running CUnit tests.
<code>jacoco</code>	reporting-base	java	Provides integration with the JaCoCo code coverage library for Java.
<code>visual-studio</code>	-	native language plugins	Adds integration with Visual Studio.
<code>java-gradle-plugin</code>	java		Assists with development of Gradle plugins by providing standard plugin build configuration and validation.

§

## Base plugins

These plugins form the basic building blocks which the other plugins are assembled from. They are available for you to use in your build files, and are listed here for completeness. However, be aware that they are not yet considered part of Gradle's public API. As such, these plugins are not documented in the user guide. You might refer to their API documentation to learn more about them.

**Table 16. Base plugins**

Plugin Id	Description
base	<p>Adds the standard lifecycle tasks and configures reasonable defaults for the archive tasks:</p> <ul style="list-style-type: none"> <li>• adds build <i>ConfigurationName</i> tasks. Those tasks assemble the artifacts belonging to the specified configuration.</li> <li>• adds upload <i>ConfigurationName</i> tasks. Those tasks assemble and upload the artifacts belonging to the specified configuration.</li> <li>• configures reasonable default values for all archive tasks (e.g. tasks that inherit from <a href="#">AbstractArchiveTask</a>). For example, the archive tasks are tasks of types: <a href="#">Jar</a>, <a href="#">Tar</a>, <a href="#">Zip</a>. Specifically, <code>destinationDir</code>, <code>baseName</code> and <code>version</code> properties of the archive tasks are preconfigured with defaults. This is extremely useful because it drives consistency across projects; the consistency regarding naming conventions of archives and their location after the build completed.</li> </ul>
java-base	Adds the source sets concept to the project. Does not add any particular source sets.
groovy-base	Adds the Groovy source sets concept to the project.
scala-base	Adds the Scala source sets concept to the project.
reporting-base	Adds some shared convention properties to the project, relating to report generation.

## §

### Third party plugins

You can find a list of external plugins at the [Gradle Plugins site](#).

# The Project Report Plugin

The Project report plugin adds some tasks to your project which generate reports containing useful information about your build. These tasks generate the same content that you get by executing the `tasks`, `dependencies`, and `properties` tasks from the command line (see the section called “Project reporting”). In contrast to the command line reports, the report plugin generates the reports into a file. There is also an aggregating task that depends on all report tasks added by the plugin.

We plan to add much more to the existing reports and create additional ones in future releases of Gradle.

§

## Usage

To use the Project report plugin, include the following in your build script:

```
apply plugin: 'project-report'
```

§

## Tasks

The project report plugin defines the following tasks:

**Table 17. Project report plugin - tasks**

task name	Depends on	Type	Description
dependencyReport	-	DependencyReportTask	Generates the project dependency report.
htmlDependencyReport	-	HtmlDependencyReportTask	Generates an HTML dependency and dependency insight report for the project or a set of projects.
propertyReport	-	PropertyReportTask	Generates the project property report.
taskReport	-	TaskReportTask	Generates the project task report.
projectReport	dependencyReport, propertyReport, taskReport, htmlDependencyReport	Task	Generates all project reports.

§

## Project layout

The project report plugin does not require any particular project layout.

§

## Dependency management

The project report plugin does not define any dependency configurations.

§

## Convention properties

The project report defines the following convention properties:

**Table 18. Project report plugin - convention properties**

property name	Type	Default value	Description
<code>reportsDirName</code>	String	<code>reports</code>	The name of the directory to generate reports into, relative to the build directory.
<code>reportsDir</code>	File (read-only)	<code>buildDir/reportsDirName</code>	The directory to generate reports into.
<code>projects</code>	Set<Project>	A one element set with the project the plugin was applied to.	The projects to generate the reports for.
<code>projectReportDirName</code>	String	<code>project</code>	The name of the directory to generate the project report into, relative to the reports directory.
<code>projectReportDir</code>	File (read-only)	<code>reportsDir/projectReportDirName</code>	The directory to generate the project report into.

These convention properties are provided by a convention object of type [ProjectReportsPluginConvention](#).

# The Build Dashboard Plugin

**Note:** The build dashboard plugin is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The Build Dashboard plugin can be used to generate a single HTML dashboard that provides a single point of access to all of the reports generated by a build.

§

## Usage

To use the Build Dashboard plugin, include the following in your build script:

### Example 238. Using the Build Dashboard plugin

**build.gradle**

```
apply plugin: 'build-dashboard'
```

Applying the plugin adds the `buildDashboard` task to your project. The task aggregates the reports for all tasks that implement the [Reporting](#) interface from *all projects* in the build. It is typically only applied to the root project.

The `buildDashboard` task does not depend on any other tasks. It will only aggregate the reporting tasks that are independently being executed as part of the build run. To generate the build dashboard, simply include this task in the list of tasks to execute. For example, “`gradle buildDashboard build`” will generate a dashboard for all of the reporting tasks that are dependents of the `build` task.

§

## Tasks

The Build Dashboard plugin adds the following task to the project:

**Table 19. Build Dashboard plugin - tasks**

task name	Depends on	Type	Description
<code>buildDashboard</code>	-	<a href="#">GenerateBuildDashboard</a>	Generates build dashboard report.



§

## Project layout

The Build Dashboard plugin does not require any particular project layout.

§

## Dependency management

The Build Dashboard plugin does not define any dependency configurations.

§

## Configuration

You can influence the location of build dashboard plugin generation via [ReportingExtension](#).

# Comparing Builds

**Note:** Build comparison support is an incubating feature. This means that it is incomplete and not yet at regular Gradle production quality. This also means that this Gradle User Guide chapter is a work in progress.

Gradle provides support for comparing the *outcomes* (e.g. the produced binary archives) of two builds. There are several reasons why you may want to compare the outcomes of two builds. You may want to compare:

A build with a newer version of Gradle than it's currently using (i.e. upgrading the Gradle version).

A Gradle build with a build executed by another tool such as Apache Ant, Apache Maven or something else (i.e. migrating to Gradle).

The same Gradle build, with the same version, before and after a change to the build (i.e. testing build changes).

By comparing builds in these scenarios you can make an informed decision about the Gradle upgrade, migration to Gradle or build change by understanding the differences in the outcomes. The comparison process produces a HTML report outlining which outcomes were found to be identical and identifying the differences between non-identical outcomes.

## §

### Definition of terms

The following are the terms used for build comparison and their definitions.

#### “Build”

In the context of build comparison, a build is not necessarily a Gradle build. It can be any invokable “process” that produces observable “outcomes”. At least one of the builds in a comparison will be a Gradle build.

#### “Build Outcome”

Something that happens in an observable manner during a build, such as the creation of a zip file or test execution. These are the things that are compared.

#### “Source Build”

The build that comparisons are being made against, typically the build in its “current” state. In other

words, the left hand side of the comparison.

#### **“Target Build”**

The build that is being compared to the source build, typically the “proposed” build. In other words, the right hand side of the comparison.

#### **“Host Build”**

The Gradle build that executes the comparison process. It may be the same project as either the “target” or “source” build or may be a completely separate project. It does not need to be the same Gradle version as the “source” or “target” builds. The host build must be run with Gradle 1.2 or newer.

#### **“Compared Build Outcome”**

Build outcomes that are intended to be logically equivalent in the “source” and “target” builds, and are therefore meaningfully comparable.

#### **“Uncompared Build Outcome”**

A build outcome is uncompared if a logical equivalent from the other build cannot be found (e.g. a build produces a zip file that the other build does not).

#### **“Unknown Build Outcome”**

A build outcome that cannot be understood by the host build. This can occur when the source or target build is a newer Gradle version than the host build and that Gradle version exposes new outcome types. Unknown build outcomes can be compared in so far as they can be identified to be logically equivalent to an unknown build outcome in the other build, but no meaningful comparison of what the build outcome actually is can be performed. Using the latest Gradle version for the host build will avoid encountering unknown build outcomes.

## §

### Current Capabilities

As this is an incubating feature, a limited set of the eventual functionality has been implemented at this time.

## §

#### Supported builds

Only support for comparing Gradle builds is available at this time. Both the source and target build must execute with Gradle newer or equal to version 1.0. The host build must be at least version 1.2. If the host build is run with version 3.0 or newer, source and target builds must be at least version 1.2. If the host build is run with a version older than 2.0, source and target builds must be older than version 3.0. So if you for example want to compare a build under version 1.1 with a build under version 3.0, you have to execute the host build with a 2.x version.

Future versions will provide support for executing builds from other build systems such as Apache Ant or Apache Maven, as well as support for executing arbitrary processes (e.g. shell script based builds)

§

## Supported build outcomes

Only support for comparing build outcomes that are `zip` archives is supported at this time. This includes `jar`, `war` and `ear` archives.

Future versions will provide support for comparing outcomes such as test execution (i.e. which tests were executed, which tests failed, etc.)

§

## Comparing Gradle Builds

The `compare-gradle-builds` plugin can be used to facilitate a comparison between two Gradle builds. The plugin adds a `CompareGradleBuilds` task named “`compareGradleBuilds`” to the project. The configuration of this task specifies what is to be compared. By default, it is configured to compare the current build with itself using the current Gradle version by executing the tasks: “`clean assemble`”.

```
apply plugin: 'compare-gradle-builds'
```

This task can be configured to change what is compared.

```
compareGradleBuilds {  
    sourceBuild {  
        projectDir "/projects/project-a"  
        gradleVersion "1.1"  
    }  
    targetBuild {  
        projectDir "/projects/project-b"  
        gradleVersion "1.2"  
    }  
}
```

The example above specifies a comparison between two different projects using two different Gradle versions.

§

## Trying Gradle upgrades

You can use the build comparison functionality to very quickly try a new Gradle version with your build.

To try your current build with a different Gradle version, simply add the following to the `build.gradle` of the *root project*.

```
apply plugin: 'compare-gradle-builds'

compareGradleBuilds {
    targetBuild.gradleVersion = "«gradle version»"
}
```

Then simply execute the `compareGradleBuilds` task. You will see the console output of the “source” and “target” builds as they are executing.

§

### The comparison “result”

If there are any differences between the *compared outcomes*, the task will fail. The location of the HTML report providing insight into the comparison will be given. If all compared outcomes are found to be identical, and there are no uncompared outcomes, and there are no unknown build outcomes, the task will succeed.

You can configure the task to not fail on compared outcome differences by setting the `ignoreFailures` property to true.

```
compareGradleBuilds {
    ignoreFailures = true
}
```

§

### Which archives are compared?

For an archive to be a candidate for comparison, it must be added as an artifact of the archives configuration. Take a look at *Legacy publishing* for more information on how to configure and add artifacts.

The archive must also have been produced by a `Zip`, `Jar`, `War`, `Ear` task. Future versions of Gradle will support increased flexibility in this area.

# Publishing

The vast majority of software projects build something that aims to be consumed in some way. It could be a library that other software projects use or it could be an application for end users. *Publishing* is the process by which the thing being built is made available to consumers.

In Gradle, that process looks like this:

Define what to publish

Define where to publish it to


Do the publishing

Each of these steps is dependent on the type of repository to which you want to publish artifacts. The two most common types are Maven-compatible and Ivy-compatible repositories, or Maven and Ivy repositories for short.

**Note:** Looking for information on upload tasks and the `archives` configuration? See the *Legacy publishing* chapter.

Gradle makes it easy to publish to these types of repository by providing some prepackaged infrastructure in the form of the Maven Publish Plugin and the Ivy Publish Plugin. These plugins allow you to configure what to publish and perform the publishing with a minimum of effort.

**Figure 14. The publishing process**

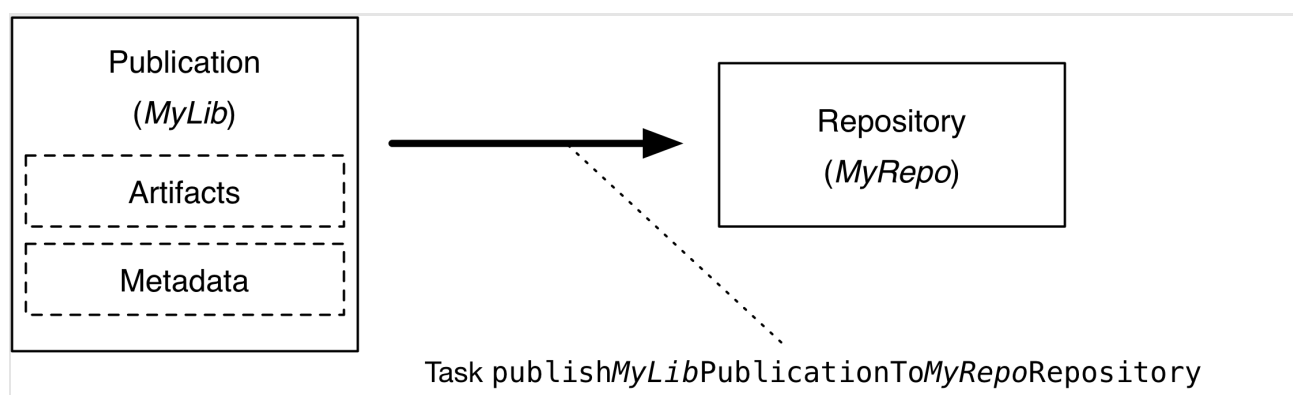

Let's take a look at those steps in more detail:

## What to publish

Gradle needs to know what files and information to publish so that consumers can use your project. This is typically a combination of artifacts and metadata that Gradle calls a *publication*. Exactly what a publication contains depends on the type of repository it's being published to.

For example, a publication destined for a Maven repository includes one or more artifacts — typically built by the project — plus a POM file describing the primary artifact and its dependencies. The primary artifact is typically the project's production JAR and secondary artifacts might consist of "-sources" and "-javadoc" JARs.

## Where to publish

Gradle needs to know where to publish artifacts so that consumers can get hold of them. This is done via repositories, which store and make available all sorts of artifact. Gradle also needs to interact with the repository, which is why you must provide the type of the repository and its location.

## How to publish

Gradle automatically generates publishing tasks for all possible combinations of publication and repository, allowing you to publish any artifact to any repository. If you're publishing to a Maven repository, the tasks are of type `PublishToMavenRepository`, while for Ivy repositories the tasks are of type `PublishToIvyRepository`.

What follows is a practical example that demonstrates the entire publishing process.

## §

### Setting up basic publishing

The first step in publishing, irrespective of your project type, is to apply the appropriate publishing plugin. As mentioned in the introduction, Gradle supports both Maven and Ivy repositories via the following plugins:

Maven Publish Plugin

Ivy Publish Plugin

These provide the specific publication and repository classes needed to configure publishing for the corresponding repository type. Since Maven repositories are the most commonly used ones, they will be the basis for this example and for the other samples in the chapter. Don't worry, we will explain how to adjust individual samples for Ivy repositories.

Let's assume we're working with a simple Java library project, so only the following plugins are applied:

### Example 239. Applying the necessary plugins

```
build.gradle
plugins {
    id 'java-library'
    id 'maven-publish'
}
```

Once the appropriate plugin has been applied, you can configure the publications and repositories. For this example, we want to publish the project's production JAR file — the one produced by the `jar` task — to a custom, Maven repository. We do that with the following `publishing {}` block, which is backed by `PublishingExtension`:

### Example 240. Configuring a Java library for publishing

```
build.gradle
group = 'org.example'
version = '1.0'

publishing {
    publications {
        myLibrary(MavenPublication) {
            from components.java
        }
    }

    repositories {
        maven {
            name = 'myRepo'
            url = "file://${buildDir}/repo"
        }
    }
}
```

This defines a publication called "myLibrary" that can be published to a Maven repository by virtue of its type: `MavenPublication`. This publication consists of just the production JAR artifact and its metadata, which combined are represented by the `java` component of the project.

**Note:** Components are the standard way of defining a publication. They are provided by plugins, usually of the language or platform variety. For example, the Java Plugin defines the `components.java` `SoftwareComponent`, while the War Plugin defines `components.web`.

The example also defines a file-based Maven repository with the name "myRepo". Such a file-based repository is convenient for a sample, but real-world builds typically work with HTTPS-based repository servers, such as Maven Central or an internal company server.

**Note:** You may define one, and only one, repository without a name. This translates to an implicit name of "Maven" for Maven repositories and "Ivy" for Ivy repositories. All other repository definitions



must be given an explicit name.

In combination with the project's `group` and `version`, the publication and repository definitions provide everything that Gradle needs to publish the project's production JAR. Gradle will then create a dedicated `publish` task that does just that. Its name is based on the template `publishPubNamePublicationToRepoNameRe`. See the appropriate publishing plugin's documentation for more details on the nature of this task and any other tasks that may be available to you.

You can either execute the individual publishing tasks directly, or you can execute `publish`, which will run all the available publishing tasks. In this example, `publish` will just run `publishMyLibraryPublication`.

**Note:** Basic publishing to an Ivy repository is very similar: you simply use the Ivy Publish Plugin, replace `MavenPublication` with `IvyPublication`, and use `ivy` instead of `maven` in the repository definition.

There are differences between the two types of repository, particularly around the extra metadata that each support — for example, Maven repositories require a POM file while Ivy ones have their own metadata format — so see the plugin chapters for comprehensive information on how to configure both publications and repositories for whichever repository type you're working with.

That's everything for the basic use case. However, many projects need more control over what gets published, so we look at several common scenarios in the following sections.

## §

### Adding custom artifacts to a publication

Users often need to include additional artifacts with a publication, one of the most common examples being that of `"-sources"` and `"-javadoc"` JARs for JVM libraries. This is easy to do for both Maven- and Ivy-compatible repositories via the `artifact` configuration.

The following sample configures `"-sources"` and `"-javadoc"` JARs for a Java project and attaches them to the main (Maven) publication, i.e. the production JAR:

### Example 241. Adding an additional archive artifact to a MavenPublication

#### build.gradle

```
task sourcesJar(type: Jar) {
    classifier = 'sources'
    from sourceSets.main.allJava
}

task javadocJar(type: Jar) {
    classifier = 'javadoc'
    from javadoc.destinationDir
}

publishing {
    publications {
        mavenJava(MavenPublication) {
            from components.java

            artifact sourcesJar
            artifact javadocJar
        }
    }
}
```

There are several important things to note about the sample:

The `artifact()` method accepts archive tasks as an argument — like `sourcesJar` in the sample — as well as any type of argument accepted by `Project.file(java.lang.Object)`, such as a `File` instance or string file path.

Publishing plugins support different artifact configuration properties, so always check the plugin documentation for more details. The `classifier` and `extension` properties are supported by both the Maven Publish Plugin and the Ivy Publish Plugin.

Custom artifacts need to be distinct within a publication, typically via a unique combination of `classifier` and `extension`. See the documentation for the plugin you're using for the precise requirements.

If you use `artifact()` with an archive task, Gradle automatically populates the artifact's metadata with the `classifier` and `extension` properties from that task. That's why the above sample does not specify those properties in the artifact configurations.

When you're attaching extra artifacts to a publication, remember that they are *secondary* artifacts that support a *primary* artifact. The metadata that a publication defines — such as dependency information — is associated with that primary artifact only. Thinking about publications in this way should help you determine whether you should be adding custom artifacts to an existing publication, or defining a new publication.

## §

### Publishing a custom primary artifact (no component)

If your build produces a primary artifact that isn't supported by a predefined component, then you will need to configure a custom artifact. This isn't much different to adding a custom artifact to an existing publication. There are just a couple of extra considerations:

You may want to make the artifact available to other projects in the build

You will need to manually construct the necessary metadata for publishing

Inter-project dependencies have nothing to do with publishing, but both features typically apply to the same set of artifacts in a Gradle project. So how do you tie them together?

You start by defining a custom artifact and attaching it to a Gradle configuration of your choice. The following sample defines an RPM artifact that is produced by an `rpm` task (not shown) and attaches that artifact to the `main` configuration:

#### Example 242. Defining a custom artifact for a configuration

```
build.gradle
def rpmFile = file("$buildDir/rpms/my-package.rpm")
def rpmArtifact = artifacts.add('archives', rpmFile) {
    type 'rpm'
    builtBy 'rpm'
}
```

The `artifacts.add()` method — from `ArtifactHandler` — returns an artifact object of type `PublishArtifact` that can then be used in defining a publication, as shown in the following sample:

#### Example 243. Attaching a custom `PublishArtifact` to a publication

```
build.gradle
publishing {
    publications {
        maven(MavenPublication) {
            artifact rpmArtifact
        }
    }
}
```

Now you can publish the RPM as well as depend on it from another project using the `project(path: ':my')` syntax.

**Note:** There is currently no easy way to define dependency information for a custom artifact.

The `groupId` and `artifactId` properties are specific to Maven publications. See `IvyPublication` for the relevant Ivy properties.

## §

### Signing artifacts

The Signing Plugin can be used to sign all artifacts and metadata files that make up a publication, including Maven POM files and Ivy module descriptors. In order to use it:

Apply the Signing Plugin

Configure the signatory credentials — follow the link to see how

Specify the publications you want signed

Here's an example that configures the plugin to sign the `mavenJava` publication:

#### Example 244. Signing a publication

##### **build.gradle**

```
signing {  
    sign publishing.publications.mavenJava  
}
```

This will create a `Sign` task for each publication you specify and wire all `publishPubNamePublicationToMavenRepository` tasks to depend on it. Thus, publishing any publication will automatically create and publish the signatures for its artifacts and metadata, as you can see from this output:

#### Example 245. Sign and publish a project

##### Output of **gradle publish**

```
> gradle publish  
> Task :generatePomFileForMavenJavaPublication  
> Task :compileJava  
> Task :processResources  
> Task :classes  
> Task :jar  
> Task :javadoc  
> Task :javadocJar  
> Task :sourcesJar  
> Task :signMavenJavaPublication  
> Task :publishMavenJavaPublicationToMavenRepository  
> Task :publish
```

BUILD SUCCESSFUL in 0s

9 actionable tasks: 9 executed

## §

### Restricting publications to specific repositories

When you have defined multiple publications or repositories, you often want to control which publications are published to which repositories. For instance, consider the following sample that defines two publications — one that consists of just a binary and another that contains the binary and associated sources — and two repositories — one for internal use and one for external consumers:

#### Example 246. Adding multiple publications and repositories

##### **build.gradle**

```
publishing {
    publications {
        binary(MavenPublication) {
            from components.java
        }
        binaryAndSources(MavenPublication) {
            from components.java
            artifact sourcesJar
        }
    }
    repositories {
        // change URLs to point to your repos, e.g. http://my.org/repo
        maven {
            name = 'external'
            url = "$buildDir/repos/external"
        }
        maven {
            name = 'internal'
            url = "$buildDir/repos/internal"
        }
    }
}
```

The publishing plugins will create tasks that allow you to publish either of the publications to either repository. They also attach those tasks to the `publish` aggregate task. But let's say you want to restrict the binary-only publication to the external repository and the binary-with-sources publication to the internal one. To do that, you need to make the publishing *conditional*.

Gradle allows you to skip any task you want based on a condition via the `Task.onlyIf(org.gradle.api.specs.Spec)` method. The following sample demonstrates how to implement the constraints we just mentioned:

### Example 247. Configuring which artifacts should be published to which repositories

#### build.gradle

```
tasks.withType(PublishToMavenRepository) {
    onlyIf {
        (repository == publishing.repositories.external &&
            publication == publishing.publications.binary) ||
        (repository == publishing.repositories.internal &&
            publication == publishing.publications.binaryAndSources)
    }
}
tasks.withType(PublishToMavenLocal) {
    onlyIf {
        publication == publishing.publications.binaryAndSources
    }
}
```

#### Output of `gradle publish publishToMavenLocal`

```
> gradle publish publishToMavenLocal
> Task :generatePomFileForBinaryAndSourcesPublication
> Task :compileJava
> Task :processResources
> Task :classes
> Task :jar
> Task :sourcesJar
> Task :publishBinaryAndSourcesPublicationToExternalRepository SKIPPED
> Task :publishBinaryAndSourcesPublicationToInternalRepository
> Task :generatePomFileForBinaryPublication
> Task :publishBinaryPublicationToExternalRepository
> Task :publishBinaryPublicationToInternalRepository SKIPPED
> Task :publish
> Task :publishBinaryAndSourcesPublicationToMavenLocal
> Task :publishBinaryPublicationToMavenLocal SKIPPED
> Task :publishToMavenLocal
```

BUILD SUCCESSFUL in 0s

9 actionable tasks: 9 executed

You may also want to define your own aggregate tasks to help with your workflow. For example, imagine that you have several publications that should be published to the external repository. It could be very useful to publish all of them in one go without publishing the internal ones.

The following sample demonstrates how you can do this by defining an aggregate task — `publishToExter` — that depends on all the relevant publish tasks:

### Example 248. Defining your own shorthand tasks for publishing

#### build.gradle

```
task publishToExternalRepository {
    group = 'publishing'
    description = 'Publishes all Maven publications to the external Maven repository'
    dependsOn tasks.withType(PublishToMavenRepository).matching {
        it.repository == publishing.repositories.external
    }
}
```

This particular sample automatically handles the introduction or removal of the relevant publishing tasks by using `TaskCollection.withType(java.lang.Class)` with the `PublishToMavenRepository` task type. You can do the same with `PublishToIvyRepository` if you're publishing to Ivy-compatible repositories.

§

## Configuring publishing tasks

The publishing plugins create their non-aggregate tasks after the project has been evaluated, which means you cannot directly reference them from your build script. If you would like to configure any of these tasks, you should use deferred task configuration. This can be done in a number of ways via the project's `tasks` collection.

For example, imagine you want to change where the `generatePomFileForPubNamePublication` tasks write their POM files. You can do this by using the `TaskCollection.withType(java.lang.Class)` method, as demonstrated by this sample:

### Example 249. Configuring a dynamically named task created by the publishing plugins

#### build.gradle

```
tasks.withType(GenerateMavenPom).all {
    def matcher = name =~ /generatePomFileFor(\w+)Publication/
    def publicationName = matcher[0][1]
    destination = "$buildDir/poms/${publicationName}-pom.xml"
}
```

The above sample uses a regular expression to extract the name of the publication from the name of the task. This is so that there is no conflict between the file paths of all the POM files that might be generated. If you only have one publication, then you don't have to worry about such conflicts since there will only be one POM file.

## Terminology

### Artifact

A file or directory produced by a build, such as a JAR, a ZIP distribution, or a native executable.

Artifacts are typically designed to be used or consumed by users or other projects, or deployed to hosting systems. In such cases, the artifact is a single file. Directories are common in the case of inter-project dependencies to avoid the cost of producing the publishable artifact.

### Component

Any single version of a module.

Components are defined by plugins and provide a simple way to define a publication for publishing. They comprise one or more artifacts as well as the appropriate metadata. For example, the `java` component consists of the production JAR — produced by the `jar` task — and its dependency information.

### Configuration

A named collection of dependencies or artifacts.

Gradle's configurations can be somewhat confusing because they apply to both dependencies and artifacts. The main difference is that dependencies are consumed by the project, while artifacts are produced by it. Even then, the artifacts produced by a project are often consumed as dependencies by other projects.

Configurations allow different aspects of the build to work with known subsets of a project's dependencies or artifacts, e.g. the dependencies required for compilation, or the artifacts related to a project's API.

### Publication

A description of the files and metadata that should be published to a repository as a single entity for use by consumers.

A publication has a name and consists of one or more artifacts plus information about those artifacts. The nature of that information depends on what type of repository you publish the publication to. In the case of Maven, the information takes the form of a POM.

One thing to bear in mind is that Maven repositories only allow a single *primary* artifact, i.e. one with metadata, but they do allow *secondary* artifacts such as packages of the associated source files and documentation ("-sources" and "-javadoc" JARs in the Java world).



# Ivy Publish Plugin

The Ivy Publish Plugin provides the ability to publish build artifacts in the Apache Ivy format, usually to a repository for consumption by other builds or projects. What is published is one or more artifacts created by the build, and an Ivy *module descriptor* (normally `ivy.xml`) that describes the artifacts and the dependencies of the artifacts, if any.

A published Ivy module can be consumed by Gradle (see *Declaring Dependencies*) and other tools that understand the Ivy format. You can learn about the fundamentals of publishing in *Publishing*.

§

## Usage

To use the Ivy Publish Plugin, include the following in your build script:

### Example 250. Applying the Ivy Publish Plugin

```
build.gradle
plugins {
    id 'ivy-publish'
```

The Ivy Publish Plugin uses an extension on the project named `publishing` of type `PublishingExtension`. This extension provides a container of named publications and a container of named repositories. The Ivy Publish Plugin works with `IvyPublication` publications and `IvyArtifactRepository` repositories.

§

## Tasks

**generateDescriptorFileForPubNamePublication** — type: `GenerateIvyDescriptor`

Creates an Ivy descriptor file for the publication named *PubName*, populating the known metadata such as project name, project version, and the dependencies. The default location for the descriptor file is *build/publications/\$pubName/ivy.xml*.

**publishPubNamePublicationToRepoNameRepository** — type: `PublishToIvyRepository`

Publishes the *PubName* publication to the repository named *RepoName*. If you have a repository definition without an explicit name, *RepoName* will be "Ivy".

**publish**

*Depends on:* All `publishPubNamePublicationToRepoNameRepository` tasks

An aggregate task that publishes all defined publications to all defined repositories.

§

## Publications

This plugin provides publications of type `IvyPublication`. To learn how to define and use publications, see the section on basic publishing.

There are four main things you can configure in an Ivy publication:

A component — via `IvyPublication.from(org.gradle.api.component.SoftwareComponent)`.

Custom artifacts — via the `IvyPublication.artifact(java.lang.Object)` method. See `IvyArtifact` for the available configuration options for custom Ivy artifacts.

Standard metadata like module, organisation and revision.

Other contents of the module descriptor — via `IvyPublication.descriptor(org.gradle.api.Action)`.

You can see all of these in action in the complete publishing example. The API documentation for `IvyPublication` has additional code samples.

§

### Identity values for the published project

The generated Ivy module descriptor file contains an `<info>` element that identifies the module. The default identity values are derived from the following:

organisation - `Project.getGroup()`

module - `Project.getName()`

revision - `Project.getVersion()`

status - `Project.getStatus()`

branch - (not set)

Overriding the default identity values is easy: simply specify the `organisation`, `module` or `revision` properties when configuring the `IvyPublication`. `status` and `branch` can be set via the `descriptor` property — see `IvyModuleDescriptorSpec`.

The `descriptor` property can also be used to add additional custom elements as children of the `<info>` element, like so:

#### Example 251. customizing the publication identity

##### build.gradle

```
publishing {
    publications {
        ivy(IvyPublication) {
            organisation = 'org.gradle.sample'
            module = 'project1-sample'
            revision = '1.1'
            descriptor.status = 'milestone'
            descriptor.branch = 'testing'
            descriptor.extraInfo 'http://my.namespace', 'myElement', 'Some value'

            from components.java
        }
    }
}
```

**Tip:** Certain repositories are not able to handle all supported characters. For example, the `:` character cannot be used as an identifier when publishing to a filesystem-backed repository on Windows.

Gradle will handle any valid Unicode character for `organisation`, `module` and `revision` (as well as the artifact's `name`, `extension` and `classifier`). The only values that are explicitly prohibited are `\`, `/` and any ISO control character. The supplied values are validated early during publication.

§

#### Customizing the generated module descriptor

At times, the module descriptor file generated from the project information will need to be tweaked before publishing. The `Ivy Publish Plugin` provides a DSL for that purpose. Please see `IvyModuleDescriptorSpec` in the DSL Reference for the complete documentation of available properties and methods.

The following sample shows how to use the most common aspects of the DSL:

#### Example 252. Customizing the module descriptor file

##### **build.gradle**

```
publications {
    ivyCustom(IvyPublication) {
        descriptor {
            license {
                name = 'The Apache License, Version 2.0'
                url = 'http://www.apache.org/licenses/LICENSE-2.0.txt'
            }
            author {
                name = 'Jane Doe'
                url = 'http://example.com/users/jane'
            }
            description {
                text = 'A concise description of my library'
                homepage = 'http://www.example.com/library'
            }
        }
    }
}
```

In this example we are simply adding a 'description' element to the generated Ivy dependency descriptor, but this hook allows you to modify any aspect of the generated descriptor. For example, you could replace the version range for a dependency with the actual version used to produce the build.

You can also add arbitrary XML to the descriptor file via `IvyModuleDescriptorSpec.withXml(org.gradle.api.Action)`, but you can not use it to modify any part of the module identifier (organisation, module, revision).

*It is possible to modify the descriptor in such a way that it is no longer a valid Ivy module descriptor, so care must be taken when using this feature.*

## §

## Repositories

This plugin provides repositories of type `IvyArtifactRepository`. To learn how to define and use repositories for publishing, see the section on basic publishing.

Here's a simple example of defining a publishing repository:

### Example 253. Declaring repositories to publish to

#### build.gradle

```
publishing {
    repositories {
        ivy {
            // change to point to your repo, e.g. http://my.org/repo
            url = "$buildDir/repo"
        }
    }
}
```

The two main things you will want to configure are the repository's:

URL (required)

Name (optional)

You can define multiple repositories as long as they have unique names within the build script. You may also declare one (and only one) repository without a name. That repository will take on an implicit name of "Ivy".

You can also configure any authentication details that are required to connect to the repository. See [IvyArtifactRepository](#) for more details.

§

## Complete example

The following example demonstrates publishing with a multi-project build. Each project publishes a Java component and a configured additional source artifact. The descriptor file is customized to include the project description for each project.

### Example 254. Publishing a Java module

#### build.gradle

```
subprojects {
    apply plugin: 'java'
    apply plugin: 'ivy-publish'

    version = '1.0'
    group = 'org.gradle.sample'

    repositories {
        mavenCentral()
    }
    task sourcesJar(type: Jar) {
        from sourceSets.main.java
        classifier = 'sources'
    }
}
```

```

}

project(':project1') {
    description = 'The first project'

    dependencies {
        compile 'junit:junit:4.12', project(':project2')
    }
}

project(':project2') {
    description = 'The second project'

    dependencies {
        compile 'commons-collections:commons-collections:3.2.2'
    }
}

subprojects {
    publishing {
        repositories {
            ivy {
                // change to point to your repo, e.g. http://my.org/repo
                url = "${rootProject.buildDir}/repo"
            }
        }
        publications {
            ivy(IvyPublication) {
                from components.java
                artifact(sourcesJar) {
                    type = 'sources'
                    conf = 'compile'
                }
                descriptor.description {
                    text = description
                }
            }
        }
    }
}

```

```
}  
}
```

The result is that the following artifacts will be published for each project:

The Ivy module descriptor file: `ivy-1.0.xml`.

The primary JAR artifact for the Java component: `project1-1.0.jar`.

The source JAR artifact that has been explicitly configured: `project1-1.0-source.jar`.

When `project1` is published, the module descriptor (i.e. the `ivy.xml` file) that is produced will look like:

#### Example 255. Example generated ivy.xml

##### output-ivy.xml

```
<?xml version="1.0" encoding="UTF-8"?>  
<ivy-module version="2.0" xmlns:m="http://ant.apache.org/ivy/maven">  
  <info organisation="org.gradle.sample" module="project1" revision="1.0" status="stable">  
    <description>The first project</description>  
  </info>  
  <configurations>  
    <conf name="compile" visibility="public"/>  
    <conf name="default" visibility="public" extends="compile, runtime"/>  
    <conf name="runtime" visibility="public"/>  
  </configurations>  
  <publications>  
    <artifact name="project1" type="sources" ext="jar" conf="compile" m:classifier="sources"/>  
    <artifact name="project1" type="jar" ext="jar" conf="compile"/>  
  </publications>  
  <dependencies>  
    <dependency org="junit" name="junit" rev="4.12" conf="compile->default"/>  
    <dependency org="org.gradle.sample" name="project2" rev="1.0" conf="compile->default"/>  
  </dependencies>  
</ivy-module>
```

**Tip:** Note that «PUBLICATION-TIME-STAMP» in this example Ivy module descriptor will be the timestamp of when the descriptor was generated.

# Maven Publish Plugin

The Maven Publish Plugin provides the ability to publish build artifacts to an Apache Maven repository. A module published to a Maven repository can be consumed by Maven, Gradle (see *Declaring Dependencies*) and other tools that understand the Maven repository format. You can learn about the fundamentals of publishing in *Publishing*.

§

## Usage

To use the Maven Publish Plugin, include the following in your build script:

### Example 256. Applying the Maven Publish Plugin

```
build.gradle
plugins {
    id 'maven-publish'
}
```

The Maven Publish Plugin uses an extension on the project named `publishing` of type `PublishingExtension`. This extension provides a container of named publications and a container of named repositories. The Maven Publish Plugin works with `MavenPublication` publications and `MavenArtifactRepository` repositories.



§

## Tasks

**generatePomFileForPubNamePublication** — type: `GenerateMavenPom`

Creates a POM file for the publication named *PubName*, populating the known metadata such as project name, project version, and the dependencies. The default location for the POM file is *build/publications/\$pubName/pom-default.xml*.

**publishPubNamePublicationToRepoNameRepository** — type: `PublishToMavenRepository`

Publishes the *PubName* publication to the repository named *RepoName*. If you have a repository definition without an explicit name, *RepoName* will be "Maven".

**publishPubNamePublicationToMavenLocal** — type: `PublishToMavenLocal`

Copies the *PubName* publication to the local Maven cache — typically *\$USER\_HOME/.m2/repository* — along with the publication's POM file and other metadata.

**publish**

*Depends on:* All `publishPubNamePublicationToRepoNameRepository` tasks

An aggregate task that publishes all defined publications to all defined repositories. It does *not* include copying publications to the local Maven cache.

**publishToMavenLocal**

*Depends on:* All `publishPubNamePublicationToMavenLocal` tasks

Copies all defined publications to the local Maven cache, including their metadata (POM files, etc.).

§

## Publications

This plugin provides publications of type `MavenPublication`. To learn how to define and use publications, see the section on basic publishing.

There are four main things you can configure in a Maven publication:

A component — via `MavenPublication.from(org.gradle.api.component.SoftwareComponent)`.

Custom artifacts — via the `MavenPublication.artifact(java.lang.Object)` method. See `MavenArtifact` for the available configuration options for custom Maven artifacts.

Standard metadata like `artifactId`, `groupId` and `version`.

Other contents of the POM file — via `MavenPublication.pom(org.gradle.api.Action)`.

You can see all of these in action in the complete publishing example. The API documentation for `MavenPub` has additional code samples.

§

## Identity values in the generated POM

The attributes of the generated POM file will contain identity values derived from the following project properties:

```
groupId - Project.getGroup()
```

```
artifactId - Project.getName()
```

```
version - Project.getVersion()
```

Overriding the default identity values is easy: simply specify the `groupId`, `artifactId` or `version` attributes when configuring the `MavenPublication`.

### Example 257. customizing the publication identity

#### **build.gradle**

```
publishing {
    publications {
        maven(MavenPublication) {
            groupId = 'org.gradle.sample'
            artifactId = 'project1-sample'
            version = '1.1'

            from components.java
        }
    }
}
```

**Tip:** Certain repositories will not be able to handle all supported characters. For example, the `:` character cannot be used as an identifier when publishing to a filesystem-backed repository on Windows.

Maven restricts `groupId` and `artifactId` to a limited character set (`[A-Za-z0-9_\-\.\+]`) and Gradle enforces this restriction. For `version` (as well as the artifact `extension` and `classifier` properties), Gradle will handle any valid Unicode character.

The only Unicode values that are explicitly prohibited are `\`, `/` and any ISO control character. Supplied values are validated early in publication.

§

## Customizing the generated POM

The generated POM file can be customized before publishing. For example, when publishing a library to Maven Central you will need to set certain metadata. The Maven Publish Plugin provides a DSL for that purpose. Please see [MavenPom](#) in the DSL Reference for the complete documentation of available properties and methods. The following sample shows how to use the most common ones:

### Example 258. Customizing the POM file

#### build.gradle

```
publishing {
    publications {
        mavenJava(MavenPublication) {
            pom {
                name = 'My Library'
                description = 'A concise description of my library'
                url = 'http://www.example.com/library'
                licenses {
                    license {
                        name = 'The Apache License, Version 2.0'
                        url = 'http://www.apache.org/licenses/LICENSE-2.0.txt'
                    }
                }
            }
            developers {
                developer {
                    id = 'johnd'
                    name = 'John Doe'
                    email = 'john.doe@example.com'
                }
            }
            scm {
                connection = 'scm:git:git://example.com/my-library.git'
                developerConnection = 'scm:git:ssh://example.com/my-library.git'
                url = 'http://example.com/my-library/'
            }
        }
    }
}
```

§

## Repositories

This plugin provides repositories of type [MavenArtifactRepository](#). To learn how to define and use repositories for publishing, see the section on basic publishing.

Here's a simple example of defining a publishing repository:

#### Example 259. Declaring repositories to publish to

**build.gradle**

```
publishing {
    repositories {
        maven {
            // change to point to your repo, e.g. http://my.org/repo
            url = "$buildDir/repo"
        }
    }
}
```

The two main things you will want to configure are the repository's:

URL (required)

Name (optional)

You can define multiple repositories as long as they have unique names within the build script. You may also declare one (and only one) repository without a name. That repository will take on an implicit name of "Maven".

You can also configure any authentication details that are required to connect to the repository. See [MavenArtifactRepository](#) for more details.

§

#### Snapshot and release repositories

It is a common practice to publish snapshots and releases to different Maven repositories. A simple way to accomplish this is to configure the repository URL based on the project version. The following sample uses one URL for versions that end with "SNAPSHOT" and a different URL for the rest:

#### Example 260. Configuring repository URL based on project version

**build.gradle**

```
publishing {
    repositories {
        maven {
            def releasesRepoUrl = "$buildDir/repos/releases"
            def snapshotsRepoUrl = "$buildDir/repos/snapshots"
            url = version.endsWith('SNAPSHOT') ? snapshotsRepoUrl : releasesRepoUrl
        }
    }
}
```

Similarly, you can use a project or system property to decide which repository to publish to. The following example uses the release repository if the project property `release` is set, such as when a user runs `gradl`

:

#### Example 261. Configuring repository URL based on project property

**build.gradle**

```
publishing {
    repositories {
        maven {
            def releasesRepoUrl = "$buildDir/repos/releases"
            def snapshotsRepoUrl = "$buildDir/repos/snapshots"
            url = project.hasProperty('release') ? releasesRepoUrl : snapshotsRepoUrl
        }
    }
}
```

§

## Publishing to Maven Local

For integration with a local Maven installation, it is sometimes useful to publish the module into the Maven local repository (typically at `$USER_HOME/.m2/repository`), along with its POM file and other metadata. In Maven parlance, this is referred to as 'installing' the module.

The Maven Publish Plugin makes this easy to do by automatically creating a [PublishToMavenLocal](#) task for each [MavenPublication](#) in the `publishing.publications` container. The task name follows the pattern of `publishPubNamePublicationToMavenLocal`. Each of these tasks is wired into the `publish` aggregate task. You do not need to have `mavenLocal()` in your `publishing.repositories` section.

§

## Complete example

The following example demonstrates how to sign and publish a Java library including sources, Javadoc, and a customized POM:

#### Example 262. Publishing a Java library

**build.gradle**

```
plugins {
    id 'java-library'
    id 'maven-publish'
    id 'signing'
}

group = 'com.example'
version = '1.0'

task sourcesJar(type: Jar) {
    from sourceSets.main.allJava
```

```

        classifier = 'sources'
    }

    task javadocJar(type: Jar) {
        from javadoc
        classifier = 'javadoc'
    }

    publishing {
        publications {
            mavenJava(MavenPublication) {
                artifactId = 'my-library'
                from components.java
                artifact sourcesJar
                artifact javadocJar
                pom {
                    name = 'My Library'
                    description = 'A concise description of my library'
                    url = 'http://www.example.com/library'
                    licenses {
                        license {
                            name = 'The Apache License, Version 2.0'
                            url = 'http://www.apache.org/licenses/LICENSE-2.0.txt'
                        }
                    }
                    developers {
                        developer {
                            id = 'johnd'
                            name = 'John Doe'
                            email = 'john.doe@example.com'
                        }
                    }
                    scm {
                        connection = 'scm:git:git://example.com/my-library.git'
                        developerConnection = 'scm:git:ssh://example.com/my-library.git'
                        url = 'http://example.com/my-library/'
                    }
                }
            }
        }
    }

    repositories {
        maven {
            // change URLs to point to your repos, e.g. http://my.org/repos
            def releasesRepoUrl = "$buildDir/repos/releases"
            def snapshotsRepoUrl = "$buildDir/repos/snapshots"
            url = version.endsWith('SNAPSHOT') ? snapshotsRepoUrl : releasesRepoUrl
        }
    }
}

```

```
signing {  
    sign publishing.publications.mavenJava  
}  
  
javadoc {  
    if(JavaVersion.current().isJava9Compatible()) {  
        options.addBooleanOption('html4', true)  
    }  
}
```

```
}  
}
```

The result is that the following artifacts will be published:

The POM: `my-library-1.0.pom`

The primary JAR artifact for the Java component: `my-library-1.0.jar`

The sources JAR artifact that has been explicitly configured: `my-library-1.0-sources.jar`

The Javadoc JAR artifact that has been explicitly configured: `my-library-1.0-javadoc.jar`

The Signing Plugin is used to generate a signature file for each artifact. In addition, checksum files will be generated for all artifacts and signature files.

§

## Removal of deferred configuration behavior

**Note:** Gradle 5.0 will change the behavior of the publishing `{}` block. Read on to find out how you can make your build compatible today.

Prior to Gradle 4.8, the `publishing {}` block was implicitly treated as if all the logic inside it was executed after the project is evaluated. This caused quite a bit of confusion, because it was the only block that behaved that way. As part of the stabilization effort in Gradle 4.8, we are deprecating this behavior and asking all users to migrate their build.

The new, stable behavior can be switched on by adding the following to your settings file:

```
enableFeaturePreview('STABLE_PUBLISHING')
```

We recommend doing a test run with a local repository to see whether all artifacts still have the expected coordinates. In most cases everything should work as before and you are done.

If the coordinates change unexpectedly, you may have some logic inside your publishing block or in a plugin that is depending on the deferred configuration behavior. For instance, the following logic assumes that the subprojects will be evaluated when the `artifactId` is set:



```
subprojects {
    publishing {
        publications {
            mavenJava {
                from components.java
                artifactId = jar.baseName
            }
        }
    }
}
```

This kind of logic must be wrapped in an `afterEvaluate {}` block to make it work going forward.

```
subprojects {
    publishing {
        publications {
            mavenJava {
                from components.java
                afterEvaluate {
                    artifactId = jar.baseName
                }
            }
        }
    }
}
```

# The Signing Plugin

The Signing Plugin adds the ability to digitally sign built files and artifacts. These digital signatures can then be used to prove who built the artifact the signature is attached to as well as other information such as when the signature was generated.

The Signing Plugin currently only provides support for generating OpenPGP signatures (which is the signature format required for publication to the Maven Central Repository).

§

## Usage

To use the Signing Plugin, include the following in your build script:

### Example 263. Using the Signing Plugin

```
build.gradle
plugins {
    id 'signing'
}
```

§

## Signatory credentials

In order to create OpenPGP signatures, you will need a key pair (instructions on creating a key pair using the GnuPG tools can be found in the GnuPG HOWTOs). You need to provide the Signing Plugin with your key information, which means three things:

The public key ID (The last 8 symbols of the keyId. You can use `gpg -K` to get it).

The absolute path to the secret key ring file containing your private key. (Since gpg 2.1, you need to export the keys with command `gpg --keyring secring.gpg --export-secret-keys > ~/.gnupg/secr:`).

The passphrase used to protect your private key.

These items must be supplied as the values of the `signing.keyId`, `signing.secretKeyRingFile`, and `signing.password` properties, respectively.

|

**Note:** Given the personal and private nature of these values, a good practice is to store them in the `gradle.properties` file in the user's Gradle home directory (described in the section called "System properties") instead of in the project directory itself.

```
signing.keyId=24875D73
signing.password=secret
signing.secretKeyRingFile=/Users/me/.gnupg/secring.gpg
```

If specifying this information (especially `signing.password`) in the user `gradle.properties` file is not feasible for your environment, you can source the information however you need to and set the project properties manually.

```
import org.gradle.plugins.signing.Sign

gradle.taskGraph.whenReady { taskGraph ->
    if (taskGraph.allTasks.any { it instanceof Sign }) {
        // Use Java 6's console to read from the console (no good for
        // a CI environment)
        Console console = System.console()
        console.printf "\n\nWe have to sign some things in this build." +
            "\n\nPlease enter your signing details.\n\n"

        def id = console.readLine("PGP Key Id: ")
        def file = console.readLine("PGP Secret Key Ring File (absolute path): ")
        def password = console.readPassword("PGP Private Key Password: ")

        allprojects { ext."signing.keyId" = id }
        allprojects { ext."signing.secretKeyRingFile" = file }
        allprojects { ext."signing.password" = password }

        console.printf "\nThanks.\n\n"
    }
}
```

Note that the presence of a null value for any these three properties will cause an exception.

§

## Using OpenPGP subkeys

OpenPGP supports subkeys, which are like the normal keys, except they're bound to a master key pair. One feature of OpenPGP subkeys is that they can be revoked independently of the master keys which makes key management easier. A practical case study of how subkeys can be leveraged in software development can be read on the Debian wiki.

The Signing Plugin supports OpenPGP subkeys out of the box. Just specify a subkey ID as the value in the `signing.keyId` property.

§

## Using gpg-agent

By default the Signing Plugin uses a Java-based implementation of PGP for signing. This implementation cannot use the gpg-agent program for managing private keys, though. If you want to use the gpg-agent, you can change the signatory implementation used by the Signing Plugin:

### Example 264. Sign with GnuPG

#### **build.gradle**

```
signing {  
    useGpgCmd()  
    sign configurations.archives  
}
```

This tells the Signing Plugin to use the `GnupgSignatory` instead of the default `PgpSignatory`. The `Gnupg` relies on the `gpg2` program to sign the artifacts. Of course, this requires that GnuPG is installed.

Without any further configuration the `gpg2` (on Windows: `gpg2.exe`) executable found on the `PATH` will be used. The password is supplied by the `gpg-agent` and the default key is used for signing.

§

## Gnupg signatory configuration

The `GnupgSignatory` supports a number of configuration options for controlling how gpg is invoked. These are typically set in `gradle.properties`:

### Example 265. Configure the GnupgSignatory

#### **gradle.properties**

```
signing.gnupg.executable=gpg  
signing.gnupg.useLegacyGpg=true  
signing.gnupg.homeDir=gnupg-home  
signing.gnupg.optionsFile=gnupg-home/gpg.conf  
signing.gnupg.keyName=24875D73  
signing.gnupg.passphrase=gradle
```

#### **signing.gnupg.executable**

The gpg executable that is invoked for signing. The default value of this property depends on `useLegacyGpg`. If that is `true` then the default value of `executable` is "gpg" otherwise it is "gpg2".

#### **signing.gnupg.useLegacyGpg**

Must be `true` if GnuPG version 1 is used and `false` otherwise. The default value of the property is `false`.

#### **signing.gnupg.homeDir**

Sets the home directory for GnuPG. If not given the default home directory of GnuPG is used.

### **signing.gnupg.optionsFile**

Sets a custom options file for GnuPG. If not given GnuPG's default configuration file is used.

### **signing.gnupg.keyName**

The id of the key that should be used for signing. If not given then the default key configured in GnuPG will be used.

### **signing.gnupg.passphrase**

The passphrase for unlocking the secret key. If not given then the gpg-agent program is used for getting the passphrase.

All configuration properties are optional.

§

## Specifying what to sign

As well as configuring how things are to be signed (i.e. the signatory configuration), you must also specify what is to be signed. The Signing Plugin provides a DSL that allows you to specify the tasks and/or configurations that should be signed.

§

### Signing Publications

When publishing artifacts, you often want to sign them so the consumer of your artifacts can verify their signature. For example, the Java plugin defines a component that you can use to define a publication to a Maven (or Ivy) repository using the Maven Publish Plugin (or the Ivy Publish Plugin, respectively). Using the Signing DSL, you can specify that all of the artifacts of this publication should be signed.

#### **Example 266. Signing a publication**

##### **build.gradle**

```
signing {  
    sign publishing.publications.mavenJava  
}
```

This will create a task (of type [Sign](#)) in your project named `signMavenJavaPublication` that will build all artifacts that are part of the publication (if needed) and then generate signatures for them. The signature files will be placed alongside the artifacts being signed.

### Example 267. Signing a publication output

#### Output of `gradle signMavenJavaPublication`

```
> gradle signMavenJavaPublication
> Task :generatePomFileForMavenJavaPublication
> Task :compileJava
> Task :processResources
> Task :classes
> Task :jar
> Task :javadoc
> Task :javadocJar
> Task :sourcesJar
> Task :signMavenJavaPublication

BUILD SUCCESSFUL in 0s
8 actionable tasks: 8 executed
```

In addition, the above DSL allows to `sign` multiple comma-separated publications. Alternatively, you may specify `publishing.publications` to sign all publications, or use `publishing.publications.match` to sign all publications that match the specified predicate.

§

### Signing Configurations

It is common to want to sign the artifacts of a configuration. For example, the Java plugin configures a jar to build and this jar artifact is added to the `archives` configuration. Using the Signing DSL, you can specify that all of the artifacts of this configuration should be signed.

### Example 268. Signing a configuration

#### **build.gradle**

```
signing {
    sign configurations.archives
}
```

This will create a task (of type `Sign`) in your project named `signArchives`, that will build any `archives` artifacts (if needed) and then generate signatures for them. The signature files will be placed alongside the artifacts being signed.

### Example 269. Signing a configuration output

#### Output of `gradle signArchives`

```
> gradle signArchives
> Task :compileJava
> Task :processResources
> Task :classes
> Task :jar
> Task :signArchives

BUILD SUCCESSFUL in 0s
4 actionable tasks: 4 executed
```

§

## Signing Tasks

In some cases the artifact that you need to sign may not be part of a configuration. In this case you can directly sign the task that produces the artifact to sign.

### Example 270. Signing a task

#### `build.gradle`

```
task stuffZip (type: Zip) {
    baseName = "stuff"
    from "src/stuff"
}

signing {
    sign stuffZip
}
```

This will create a task (of type [Sign](#)) in your project named `signStuffZip`, that will build the input task's archive (if needed) and then sign it. The signature file will be placed alongside the artifact being signed.

### Example 271. Signing a task output

#### Output of `gradle signStuffZip`

```
> gradle signStuffZip
> Task :stuffZip
> Task :signStuffZip

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed
```

For a task to be *signable*, it must produce an archive of some type, i.e. it must extend [AbstractArchiveTask](#). Tasks that do this are the [Tar](#), [Zip](#), [Jar](#), [War](#) and [Ear](#) tasks.

§

## Conditional Signing

A common usage pattern is to require the signing of build artifacts only under certain conditions. For example, you may not need to sign artifacts for non-release versions. To achieve this, you can specify the condition as an argument of the `required()` method.

### Example 272. Specifying when signing is required

#### **build.gradle**

```
version = '1.0-SNAPSHOT'
ext.isReleaseVersion = !version.endsWith("SNAPSHOT")

signing {
    required { isReleaseVersion && gradle.taskGraph.hasTask("uploadArchives") }
    sign configurations.archives
}
```

In this example, we only want to require signing if we are building a release version and we are going to publish it. Because we are inspecting the task graph to determine if we are going to be publishing, we must set the `signing.required` property to a closure to defer the evaluation. See [SigningExtension.setRequired\(java.lang.Object\)](#) for more information.

If the `required` condition does not hold true, artifacts will only be signed if signatory credentials are configured. Alternatively, you may want to skip signing entirely whether or not signatory credentials are available. If so, you can configure the `Sign` tasks to be skipped, for example by attaching a predicate using the `onlyIf()` method shown in the following example:

### Example 273. Specifying when signing is skipped

#### **build.gradle**

```
tasks.withType(Sign) {
    onlyIf { isReleaseVersion }
}
```

§

## Publishing the signatures

When signing publications, the resultant signature artifacts are automatically added to the corresponding publication. Thus, when publishing to a repository, e.g. by executing the `publish` task, your signatures will be distributed along with the other artifacts without any additional configuration.

When signing configurations and tasks, the resultant signature artifacts are automatically added to the `sign` and `archives` dependency configurations. This means that if you want to upload your signatures to your distribution repository along with the artifacts you simply execute the `uploadArchives` task.



## §

### Signing POM files

**Note:** This section covers signing POM files for the *original* publishing mechanism available in Gradle 1.0. The POM file generated by the *new* Maven publishing support provided by the Maven Publishing plugin is automatically signed if the corresponding publication is specified to be signed.

When deploying signatures for your artifacts to a Maven repository, you will also want to sign the published POM file. The Signing Plugin adds a `signing.signPom()` (see: [SigningExtension.signPom\(org.gradle.api.artifacts.maven.MavenDeployment, groovy.lang.Closure\)](#)) method that can be used in the `beforeDeployment()` block in your upload task configuration.

#### Example 274. Signing a POM for deployment

##### **build.gradle**

```
uploadArchives {
    repositories {
        mavenDeployer {
            beforeDeployment { MavenDeployment deployment -> signing.signPom(deployment) }
        }
    }
}
```

When signing is not required and the POM cannot be signed due to insufficient configuration (i.e. no credentials for signing) then the `signPom()` method will silently do nothing.

# The Distribution Plugin

**Note:** The Distribution Plugin is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The Distribution Plugin facilitates building archives that serve as distributions of the project. Distribution archives typically contain the executable application and other supporting files, such as documentation.

§

## Usage

To use the Distribution Plugin, include the following in your build script:

### Example 275. Using the Distribution Plugin

```
build.gradle
apply plugin: 'distribution'
```

The plugin adds an extension named `distributions` of type `DistributionContainer` to the project. It also creates a single distribution in the `distributions` container extension named `main`. If your build only produces one distribution you only need to configure this distribution (or use the defaults).

You can run `gradle distZip` to package the main distribution as a ZIP, or `gradle distTar` to create a TAR file. To build both types of archives just run `gradle assembleDist`. The files will be created at `$buildDir`.

You can run `gradle installDist` to assemble the uncompressed distribution into `$buildDir/install`.

§

## Tasks

The Distribution Plugin adds a number of tasks to your project, as shown below.

**distZip** — type: `Zip`

Creates a ZIP archive of the distribution contents.

**distTar** — type: `Task`

Creates a TAR archive of the distribution contents.

**assembleDist** — type: [Task](#)

*Depends on:* `distTar`, `distZip`

Creates ZIP and TAR archives of the distribution contents.

**installDist** — type: [Sync](#)

Assembles the distribution content and installs it on the current machine.

For each additional distribution you add to the project, the Distribution Plugin adds the following tasks, where `distributionName` comes from `Distribution.getName()`:

**distributionNameDistZip** — type: [Zip](#)

Creates a ZIP archive of the distribution contents.

**distributionNameDistTar** — type: [Tar](#)

Creates a TAR archive of the distribution contents.

**assembleDistributionNameDist** — type: [Task](#)

*Depends on:* `distributionNameDistTar`, `distributionNameDistZip`

Creates ZIP and TAR archives of the distribution contents.

**installDistributionNameDist** — type: [Sync](#)

Assembles the distribution content and installs it on the current machine.

The following sample creates a `custom` distribution that will cause four additional tasks to be added to the project: `customDistZip`, `customDistTar`, `assembleCustomDist`, and `installCustomDist`:

#### Example 276. Adding extra distributions

**build.gradle**

```
distributions {  
    custom {}  
}
```

Given that the project name is `myproject` and version `1.2`, running `gradle customDistZip` will produce a ZIP file named `myproject-custom-1.2.zip`.

Running `gradle installCustomDist` will install the distribution contents into `$buildDir/install/custom`.

§

## Distribution contents

All of the files in the `src/$distribution.name/dist` directory will automatically be included in the distribution. You can add additional files by configuring the [Distribution](#) object that is part of the container.

### Example 277. Configuring the main distribution

#### build.gradle

```
distributions {  
    main {  
        baseName = 'someName'  
        contents {  
            from { 'src/readme' }  
        }  
    }  
}
```

In the example above, the content of the `src/readme` directory will be included in the distribution (along with the files in the `src/main/dist` directory which are added by default).

The `baseName` property has also been changed. This will cause the distribution archives to be created with a different name.

§

## Publishing

A distribution can be published using the Ivy Publish Plugin or Maven Publish Plugin, or via the *original* publishing mechanism using the `uploadArchives` task.

§

### Using the Ivy/Maven Publish Plugins

To publish a distribution to an Ivy repository with the Ivy Publish Plugin, simply add one or both of its archive tasks to an [IvyPublication](#). The following sample demonstrates how to add the ZIP archive of the `main` distribution and the TAR archive of the `custom` distribution to the `myDistribution` publication:

### Example 278. Adding distribution archives to an Ivy publication

#### build.gradle

```
apply plugin: 'ivy-publish'  
  
publishing {  
    publications {  
        myDistribution(IvyPublication) {  
            artifact distZip  
            artifact customDistTar  
        }  
    }  
}
```

Similarly, to publish a distribution to a Maven repository using the Maven Publish Plugin, add one or both of its archive tasks to a [MavenPublication](#) as follows:

### Example 279. Adding distribution archives to a Maven publication

#### build.gradle

```
apply plugin: 'maven-publish'

publishing {
    publications {
        myDistribution(MavenPublication) {
            artifact distZip
            artifact customDistTar
        }
    }
}
```

§

#### Using the `uploadArchives` task

The Distribution Plugin adds the distribution archives as default publishing artifact candidates. With the Maven Plugin applied, the distribution ZIP file will be published when running `uploadArchives` if no other default artifact is configured.

### Example 280. Publishing the distribution ZIP with the Maven Plugin

#### build.gradle

```
apply plugin: 'maven'

uploadArchives {
    repositories {
        mavenDeployer {
            repository(url: "file://some/repo")
        }
    }
}
```

# The Announce Plugin

The Gradle announce plugin allows you to send custom announcements during a build. The following notification systems are supported:

Twitter

notify-send (Ubuntu)

Snarl (Windows)

Growl (macOS)

§

## Usage

To use the announce plugin, apply it to your build script:

### Example 281. Applying the announce plugin

```
build.gradle  
apply plugin: 'announce'
```

Next, configure your notification service(s) of choice (see table below for which configuration properties are available):

### Example 282. Configure the announce plugin

```
build.gradle  
announce {  
    username = 'myId'  
    password = 'myPassword'  
}
```

Finally, send announcements with the `announce` method:

**Example 283. Using the announce plugin**

**build.gradle**

```
task helloWorld {
    doLast {
        println "Hello, world!"
    }
}

helloWorld.doLast {
    announce.announce("helloWorld completed!", "twitter")
    announce.announce("helloWorld completed!", "local")
}
```

The `announce` method takes two `String` arguments: The message to be sent, and the notification service to be used. The following table lists supported notification services and their configuration properties.

**Table 20. Announce Plugin Notification Services**

Notification service	Operating System	Configuration Properties	Further Information
Twitter	Any	username, password	
snarl	Windows		
growl	macOS		
notify-send	Ubuntu		Requires the notify-send package to be installed. Use <code>sudo apt-get install notify-send</code> to install it.
cal	Windows, macOS, Ubuntu		Automatically chooses between snarl, growl, and notify-send depending on the current operating system.

§  
**Configuration**

See the [AnnouncePluginExtension](#) class in the API documentation.

# The Build Announcements Plugin

**Note:** The build announcements plugin is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The build announcements plugin uses the announce plugin to send local announcements on important events in the build.

§

## Usage

To use the build announcements plugin, include the following in your build script:

### Example 284. Using the build announcements plugin

**build.gradle**

```
apply plugin: 'build-announcements'
```

That's it. If you want to tweak where the announcements go, you can configure the announce plugin to change the local announcer.

You can also apply the plugin from an init script:

### Example 285. Using the build announcements plugin from an init script

**init.gradle**

```
rootProject {  
    apply plugin: 'build-announcements'  
}
```



# Legacy publishing

**Note:** This chapter describes the *original* publishing mechanism available in Gradle 1.0, which has since been superseded by an alternative model. The approach detailed in this chapter — based on `Upload` tasks — should not be used in new builds. We cover it in order to help users work with and update existing builds that use it.

§

## Introduction

This chapter is about how you declare the outgoing artifacts of your project, and how to work with them (e.g. upload them). We define the artifacts of the projects as the files the project provides to the outside world. This might be a library or a ZIP distribution or any other file. A project can publish as many artifacts as it wants.

§

## Artifacts and configurations

Like dependencies, artifacts are grouped by configurations. In fact, a configuration can contain both artifacts and dependencies at the same time.

For each configuration in your project, Gradle provides the tasks `uploadConfigurationName` and `buildConfigurationName`.<sup>[9]</sup> Execution of these tasks will build or upload the artifacts belonging to the respective configuration.

the section called “Dependency configurations” shows the configurations added by the Java plugin. Two of the configurations are relevant for the usage with artifacts. The `archives` configuration is the standard configuration to assign your artifacts to. The Java plugin automatically assigns the default jar to this configuration. We will talk more about the `runtime` configuration in the section called “More about project libraries”. As with dependencies, you can declare as many custom configurations as you like and assign artifacts to them.

§

## Declaring artifacts

§

### Archive task artifacts

You can use an archive task to define an artifact:

#### Example 286. Defining an artifact using an archive task

##### **build.gradle**

```
task myJar(type: Jar)

artifacts {
    archives myJar
}
```

It is important to note that the custom archives you are creating as part of your build are not automatically assigned to any configuration. You have to explicitly do this assignment.

§

### File artifacts

You can also use a file to define an artifact:

#### Example 287. Defining an artifact using a file

##### **build.gradle**

```
def someFile = file('build/somefile.txt')

artifacts {
    archives someFile
}
```

Gradle will figure out the properties of the artifact based on the name of the file. You can customize these properties:

### Example 288. Customizing an artifact

#### build.gradle

```
task myTask(type: MyTaskType) {
    destFile = file('build/somefile.txt')
}

artifacts {
    archives(myTask.destFile) {
        name 'my-artifact'
        type 'text'
        builtBy myTask
    }
}
```

There is a map-based syntax for defining an artifact using a file. The map must include a `file` entry that defines the file. The map may include other artifact properties:

### Example 289. Map syntax for defining an artifact using a file

#### build.gradle

```
task generate(type: MyTaskType) {
    destFile = file('build/somefile.txt')
}

artifacts {
    archives file: generate.destFile, name: 'my-artifact', type: 'text', builtBy
}
```

## §

## Publishing artifacts

We have said that there is a specific upload task for each configuration. Before you can do an upload, you have to configure the upload task and define where to publish the artifacts to. The repositories you have defined (as described in *Declaring Repositories*) are not automatically used for uploading. In fact, some of those repositories only allow downloading artifacts, not uploading. Here is an example of how you can configure the upload task of a configuration:

### Example 290. Configuration of the upload task

```
build.gradle
repositories {
    flatDir {
        name "fileRepo"
        dirs "repo"
    }
}

uploadArchives {
    repositories {
        add project.repositories.fileRepo
        ivy {
            credentials {
                username "username"
                password "pw"
            }
            url "http://repo.mycompany.com"
        }
    }
}
```

As you can see, you can either use a reference to an existing repository or create a new repository.

If an upload repository is defined with multiple patterns, Gradle must choose a pattern to use for uploading each file. By default, Gradle will upload to the pattern defined by the `url` parameter, combined with the optional `layout` parameter. If no `url` parameter is supplied, then Gradle will use the first defined `artifact` for uploading, or the first defined `ivyPattern` for uploading Ivy files, if this is set.

Uploading to a Maven repository is described in the section called “Interacting with Maven repositories”.

§

## More about project libraries

If your project is supposed to be used as a library, you need to define what are the artifacts of this library and what are the dependencies of these artifacts. The Java plugin adds a `runtime` configuration for this purpose, with the implicit assumption that the `runtime` dependencies are the dependencies of the artifact you want to publish. Of course this is fully customizable. You can add your own custom configuration or let the existing configurations extend from other configurations. You might have a different group of artifacts which have a different set of dependencies. This mechanism is very powerful and flexible.

If someone wants to use your project as a library, she simply needs to declare which configuration of the dependency to depend on. A Gradle dependency offers the `configuration` property to declare this. If this is not specified, the `default` configuration is used (see *Managing Dependency Configurations*). Using your project as a library can either happen from within a multi-project build or by retrieving your project from a repository. In the latter case, an `ivy.xml` descriptor in the repository is supposed to contain all the

necessary information. If you work with Maven repositories you don't have the flexibility as described above. For how to publish to a Maven repository, see the section the section called "Interacting with Maven repositories".

---

[9] To be exact, the Base plugin provides those tasks. This plugin is automatically applied if you use the Java plugin.

# Maven Plugin

**Note:** This chapter describes deploying artifacts to Maven repositories using the *original* publishing mechanism available in Gradle 1.0: in Gradle 1.3 a new mechanism for publishing was introduced. This new mechanism introduces some new concepts and features that make Gradle publishing even more powerful and is now the preferred option for publishing artifacts.

You can read about the new publishing plugins in *Ivy Publish Plugin* and *Maven Publish Plugin*.

The Maven plugin adds support for deploying artifacts to Maven repositories.

## §

### Usage

To use the Maven plugin, include the following in your build script:

#### Example 291. Using the Maven plugin

```
build.gradle
apply plugin: 'maven'
```

## §

### Tasks

The Maven plugin defines the following tasks:

**Table 21. Maven plugin - tasks**

Task name	Depends on	Type	Description
install	All tasks that build the associated archives.	Upload	Installs the associated artifacts to the local Maven cache, including Maven metadata generation. By default the install task is associated with the <code>archives</code> configuration. This configuration has by default only the default jar as an element. To learn more about installing to the local repository, see: the section called “Installing to the local repository”

§

## Dependency management

The Maven plugin does not define any dependency configurations.

§

## Convention properties

The Maven plugin defines the following convention properties:

**Table 22. Maven plugin - properties**

property name	Type	Default value	Description
<code>avenPomDir</code>	File	<code>\${project.buildDir}/poms</code>	The directory where the generated POMs are written to.
<code>onf2ScopeMappings</code>	<a href="#">Conf2ScopeMappingContainer</a>	n/a	Instructions for mapping Gradle configurations to Maven scopes. See the section called “Dependency mapping”.

These properties are provided by a [MavenPluginConvention](#) convention object.

§

## Convention methods

The maven plugin provides a factory method for creating a POM. This is useful if you need a POM without the context of uploading to a Maven repo.

### Example 292. Creating a standalone pom.

#### build.gradle

```
task writeNewPom {
    doLast {
        pom {
            project {
                inceptionYear '2008'
                licenses {
                    license {
                        name 'The Apache Software License, Version 2.0'
                        url 'http://www.apache.org/licenses/LICENSE-2.0.txt'
                        distribution 'repo'
                    }
                }
            }
        }.writeTo("$buildDir/newpom.xml")
    }
}
```

Amongst other things, Gradle supports the same builder syntax as polyglot Maven. To learn more about the Gradle Maven POM object, see [MavenPom](#). See also: [MavenPluginConvention](#)

§

## Interacting with Maven repositories

§

### Introduction

With Gradle you can deploy to remote Maven repositories or install to your local Maven repository. This includes all Maven metadata manipulation and works also for Maven snapshots. In fact, Gradle's deployment is 100 percent Maven compatible as we use the native Maven Ant tasks under the hood.

Deploying to a Maven repository is only half the fun if you don't have a POM. Fortunately Gradle can generate this POM for you using the dependency information it has.

§

### Deploying to a Maven repository

Let's assume your project produces just the default jar file. Now you want to deploy this jar file to a remote Maven repository.



### Example 293. Upload of file to remote Maven repository

#### build.gradle

```
apply plugin: 'maven'

uploadArchives {
    repositories {
        mavenDeployer {
            repository(url: "file://localhost/tmp/myRepo/")
        }
    }
}
```

That is all. Calling the `uploadArchives` task will generate the POM and deploys the artifact and the POM to the specified repository.

There is more work to do if you need support for protocols other than `file`. In this case the native Maven code we delegate to needs additional libraries. Which libraries are needed depends on what protocol you plan to use. The available protocols and the corresponding libraries are listed in Table 23 (those libraries have transitive dependencies which have transitive dependencies).<sup>[10]</sup> For example, to use the `ssh` protocol you can do:

### Example 294. Upload of file via SSH

#### build.gradle

```
configurations {
    deployerJars
}

repositories {
    mavenCentral()
}

dependencies {
    deployerJars "org.apache.maven.wagon:wagon-ssh:2.2"
}

uploadArchives {
    repositories.mavenDeployer {
        configuration = configurations.deployerJars
        repository(url: "scp://repos.mycompany.com/releases") {
            authentication(userName: "me", password: "myPassword")
        }
    }
}
```

There are many configuration options for the Maven deployer. The configuration is done via a Groovy builder. All the elements of this tree are Java beans. To configure the simple attributes you pass a map to

the bean elements. To add bean elements to its parent, you use a closure. In the example above *repository* and *authentication* are such bean elements. Table 24 lists the available bean elements and a link to the Javadoc of the corresponding class. In the Javadoc you can see the possible attributes you can set for a particular element.

In Maven you can define repositories and optionally snapshot repositories. If no snapshot repository is defined, releases and snapshots are both deployed to the *repository* element. Otherwise snapshots are deployed to the *snapshotRepository* element.

**Table 23. Protocol jars for Maven deployment**

Protocol	Library
http	org.apache.maven.wagon:wagon-http:2.2
ssh	org.apache.maven.wagon:wagon-ssh:2.2
ssh-external	org.apache.maven.wagon:wagon-ssh-external:2.2
ftp	org.apache.maven.wagon:wagon-ftp:2.2
webdav	org.apache.maven.wagon:wagon-webdav:1.0-beta-2
none	-

**Table 24. Configuration elements of the MavenDeployer**

Element	Javadoc
deployer	<a href="#">MavenDeployer</a>
repository	org.apache.maven.artifact.ant.RemoteRepository
authentication	org.apache.maven.artifact.ant.Authentication
releases	org.apache.maven.artifact.ant.RepositoryPolicy
snapshots	org.apache.maven.artifact.ant.RepositoryPolicy
proxy	org.apache.maven.artifact.ant.Proxy
snapshotRepository	org.apache.maven.artifact.ant.RemoteRepository

§

## Installing to the local repository

The Maven plugin adds an `install` task to your project. This task depends on all the archives task of the `artifacts` configuration. It installs those archives to your local Maven repository. If the default location for the local repository is redefined in a Maven `settings.xml`, this is considered by this task.

§

## Maven POM generation

When deploying an artifact to a Maven repository, Gradle automatically generates a POM for it. The `groupId`, `artifactId`, `version` and `packaging` elements used for the POM default to the values shown in the table below. The `dependency` elements are created from the project's dependency declarations.

**Table 25. Default Values for Maven POM generation**

Maven Element	Default Value
<code>groupId</code>	<code>project.group</code>
<code>artifactId</code>	<code>uploadTask.repositories.mavenDeployer.pom.artifactId</code> (if set) or <code>archiveTask.baseName</code> .
<code>version</code>	<code>project.version</code>
<code>packaging</code>	<code>archiveTask.extension</code>

Here, `uploadTask` and `archiveTask` refer to the tasks used for uploading and generating the archive, respectively (for example `uploadArchives` and `jar`). `archiveTask.baseName` defaults to `project.archivesName`, which in turn defaults to `project.name`.

**Note:** When you set the “`archiveTask.baseName`” property to a value other than the default, you'll also have to set `uploadTask.repositories.mavenDeployer.pom.artifactId` to the same value. Otherwise, the project at hand may be referenced with the wrong artifact ID from generated POMs for other projects in the same build.

Generated POMs can be found in `<buildDir>/poms`. They can be further customized via the [MavenPom](#) API. For example, you might want the artifact deployed to the Maven repository to have a different version or name than the artifact generated by Gradle. To customize these you can do:

### Example 295. Customization of pom

#### build.gradle

```
uploadArchives {
    repositories {
        mavenDeployer {
            repository(url: "file://localhost/tmp/myRepo/")
            pom.version = '1.0Maven'
            pom.artifactId = 'myMavenName'
        }
    }
}
```

To add additional content to the POM, the `pom.project` builder can be used. With this builder, any element listed in the Maven POM reference can be added.

### Example 296. Builder style customization of pom

#### build.gradle

```
uploadArchives {
    repositories {
        mavenDeployer {
            repository(url: "file://localhost/tmp/myRepo/")
            pom.project {
                licenses {
                    license {
                        name 'The Apache Software License, Version 2.0'
                        url 'http://www.apache.org/licenses/LICENSE-2.0.txt'
                        distribution 'repo'
                    }
                }
            }
        }
    }
}
```

Note: `groupId`, `artifactId`, `version`, and `packaging` should always be set directly on the `pom` object.

### Example 297. Modifying auto-generated content

#### build.gradle

```
def installer = install.repositories.mavenInstaller
def deployer = uploadArchives.repositories.mavenDeployer

[installer, deployer]*.pom*.whenConfigured {pom ->
    pom.dependencies.find {dep -> dep.groupId == 'group3' && dep.artifactId == '':
}
```

If you have more than one artifact to publish, things work a little bit differently. See the section called

“Multiple artifacts per project”.

To customize the settings for the Maven installer (see the section called “Installing to the local repository”), you can do:

#### Example 298. Customization of Maven installer

**build.gradle**

```
install {
    repositories.mavenInstaller {
        pom.version = '1.0Maven'
        pom.artifactId = 'myName'
    }
}
```

§

Multiple artifacts per project

Maven can only deal with one artifact per project. This is reflected in the structure of the Maven POM. We think there are many situations where it makes sense to have more than one artifact per project. In such a case you need to generate multiple POMs. In such a case you have to explicitly declare each artifact you want to publish to a Maven repository. The [MavenDeployer](#) and the `MavenInstaller` both provide an API for this:

#### Example 299. Generation of multiple poms

**build.gradle**

```
uploadArchives {
    repositories {
        mavenDeployer {
            repository(url: "file://localhost/tmp/myRepo/")
            addFilter('api') {artifact, file ->
                artifact.name == 'api'
            }
            addFilter('service') {artifact, file ->
                artifact.name == 'service'
            }
            pom('api').version = 'mySpecialMavenVersion'
        }
    }
}
```

You need to declare a filter for each artifact you want to publish. This filter defines a boolean expression for which Gradle artifact it accepts. Each filter has a POM associated with it which you can configure. To learn more about this have a look at [PomFilterContainer](#) and its associated classes.

§

## Dependency mapping

The Maven plugin configures the default mapping between the Gradle configurations added by the Java and War plugin and the Maven scopes. Most of the time you don't need to touch this and you can safely skip this section. The mapping works like the following. You can map a configuration to one and only one scope. Different configurations can be mapped to one or different scopes. You can also assign a priority to a particular configuration-to-scope mapping. Have a look at [Conf2ScopeMappingContainer](#) to learn more. To access the mapping configuration you can say:

### Example 300. Accessing a mapping configuration

#### **build.gradle**

```
task mappings {  
    doLast {  
        println conf2ScopeMappings.mappings  
    }  
}
```

Gradle exclude rules are converted to Maven excludes if possible. Such a conversion is possible if in the Gradle exclude rule the group as well as the module name is specified (as Maven needs both in contrast to Ivy). Per-configuration excludes are also included in the Maven POM, if they are convertible.

---

[10] It is planned for a future release to provide out-of-the-box support for this

# Dependency management

# Introduction to Dependency Management

§

## What is dependency management?

Software projects rarely work in isolation. In most cases, a project relies on reusable functionality in the form of libraries or is broken up into individual components to compose a modularized system. Dependency management is a technique for declaring, resolving and using dependencies required by the project in an automated fashion.

**Note:** For a general overview on the terms used throughout the user guide, refer to *Dependency Management Terminology*.


§

## Dependency management in Gradle

Gradle has built-in support for dependency management and lives up the task of fulfilling typical scenarios encountered in modern software projects. We'll explore the main concepts with the help of an example project. The illustration below should give you an rough overview on all the moving parts.



Figure 15. Dependency management big picture

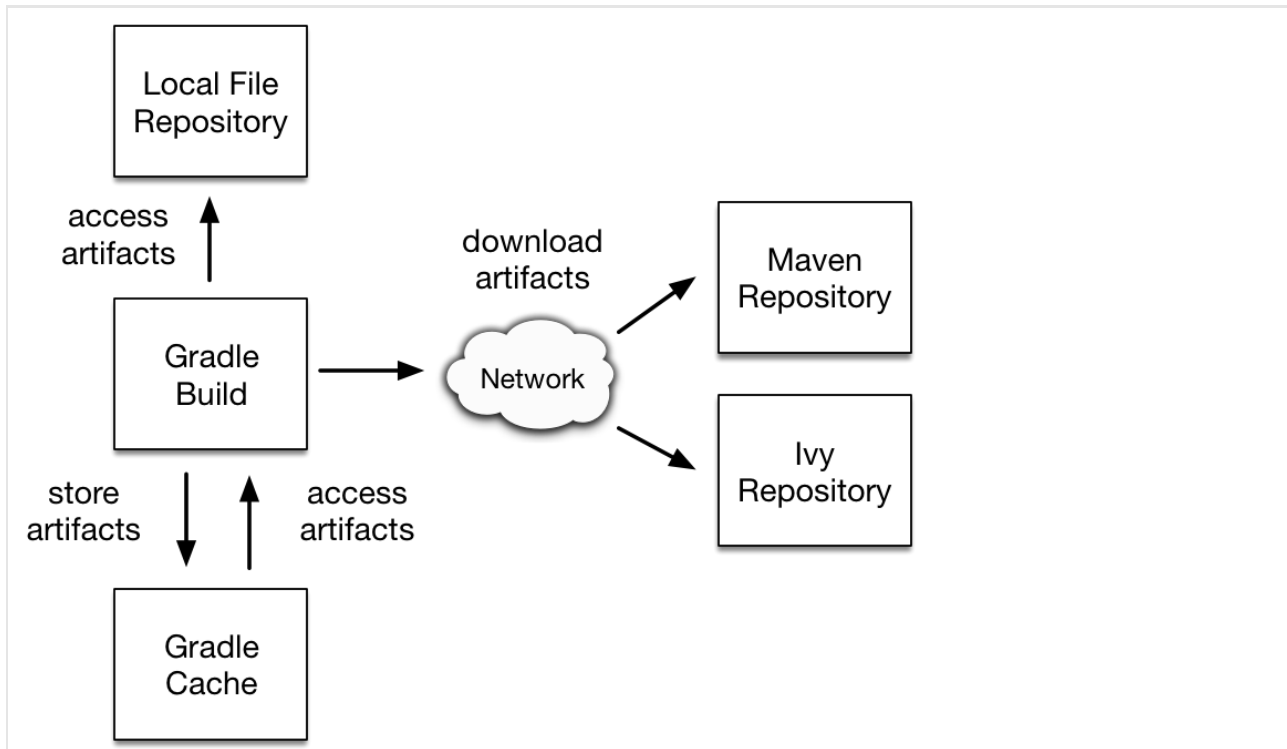

The example project builds Java source code. Some of the Java source files import classes from Google Guava, an open-source library providing a wealth of utility functionality. In addition to Guava, the project needs the JUnit libraries for compiling and executing test code.

Guava and JUnit represent the *dependencies* of this project. A build script developer can declare dependencies for different scopes e.g. just for compilation of source code or for executing tests. In Gradle, the scope of a dependency is called a *configuration*. For a full overview, see the reference material on dependency types.

Often times dependencies come in the form of modules. You'll need to tell Gradle where to find those modules so they can be consumed by the build. The location for storing modules is called a *repository*. By declaring repositories for a build, Gradle will know how to find and retrieve modules. Repositories can come in different forms: as local directory or a remote repository. The reference on repository types provides a broad coverage on this topic.

At runtime, Gradle will locate the declared dependencies if needed for operating a specific task. The dependencies might need to be downloaded from a remote repository, retrieved from a local directory or requires another project to be built in a multi-project setting. This process is called *dependency resolution*. You can find a detailed discussion in the section called "How dependency resolution works".


Once resolved, the resolution mechanism stores the underlying files of a dependency in a local cache, also referred to as the *dependency cache*. Future builds reuse the files stored in the cache to avoid unnecessary network calls.

Modules can provide additional metadata. Metadata is the data that describes the module in more detail e.g. the coordinates for finding it in a repository, information about the project, or its authors. As part of the

metadata, a module can define that other modules are needed for it to work properly. For example, the JUnit 5 platform module also requires the platform commons module. Gradle automatically resolves those additional modules, so called *transitive dependencies*. If needed, you can customize the behavior the handling of transitive dependencies to your project's requirements.

Projects with tens or hundreds of declared dependencies can easily suffer from dependency hell. Gradle provides sufficient tooling to visualize, navigate and analyze the dependency graph of a project either with the help of a build scan or built-in tasks. Learn more in *Inspecting Dependencies*.

**Figure 16. Build scan dependencies report**

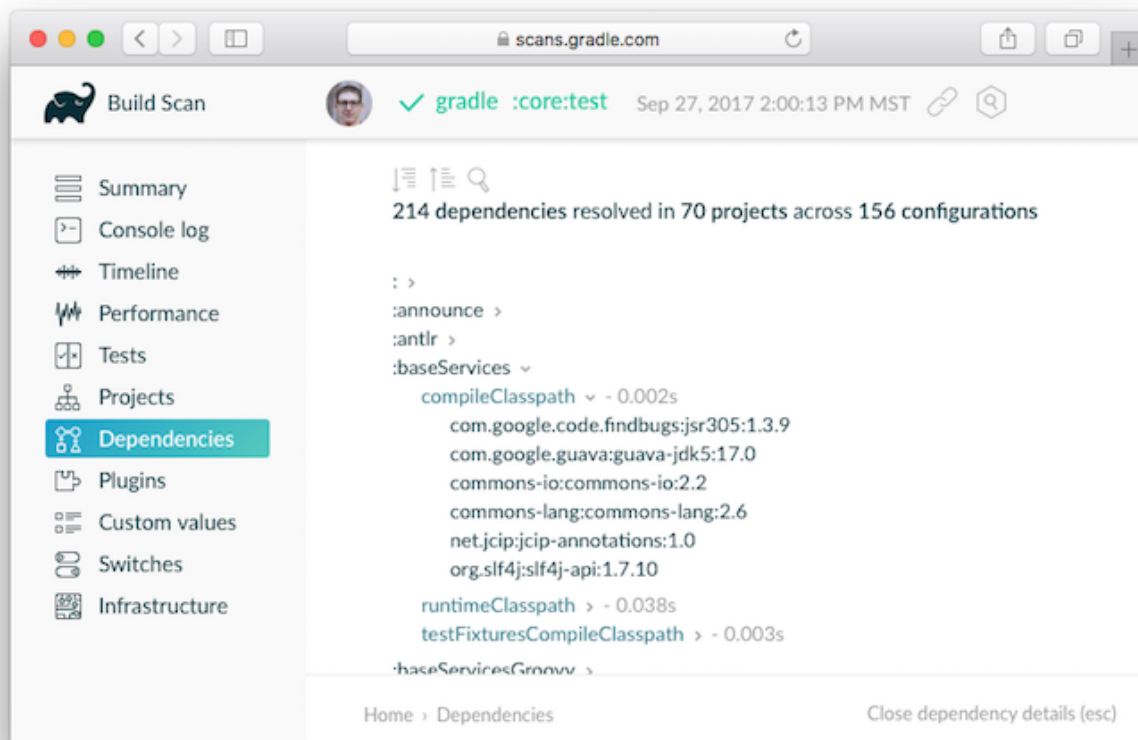

## §

### How dependency resolution works

Gradle takes your dependency declarations and repository definitions and attempts to download all of your dependencies by a process called *dependency resolution*. Below is a brief outline of how this process works.

Given a required dependency, Gradle attempts to resolve the dependency by searching for the module the dependency points at. Each repository is inspected in order. Depending on the type of repository, Gradle looks for metadata files describing the module (`.module`, `.pom` or `ivy.xml` file) or directly for artifact files.

If the dependency is declared as a dynamic version (like `1.+`), Gradle will resolve this to the highest available concrete version (like `1.2`) in the repository. For Maven repositories, this is done using the `maven-`

file, while for Ivy repositories this is done by directory listing.

If the module metadata is a POM file that has a parent POM declared, Gradle will recursively attempt to resolve each of the parent modules for the POM.

Once each repository has been inspected for the module, Gradle will choose the 'best' one to use. This is done using the following criteria:

For a dynamic version, a 'higher' concrete version is preferred over a 'lower' version.

Modules declared by a module metadata file (`.module`, `.pom` or `ivy.xml` file) are preferred over modules that have an artifact file only.

Modules from earlier repositories are preferred over modules in later repositories.

When the dependency is declared by a concrete version and a module metadata file is found in a repository, there is no need to continue searching later repositories and the remainder of the process is short-circuited.

All of the artifacts for the module are then requested from the *same repository* that was chosen in the process above.

The dependency resolution process is highly customizable to meet enterprise requirements. For more information, see the chapter on *Customizing Dependency Resolution Behavior*.

# Declaring Dependencies

Gradle builds can declare dependencies on modules hosted in repositories, files and other Gradle projects. You can find examples for common scenarios in this section. For more information, see the full reference on all types of dependencies.


Every dependency needs to be assigned to a configuration when declared in a build script. For more information on the purpose and syntax of configurations, see *Managing Dependency Configurations*.

§

## Declaring a dependency to a module

Modern software projects rarely build code in isolation. Projects reference modules for the purpose of reusing existing and proven functionality. Upon resolution, selected versions of modules are downloaded from dedicated repositories and stored in the dependency cache to avoid unnecessary network traffic.

**Figure 17. Resolving dependencies from remote repositories**

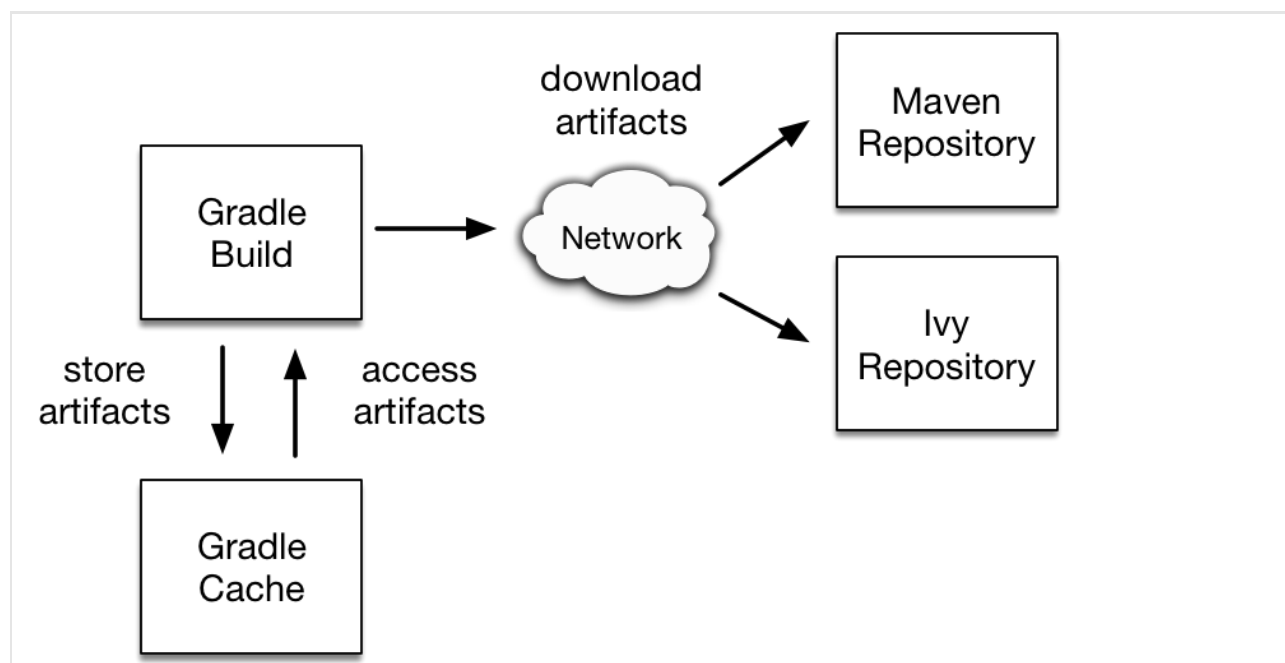

§

## Declaring a concrete version of a dependency

A typical example for such a library in a Java project is the Spring framework. The following code snippet declares a compile-time dependency on the Spring web module by its coordinates: `org.springframework`. Gradle resolves the module including its transitive dependencies from the Maven Central repository and uses it to compile Java source code. The version attribute of the dependency coordinates points to a *concrete version* indicating that the underlying artifacts do not change over time. The use of concrete versions ensure reproducibility for the aspect of dependency resolution.

### Example 301. Declaring a dependency with a concrete version

**build.gradle**

```
apply plugin: 'java-library'

repositories {
    mavenCentral()
}

dependencies {
    implementation 'org.springframework:spring-web:5.0.2.RELEASE'
}
```

A Gradle project can define other types of repositories hosting modules. You can learn more about the syntax and API in the section on declaring repositories. Refer to *The Java Plugin* for a deep dive on declaring dependencies for a Java project. The resolution behavior for dependencies is highly customizable.

§

## Declaring a dependency without version

A recommended practice for larger projects is to declare dependencies without versions and use dependency constraints for version declaration. The advantage is that dependency constraints allow you to manage versions of all dependencies, including transitive ones, in one place.

### Example 302. Declaring a dependency without version

**build.gradle**

```
dependencies {
    implementation 'org.springframework:spring-web'
}

dependencies {
    constraints {
        implementation 'org.springframework:spring-web:5.0.2.RELEASE'
    }
}
```

§

## Declaring a dynamic version

Projects might adopt a more aggressive approach for consuming dependencies to modules. For example you might want to always integrate the latest version of a dependency to consume cutting edge features at any given time. A *dynamic version* allows for resolving the latest version or the latest version of a version range for a given module.

**Note:** Using dynamic versions in a build bears the risk of potentially breaking it. As soon as a new version of the dependency is released that contains an incompatible API change your source code might stop compiling.

### Example 303. Declaring a dependency with a dynamic version

#### build.gradle


```
apply plugin: 'java-library'

repositories {
    mavenCentral()
}

dependencies {
    implementation 'org.springframework:spring-web:5.+'
}
```

A build scan can effectively visualize dynamic dependency versions and their respective, selected versions.

Figure 18. Dynamic dependencies in build scan

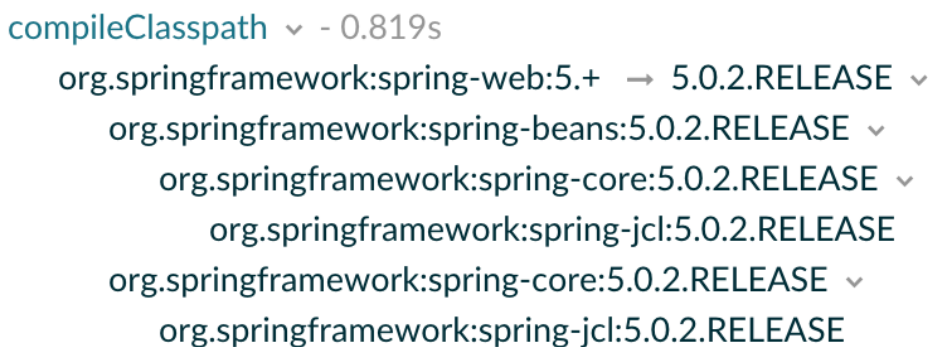

The image shows a build scan snippet for the 'compileClasspath' task, which took 0.819s. It lists several dependencies from 'org.springframework' with dynamic version ranges (e.g., '5.+') and shows the resolved versions (e.g., '5.0.2.RELEASE'). Each resolved version has a small downward arrow next to it, indicating it was selected from a range.

```
compileClasspath ▾ - 0.819s
  org.springframework:spring-web:5.+ → 5.0.2.RELEASE ▾
    org.springframework:spring-beans:5.0.2.RELEASE ▾
      org.springframework:spring-core:5.0.2.RELEASE ▾
        org.springframework:spring-jcl:5.0.2.RELEASE
    org.springframework:spring-core:5.0.2.RELEASE ▾
      org.springframework:spring-jcl:5.0.2.RELEASE
```

By default, Gradle caches dynamic versions of dependencies for 24 hours. Within this time frame, Gradle does not try to resolve newer versions from the declared repositories. The threshold can be configured as needed for example if you want to resolve new versions earlier.

§

## Declaring a changing version

A team might decide to implement a series of features before releasing a new version of the application or library. A common strategy to allow consumers to integrate an unfinished version of their artifacts early and often is to release a module with a so-called *changing version*. A changing version indicates that the feature set is still under active development and hasn't released a stable version for general availability yet.

In Maven repositories, changing versions are commonly referred to as snapshot versions. Snapshot versions contain the suffix `-SNAPSHOT`. The following example demonstrates how to declare a snapshot version on the Spring dependency.

### Example 304. Declaring a dependency with a changing version

#### **build.gradle**

```
apply plugin: 'java-library'

repositories {
    mavenCentral()
    maven {
        url 'https://repo.spring.io/snapshot/'
    }
}

dependencies {
    implementation 'org.springframework:spring-web:5.0.3.BUILD-SNAPSHOT'
}
```

By default, Gradle caches changing versions of dependencies for 24 hours. Within this time frame, Gradle does not try to resolve newer versions from the declared repositories. The threshold can be configured as needed for example if you want to resolve new snapshot versions earlier.


Gradle is flexible enough to treat any version as changing version e.g. if you wanted to model snapshot behavior for an Ivy module. All you need to do is to set the property `ExternalModuleDependency.setChanging(boolean)` to `true`.

§

## Declaring a file dependency

Projects sometimes do not rely on a binary repository product e.g. JFrog Artifactory or Sonatype Nexus for hosting and resolving external dependencies. It's common practice to host those dependencies on a shared drive or check them into version control alongside the project source code. Those dependencies are referred to as *file dependencies*, the reason being that they represent a file without any metadata (like information about transitive dependencies, the origin or its author) attached to them.

Figure 19. Resolving file dependencies from the local file system and a shared drive

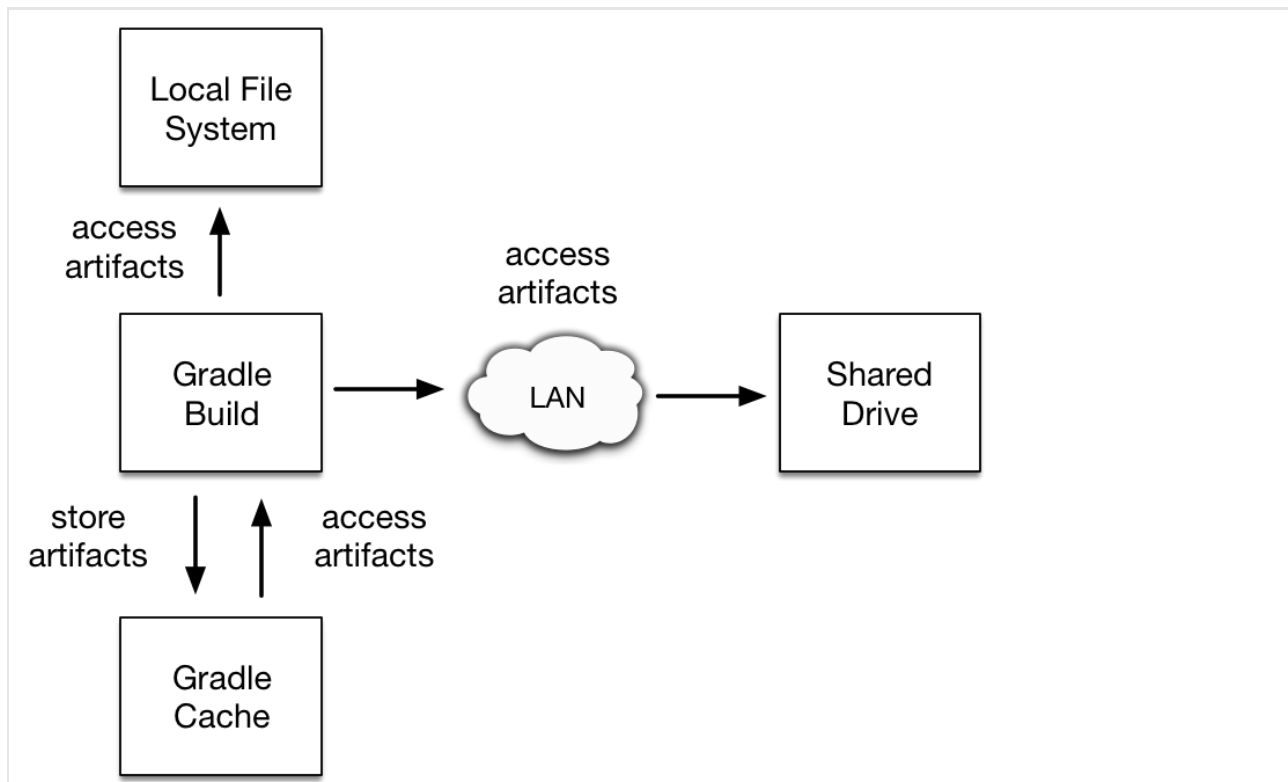

The following example resolves file dependencies from the directories `ant`, `libs` and `tools`.

#### Example 305. Declaring multiple file dependencies

##### **build.gradle**

```
configurations {
    antContrib
    externalLibs
    deploymentTools
}

dependencies {
    antContrib files('ant/antcontrib.jar')
    externalLibs files('libs/commons-lang.jar', 'libs/log4j.jar')
    deploymentTools fileTree(dir: 'tools', include: '*.exe')
}
```

As you can see in the code example, every dependency has to define its exact location in the file system. The most prominent methods for creating a file reference are `Project.files(java.lang.Object[])`, `ProjectLayout.files(java.lang.Object[])`, `ProjectLayout.configurableFiles(java.lang.Object[])`, and `Project.fileTree(java.lang.Object)`. Alternatively, you can also define the source directory of one or many file dependencies in the form of a flat directory repository.




## §

### Declaring a project dependency

Software projects often break up software components into modules to improve maintainability and prevent strong coupling. Modules can define dependencies between each other to reuse code within the same project.

Gradle can model dependencies between modules. Those dependencies are called *project dependencies* because each module is represented by a Gradle project. At runtime, the build automatically ensures that project dependencies are built in the correct order and added to the classpath for compilation. The chapter *Authoring Multi-Project Builds* discusses how to set up and configure multi-project builds in more detail.

**Figure 20. Dependencies between projects**

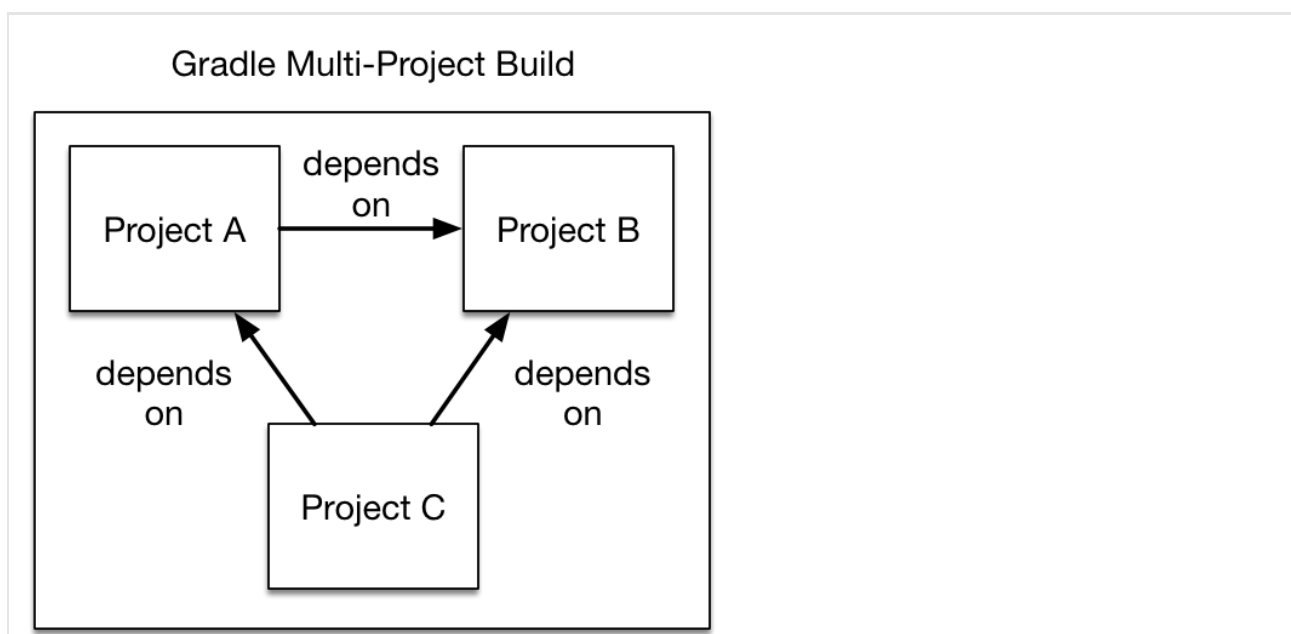

The following example declares the dependencies on the `utils` and `api` project from the `web-service` project. The method `Project.project(java.lang.String)` creates a reference to a specific subproject by path.

#### Example 306. Declaring project dependencies

```
build.gradle
project(':web-service') {
    dependencies {
        implementation project(':utils')
        implementation project(':api')
    }
}
```

## §

### Resolving specific artifacts from a module dependency

Whenever Gradle tries to resolve a module from a Maven or Ivy repository, it looks for a metadata file and the default artifact file, a JAR. The build fails if none of these artifact files can be resolved. Under certain conditions, you might want to tweak the way Gradle resolves artifacts for a dependency.

The dependency only provides a non-standard artifact without any metadata e.g. a ZIP file.

The module metadata declares more than one artifact e.g. as part of an Ivy dependency descriptor.

You only want to download a specific artifact without any of the transitive dependencies declared in the metadata.

Gradle is a polyglot build tool and not limited to just resolving Java libraries. Let's assume you wanted to build a web application using JavaScript as the client technology. Most projects check in external JavaScript libraries into version control. An external JavaScript library is no different than a reusable Java library so why not download it from a repository instead?

Google Hosted Libraries is a distribution platform for popular, open-source JavaScript libraries. With the help of the artifact-only notation you can download a JavaScript library file e.g. JQuery. The @ character separates the dependency's coordinates from the artifact's file extension.

#### Example 307. Resolving a JavaScript artifact for a declared dependency

##### build.gradle

```
repositories {
    ivy {
        url 'https://ajax.googleapis.com/ajax/libs'
        layout 'pattern', {
            artifact '[organization]/[revision]/[module].[ext]'
        }
    }
}

configurations {
    js
}

dependencies {
    js 'jquery:jquery:3.2.1@js'
}
```

Some modules ship different "flavors" of the same artifact or they publish multiple artifacts that belong to a specific module version but have a different purpose. It's common for a Java library to publish the artifact with the compiled class files, another one with just the source code in it and a third one containing the Javadocs.

In JavaScript, a library may exist as uncompressed or minified artifact. In Gradle, a specific artifact identifier is called *classifier*, a term generally used in Maven and Ivy dependency management.

Let's say we wanted to download the minified artifact of the JQuery library instead of the uncompressed file. You can provide the classifier `min` as part of the dependency declaration.

#### Example 308. Resolving a JavaScript artifact with classifier for a declared dependency

##### **build.gradle**

```
repositories {
    ivy {
        url 'https://ajax.googleapis.com/ajax/libs'
        layout 'pattern', {
            artifact '[organization]/[revision]/[module](.[classifier]).[ext]'
        }
    }
}

configurations {
    js
}

dependencies {
    js 'jquery:jquery:3.2.1:min@js'
}
```

# Managing Dependency Configurations


§

## What is a configuration?

Every dependency declared for a Gradle project applies to a specific scope. For example some dependencies should be used for compiling source code whereas others only need to be available at runtime. Gradle represents the scope of a dependency with the help of a [Configuration](#). Every configuration can be identified by a unique name.

Many Gradle plugins add pre-defined configurations to your project. The Java plugin, for example, adds configurations to represent the various classpaths it needs for source code compilation, executing tests and the like. See the Java plugin chapter for an example. The sections above demonstrate how to declare dependencies for different use cases.

**Figure 21. Configurations use declared dependencies for specific purposes**

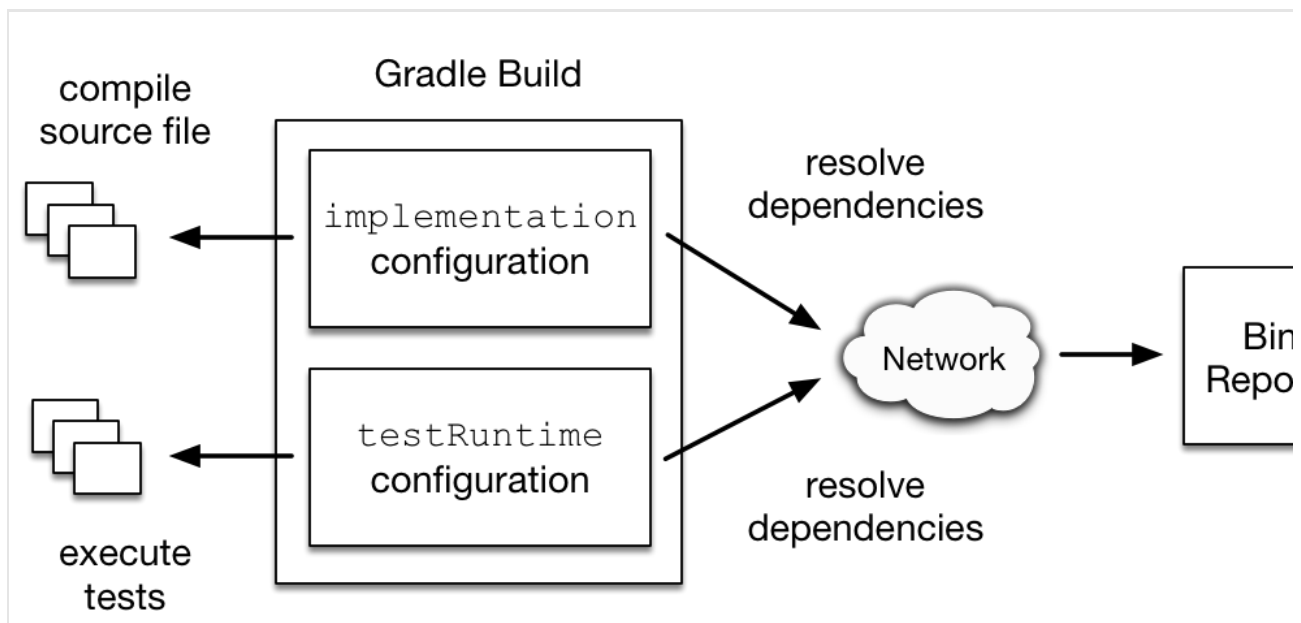

For more examples on the usage of configurations to navigate, inspect and post-process metadata and artifacts of assigned dependencies, see *Working with Dependencies*.

§

## Defining custom configurations

You can define configurations yourself, so-called *custom configurations*. A custom configuration is useful for separating the scope of dependencies needed for a dedicated purpose.

Let's say you wanted to declare a dependency on the Jasper Ant task for the purpose of pre-compiling JSP files that should *not* end up in the classpath for compiling your source code. It's fairly simple to achieve that goal by introducing a custom configuration and using it in a task.

### Example 309. Declaring and using a custom configuration

```
build.gradle
configurations {
    jasper
}

repositories {
    mavenCentral()
}

dependencies {
    jasper 'org.apache.tomcat.embed:tomcat-embed-jasper:9.0.2'
}

task preCompileJsps {
    doLast {
        ant.taskdef(classname: 'org.apache.jasper.JspC',
                    name: 'jasper',
                    classpath: configurations.jasper.asPath)
        ant.jasper(validateXml: false,
                    uriroot: file('src/main/webapp'),
                    outputDir: file("$buildDir/compiled-jsps"))
    }
}
```

A project's configurations are managed by a `configurations` object. Configurations have a name and can extend each other. To learn more about this API have a look at [ConfigurationContainer](#).

§

## Inheriting dependencies from other configurations

A configuration can extend other configurations to form an inheritance hierarchy. Child configurations inherit the whole set of dependencies declared for any of its superconfigurations.

Configuration inheritance is heavily used by Gradle core plugins like the Java plugin. For example the `testI` configuration extends the `implementation` configuration. The configuration hierarchy has a practical

purpose: compiling tests requires the dependencies of the source code under test on top of the dependencies needed write the test class. A Java project that uses JUnit to write and execute test code also needs Guava if its classes are imported in the production source code.

**Figure 22. Configuration inheritance provided by the Java plugin**



Under the covers the `testImplementation` and `implementation` configurations form an inheritance hierarchy by calling the method `Configuration.extendsFrom(org.gradle.api.artifacts.Configuration[])`. A configuration can extend any other configuration irrespective of its definition in the build script or a plugin.

Let's say you wanted to write a suite of smoke tests. Each smoke test makes a HTTP call to verify a web service endpoint. As the underlying test framework the project already uses JUnit. You can define a new configuration named `smokeTest` that extends from the `testImplementation` configuration to reuse the existing test framework dependency.

#### **Example 310. Extending a configuration from another configuration**

##### **build.gradle**

```
configurations {
    smokeTest.extendsFrom testImplementation
}

dependencies {
    testImplementation 'junit:junit:4.12'
    smokeTest 'org.apache.httpcomponents:httpclient:4.5.5'
}
```

# Declaring Repositories


Gradle can resolve dependencies from one or many repositories based on Maven, Ivy or flat directory formats. Check out the full reference on all types of repositories for more information.

§

## Declaring a publicly-available repository

Organizations building software may want to leverage public binary repositories to download and consume open source dependencies. Popular public repositories include Maven Central, Bintray JCenter and the Google Android repository. Gradle provides built-in shortcut methods for the most widely-used repositories.

**Figure 23. Declaring a repository with the help of shortcut methods**

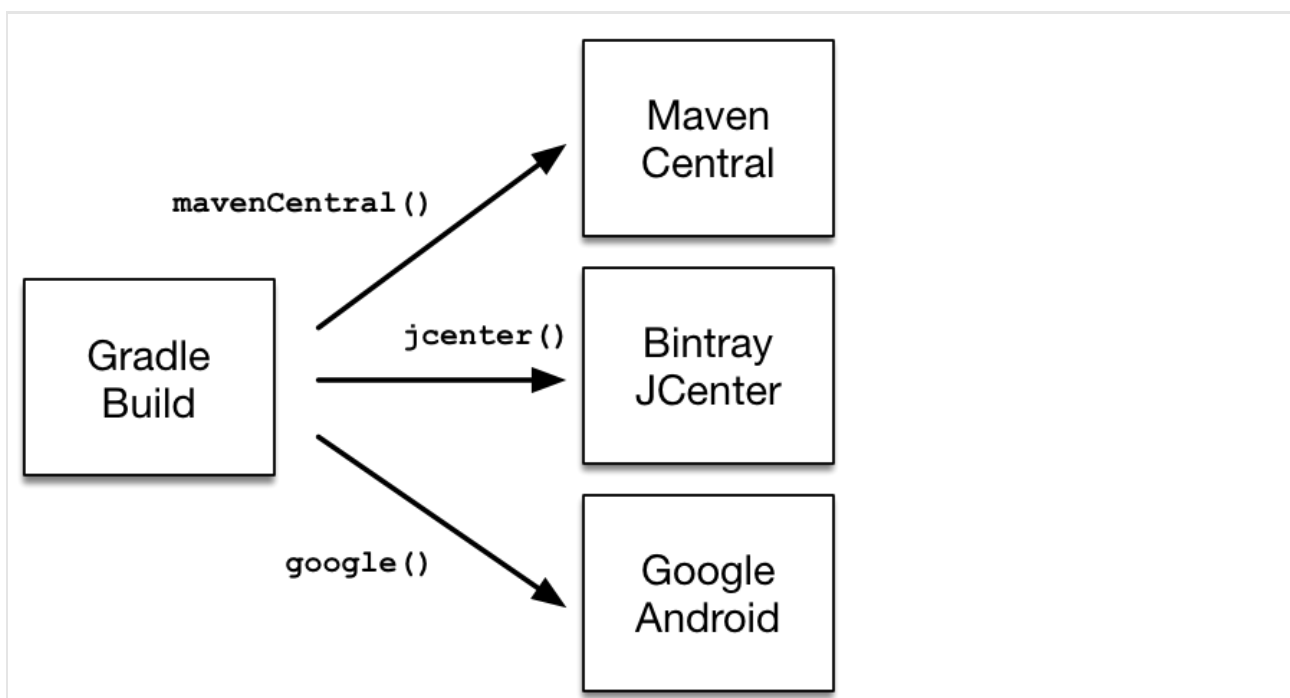

To declare JCenter as repository, add this code to your build script:

### Example 311. Declaring JCenter repository as source for resolving dependencies

**build.gradle**

```
repositories {  
    jcenter()  
}
```

Under the covers Gradle resolves dependencies from the respective URL of the public repository defined by the shortcut method. All shortcut methods are available via the [RepositoryHandler](#) API. Alternatively, you can spell out the URL of the repository for more fine-grained control.

§

## Declaring a custom repository by URL

Most enterprise projects set up a binary repository available only within an intranet. In-house repositories enable teams to publish internal binaries, setup user management and security measure and ensure uptime and availability. Specifying a custom URL is also helpful if you want to declare a less popular, but publicly-available repository.

Add the following code to declare an in-house repository for your build reachable through a custom URL.

### Example 312. Declaring a custom repository by URL

**build.gradle**

```
repositories {  
    maven {  
        url "http://repo.mycompany.com/maven2"  
    }  
}
```

Repositories with custom URLs can be specified as Maven or Ivy repositories by calling the corresponding methods available on the [RepositoryHandler](#) API. Gradle supports other protocols than `http` or `https` as part of the custom URL e.g. `file`, `sftp` or `s3`. For a full coverage see the reference manual on supported transport protocols.

You can also define your own repository layout by using `ivy { }` repositories as they are very flexible in terms of how modules are organised in a repository.

§

## Declaring multiple repositories

You can define more than one repository for resolving dependencies. Declaring multiple repositories is helpful if some dependencies are only available in one repository but not the other. You can mix any type of repository described in the reference section.

This example demonstrates how to declare various shortcut and custom URL repositories for a project:



### Example 313. Declaring multiple repositories

#### **build.gradle**

```
repositories {  
    jcenter()  
    maven {  
        url "https://maven.springframework.org/release"  
    }  
    maven {  
        url "https://maven.restlet.com"  
    }  
}
```

**Note:** The order of declaration determines how Gradle will check for dependencies at runtime. If Gradle finds a module descriptor in a particular repository, it will attempt to download all of the artifacts for that module from *the same repository*. You can learn more about the inner workings of Gradle's resolution mechanism.

# Inspecting Dependencies

Gradle provides sufficient tooling to navigate large dependency graphs and mitigate situations that can lead to dependency hell. Users can choose to render the full graph of dependencies as well as identify the selection reason and origin for a dependency. The origin of a dependency can be a declared dependency in the build script or a transitive dependency in graph plus their corresponding configuration. Gradle offers both capabilities through visual representation via build scans and as command line tooling.

§

## Listing dependencies in a project

A project can declare one or more dependencies. Gradle can visualize the whole dependency tree for every configuration available in the project.

Rendering the dependency tree is particularly useful if you'd like to identify which dependencies have been resolved at runtime. It also provides you with information about any dependency conflict resolution that occurred in the process and clearly indicates the selected version. The dependency report always contains declared and transitive dependencies.

Let's say you'd want to create tasks for your project that use the JGit library to execute SCM operations e.g. to model a release process. You can declare dependencies for any external tooling with the help of a custom configuration so that it doesn't pollute other contexts like the compilation classpath for your production source code.

### Example 314. Declaring the JGit dependency with a custom configuration

```
build.gradle
repositories {
    jcenter()
}

configurations {
    scm
}

dependencies {
    scm 'org.eclipse.jgit:org.eclipse.jgit:4.9.2.201712150930-r'
```

A build scan can visualize dependencies as a navigable, searchable tree. Additional context information can be rendered by clicking on a specific dependency in the graph.

**Figure 24. Dependency tree in a build scan**



Every Gradle project provides the task `dependencies` to render the so-called *dependency report* from the command line. By default the dependency report renders dependencies for all configurations. To pair down on the information provide the optional parameter `--configuration`.

#### Example 315. Rendering the dependency report for a custom configuration

Output of `gradle -q dependencies --configuration scm`

```
> gradle -q dependencies --configuration scm
```

```
-----
Root project
-----
```

```
scm
```

```
\--- org.eclipse.jgit:org.eclipse.jgit:4.9.2.201712150930-r
    +--- com.jcraft:jsch:0.1.54
    +--- com.googlecode.javaewah:JavaEWAH:1.1.6
    +--- org.apache.httpcomponents:httpclient:4.3.6
        |   +--- org.apache.httpcomponents:httpcore:4.3.3
        |   +--- commons-logging:commons-logging:1.1.3
        |   \--- commons-codec:commons-codec:1.6
    \--- org.slf4j:slf4j-api:1.7.2
```

A web-based, searchable dependency report is available by adding the `--scan` option

The dependencies report provides detailed information about the dependencies available in the graph. Any dependency that could not be resolved is marked with `FAILED` in red color. Dependencies with the same coordinates that can occur multiple times in the graph are omitted and indicated by an asterisk. Dependencies that had to undergo conflict resolution render the requested and selected version separated by a right arrow character.

## §

### Identifying which dependency version was selected and why

Large software projects inevitably deal with an increased number of dependencies either through direct or transitive dependencies. The dependencies report provides you with the raw list of dependencies but does not explain *why* they have been selected or *which* dependency is responsible for pulling them into the graph.

Let's have a look at a concrete example. A project may request two different versions of the same dependency either as direct or transitive dependency. Gradle applies version conflict resolution to ensure that only one version of the dependency exists in the dependency graph. In this example the conflicting dependency is represented by `commons-codec:commons-codec`.

#### Example 316. Declaring the JGit dependency and a conflicting dependency

```
build.gradle
repositories {
    jcenter()
}

configurations {
    scm
}

dependencies {
    scm 'org.eclipse.jgit:org.eclipse.jgit:4.9.2.201712150930-r'
    scm 'commons-codec:commons-codec:1.7'
}
```

The dependency tree in a build scan renders the selection reason (conflict resolution) as well as the origin of a dependency if you click on a dependency and select the "Required By" tab.

**Figure 25. Dependency insight capabilities in a build scan**



Every Gradle project provides the task `dependencyInsight` to render the so-called *dependency insight report* from the command line. Given a dependency in the dependency graph you can identify the selection reason and track down the origin of the dependency selection. You can think of the dependency insight report as the inverse representation of the dependency report for a given dependency. When executing the task you have to provide the mandatory parameter `--dependency` to specify the coordinates of the dependency under inspection. The parameters `--configuration` and `--singlepath` are optional but help with filtering the output.

#### Example 317. Using the dependency insight report for a given dependency

Output of `gradle -q dependencyInsight --dependency commons-codec --configuration scm`

```
> gradle -q dependencyInsight --dependency commons-codec --configuration scm
commons-codec:commons-codec:1.7
  variant "default+runtime" [
    org.gradle.status = release (not requested)
  ]
Selection reasons:
  - Was requested
  - By conflict resolution : between versions 1.7 and 1.6

commons-codec:commons-codec:1.7
\--- scm

commons-codec:commons-codec:1.6 -> 1.7
\--- org.apache.httpcomponents:httpclient:4.3.6
      \--- org.eclipse.jgit:org.eclipse.jgit:4.9.2.201712150930-r
            \--- scm
```

A web-based, searchable dependency report is available by adding the `--scan` option

## §

### Justifying dependency declarations with custom reasons

When you declare a dependency or a dependency constraint, you can provide a custom reason for the declaration. This makes the dependency declarations in your build script and the dependency insight report easier to interpret.

#### Example 318. Giving a reason for choosing a certain module version in a dependency declaration

```
build.gradle
apply plugin: 'java-library'

repositories {
    jcenter()
}

dependencies {
    implementation('org.ow2.asm:asm:6.0') {
        because 'we require a JDK 9 compatible bytecode generator'
    }
}
```

#### Example 319. Using the dependency insight report with custom reasons

##### Output of `gradle -q dependencyInsight --dependency asm`

```
> gradle -q dependencyInsight --dependency asm
org.ow2.asm:asm:6.0
  variant "compile" [
    org.gradle.status = release (not requested)
    org.gradle.usage   = java-api
  ]
  Selection reasons:
    - Was requested : we require a JDK 9 compatible bytecode generator

org.ow2.asm:asm:6.0
\--- compileClasspath
```

A web-based, searchable dependency report is available by adding the `--scan` option.

# Managing Transitive Dependencies

Resolution behavior for transitive dependencies can be customized to a high degree to meet enterprise requirements.

§

## Managing versions of transitive dependencies with dependency constraints

Dependency constraints allow you to define the version or the version range of both dependencies declared in the build script and transitive dependencies. It is the preferred method to express constraints that should be applied to all dependencies of a configuration. When Gradle attempts to resolve a dependency to a module version, all dependency declarations with version, all transitive dependencies and all dependency constraints for that module are taken into consideration. The highest version that matches all conditions is selected. If no such version is found, Gradle fails with an error showing the conflicting declarations. If this happens you can adjust your dependencies or dependency constraints declarations, or make other adjustments to the transitive dependencies if needed. Similar to dependency declarations, dependency constraint declarations are scoped by configurations and can therefore be selectively defined for parts of a build. If a dependency constraint influenced the resolution result, any type of dependency resolve rules may still be applied afterwards.

### Example 320. Define dependency constraints

**build.gradle**

```
dependencies {
    implementation 'org.apache.httpcomponents:httpclient'
    constraints {
        implementation('org.apache.httpcomponents:httpclient:4.5.3') {
            because 'previous versions have a bug impacting this application'
        }
        implementation('commons-codec:commons-codec:1.11') {
            because 'version 1.9 pulled from httpclient has bugs affecting this application'
        }
    }
}
```

In the example, all versions are omitted from the dependency declaration. Instead, the versions are defined in the constraints block. The version definition for `commons-codec:1.11` is only taken into account if `commons-codec`

is brought in as transitive dependency, since `commons-codec` is not defined as dependency in the project. Otherwise, the constraint has no effect.

**Note:** Dependency constraints are not yet published, but that will be added in a future release. This means that their use currently only targets builds that do not publish artifacts to maven or ivy repositories.

Dependency constraints themselves can also be added transitively. If a module's metadata is defined in a `.pom` file that contains dependency entries with `<optional>true</optional>`, Gradle will create a dependency constraint for each of these so-called *optional dependencies*. This leads to a similar resolution behavior as provided by Maven: if the corresponding module is brought in by another, non-optional dependency declaration, then the constraint will apply when choosing the version for that module (e.g., if the optional dependency defines a higher version, that one is chosen).

**Note:** Support for *optional dependencies* from pom files is active by default with Gradle 5.0+. For using it in Gradle 4.6+, you need to activate it by adding `enableFeaturePreview('IMPROVED_POM_SUPPORT')` in `settings.gradle`.

## §

### Excluding transitive module dependencies

Declared dependencies in a build script can pull in a lot of transitive dependencies. You might decide that you do not want a particular transitive dependency as part of the dependency graph for a good reason.

The dependency is undesired due to licensing constraints.

The dependency is not available in any of the declared repositories.

The metadata for the dependency exists but the artifact does not.

The metadata provides incorrect coordinates for a transitive dependency.

Transitive dependencies can be excluded on the level of a declared dependency or a configuration. Let's demonstrate both use cases. In the following two examples the build script declares a dependency on Log4J, a popular logging framework in the Java world. The metadata of the particular version of Log4J also defines transitive dependencies.



### Example 321. Unresolved artifacts for transitive dependencies

#### build.gradle

```
apply plugin: 'java'

repositories {
    mavenCentral()
}

dependencies {
    implementation 'log4j:log4j:1.2.15'
}
```

If resolved from Maven Central some of the transitive dependencies provide metadata but not the corresponding binary artifact. As a result any task requiring the binary files will fail e.g. a compilation task.

```
> gradle -q compileJava

* What went wrong:
Could not resolve all files for configuration ':compileClasspath'.
> Could not find jms.jar (javax.jms:jms:1.1).
   Searched in the following locations:
       https://repo.maven.apache.org/maven2/javax/jms/jms/1.1/jms-1.1.jar
> Could not find jmxtools.jar (com.sun.jdmk:jmxtools:1.2.1).
   Searched in the following locations:
       https://repo.maven.apache.org/maven2/com/sun/jdmk/jmxtools/1.2.1/jmxtools-1.2.1.jar
> Could not find jmxri.jar (com.sun.jmx:jmxri:1.2.1).
   Searched in the following locations:
       https://repo.maven.apache.org/maven2/com/sun/jmx/jmxri/1.2.1/jmxri-1.2.1.jar
```

The situation can be fixed by adding a repository containing those dependencies. In the given example project, the source code does not actually use any of Log4J's functionality that require the JMS (e.g. [JMSApp](#)) or JMX libraries. It's safe to exclude them from the dependency declaration.

Exclusions need to be spelled out as a key/value pair via the attributes `group` and/or `module`. For more information, refer to [ModuleDependency.exclude\(java.util.Map\)](#).

### Example 322. Excluding transitive dependency for a particular dependency declaration

#### build.gradle

```
dependencies {
    implementation('log4j:log4j:1.2.15') {
        exclude group: 'javax.jms', module: 'jms'
        exclude group: 'com.sun.jdmk', module: 'jmxtools'
        exclude group: 'com.sun.jmx', module: 'jmxri'
    }
}
```

You may find that other dependencies will want to pull in the same transitive dependency that misses the

artifacts. Alternatively, you can exclude the transitive dependencies for a particular configuration by calling the method `Configuration.exclude(java.util.Map)`.

### Example 323. Excluding transitive dependency for a particular configuration

#### build.gradle

```
configurations {
    implementation {
        exclude group: 'javax.jms', module: 'jms'
        exclude group: 'com.sun.jdmk', module: 'jmxtools'
        exclude group: 'com.sun.jmx', module: 'jmxri'
    }
}

dependencies {
    implementation 'log4j:log4j:1.2.15'
}
```

**Note:** As a build script author you often times know that you want to exclude a dependency for all configurations available in the project. You can use the method `DomainObjectCollection.all(org.gradle.api.Action)` to define a global rule.

You might encounter other use cases that don't quite fit the bill of an exclude rule. For example you want to automatically select a version for a dependency with a specific requested version or you want to select a different group for a requested dependency to react to a relocation. Those use cases are better solved by the `ResolutionStrategy` API. Some of these use cases are covered in *Customizing Dependency Resolution Behavior*.

## §

### Enforcing a particular dependency version

Gradle resolves any dependency version conflicts by selecting the latest version found in the dependency graph. Some projects might need to divert from the default behavior and enforce an earlier version of a dependency e.g. if the source code of the project depends on an older API of a dependency than some of the external libraries.

**Note:** Enforcing a version of a dependency requires a conscious decision. Changing the version of a transitive dependency might lead to runtime errors if external libraries do not properly function without them. Consider upgrading your source code to use a newer version of the library as an alternative approach.

Let's say a project uses the `HttpClient` library for performing HTTP calls. `HttpClient` pulls in `Commons Codec` as transitive dependency with version 1.10. However, the production source code of the project requires an API from `Commons Codec` 1.9 which is not available in 1.10 anymore. A dependency version can be enforced by declaring it in the build script and setting `ExternalDependency.setForce(boolean)` to `true`.

### Example 324. Enforcing a dependency version

**build.gradle**

```
dependencies {
    implementation 'org.apache.httpcomponents:httpclient:4.5.4'
    implementation('commons-codec:commons-codec:1.9') {
        force = true
    }
}
```

If the project requires a specific version of a dependency on a configuration-level then it can be achieved by calling the method `ResolutionStrategy.force(java.lang.Object[])`.

### Example 325. Enforcing a dependency version on the configuration-level

**build.gradle**

```
configurations {
    compileClasspath {
        resolutionStrategy.force 'commons-codec:commons-codec:1.9'
    }
}

dependencies {
    implementation 'org.apache.httpcomponents:httpclient:4.5.4'
}
```

§

## Disabling resolution of transitive dependencies

By default Gradle resolves all transitive dependencies specified by the dependency metadata. Sometimes this behavior may not be desirable e.g. if the metadata is incorrect or defines a large graph of transitive dependencies. You can tell Gradle to disable transitive dependency management for a dependency by setting `ModuleDependency.setTransitive(boolean)` to `true`. As a result only the main artifact will be resolved for the declared dependency.

### Example 326. Disabling transitive dependency resolution for a declared dependency

**build.gradle**

```
dependencies {
    implementation('com.google.guava:guava:23.0') {
        transitive = false
    }
}
```

**Note:** Disabling transitive dependency resolution will likely require you to declare the necessary runtime dependencies in your build script which otherwise would have been resolved automatically. Not doing so might lead to runtime classpath issues.

A project can decide to disable transitive dependency resolution completely. You either don't want to rely on the metadata published to the consumed repositories or you want to gain full control over the dependencies in your graph. For more information, see `Configuration.setTransitive(boolean)`.

#### Example 327. Disabling transitive dependency resolution on the configuration-level

```
build.gradle
configurations.all {
    transitive = false
}

dependencies {
    implementation 'com.google.guava:guava:23.0'
}
```

## §

### Importing version recommendations from a Maven BOM

Gradle provides support for importing bill of materials (BOM) files, which are effectively `.pom` files that use `<dependencyManagement>` to control the dependency versions of direct and transitive dependencies. The BOM support in Gradle works similar to using `<scope>import</scope>` when depending on a BOM in Maven. In Gradle however, it is done via a regular dependency declaration on the BOM:

#### Example 328. Depending on a BOM to import its dependency constraints

```
build.gradle
dependencies {
    // import a BOM
    implementation 'org.springframework.boot:spring-boot-dependencies:1.5.8.RELEASE'

    // define dependencies without versions
    implementation 'com.google.code.gson:gson'
    implementation 'dom4j:dom4j'
}
```

In the example, the versions of `gson` and `dom4j` are provided by the Spring Boot BOM. This way, if you are developing for a platform like Spring Boot, you do not have to declare any versions yourself but can rely on the versions the platform provides.

Gradle treats all entries in the `<dependencyManagement>` block of a BOM similar to Gradle's dependency constraints. This means that any version defined in the `<dependencyManagement>` block can impact the dependency resolution result. In order to qualify as a BOM, a `.pom` file needs to have `<packaging>pom</packaging>` set.

**Note:** Importing dependency constraints from Maven BOMs is active by default with Gradle 5.0+. For using it in Gradle 4.6+, you need to activate it by adding `enableFeaturePreview('IMPROVED_I`

in *settings.gradle*.

# Dependency Locking

Use of dynamic dependency versions (e.g. `1.+` or `[1.0, 2.0)`) makes builds non-deterministic. This causes builds to break without any obvious change, and worse, can be caused by a transitive dependency that the build author has no control over.

To achieve reproducible builds, it is necessary to *lock* versions of dependencies and transitive dependencies such that a build with the same inputs will always resolve the same module versions. This is called *dependency locking*.

It enables, amongst others, the following scenarios:

Companies dealing with multi repositories no longer need to rely on `-SNAPSHOT` or changing dependencies, which sometimes result in cascading failures when a dependency introduces a bug or incompatibility. Now dependencies can be declared against major or minor version range, enabling to test with the latest versions on CI while leveraging locking for stable developer builds.

Teams that want to always use the latest of their dependencies can use dynamic versions, locking their dependencies only for releases. The release tag will contain the lock states, allowing that build to be fully reproducible when bug fixes need to be developed.

Locking is enabled per dependency configuration. Once enabled, you must create an initial lock state. It will cause Gradle to verify that resolution results do not change, resulting in the same selected dependencies even if newer versions are produced. Modifications to your build that would impact the resolved set of dependencies will cause it to fail. This makes sure that changes, either in published dependencies or build definitions, do not alter resolution without adapting the lock state.

**Note:** Dependency locking makes sense only with dynamic versions. It will have no impact on changing versions (like `-SNAPSHOT`) whose coordinates remain the same, though the content may change. Gradle will even emit a warning when persisting lock state and changing dependencies are present in the resolution result.

## §

### Enabling locking on configurations

Locking of a configuration happens through the [ResolutionStrategy](#):

### Example 329. Locking a specific configuration

**build.gradle**

```
configurations {
    compileClasspath {
        resolutionStrategy.activateDependencyLocking()
    }
}
```

Or the following, as a way to lock all configurations:

### Example 330. Locking all configurations

**build.gradle**

```
dependencyLocking {
    lockAllConfigurations()
}
```

**Note:** Only configurations that can be resolved will have lock state attached to them. Applying locking on non resolvable-configurations is simply a no-op.

§

## Generating and updating dependency locks

In order to generate or update lock state, you specify the `--write-locks` command line argument in addition to the normal tasks that would trigger configurations to be resolved. This will cause the creation of lock state for each resolved configuration in that build execution. Note that if lock state existed previously, it is overwritten.

§

### Lock all configurations in one build execution

When locking multiple configurations, you may want to lock them all at once, during a single build execution.

For this, you have two options:

Run `gradle dependencies --write-locks`. This will effectively lock all resolvable configurations that have locking enabled. Note that in a multi project setup, `dependencies` only is executed on *one* project, the root one in this case.

Declare a custom task that will resolve all configurations

### Example 331. Resolving all configurations

#### build.gradle

```
task resolveAndLockAll {
    doFirst {
        assert gradle.startParameter.writeDependencyLocks
    }
    doLast {
        configurations.findAll {
            // Add any custom filtering on the configurations to be resolved
            it.canBeResolved
        }.each { it.resolve() }
    }
}
```

That second option, with proper choosing of configurations, can be the only option in the native world, where not all configurations can be resolved on a single platform.

## §

### Lock state location and format

Lock state will be preserved in a file located in the folder `gradle/dependency-locks` inside the project or subproject directory. Each file is named by the configuration it locks and has the `lockfile` extension.

The content of the file is a module notation per line, with a header giving some context. Module notations are ordered alphabetically, to ease diffs.

### Example 332. Lockfile content

#### gradle/dependency-locks/compileClasspath.lockfile

```
# This is a Gradle generated file for dependency locking.
# Manual edits can break the build and are not advised.
# This file is expected to be part of source control.
org.springframework:spring-beans:5.0.5.RELEASE
org.springframework:spring-core:5.0.5.RELEASE
org.springframework:spring-jcl:5.0.5.RELEASE
```

which matches the following dependency declaration:

### Example 333. Dynamic dependency declaration

#### build.gradle

```
dependencies {
    implementation 'org.springframework:spring-beans:[5.0,6.0)'
}
```



## §

### Running a build with lock state present

The moment a build needs to resolve a configuration that has locking enabled and it finds a matching lock state, it will use it to verify that the given configuration still resolves the same versions.

A successful build indicates that the same dependencies are used as stored in the lock state, regardless if new versions matching the dynamic selector have been produced.

The complete validation is as follows:

Existing entries in the lock state must be matched in the build

A version mismatch or missing resolved module causes a build failure

Resolution result must not contain extra dependencies compared to the lock state

## §

### Selectively updating lock state entries

In order to update only specific modules of a configuration, you can use the `--update-locks` command line flag. It takes a comma (,) separated list of module notations. In this mode, the existing lock state is still used as input to resolution, filtering out the modules targeted by the update.

```
gradle classes --update-locks org.apache.commons:commons-lang3,org.slf4j:slf4j-
```

Wildcards, indicated with `*`, can be used in the group or module name. They can be the only character or appear at the end of the group or module respectively. The following wildcard notation examples are valid:

`org.apache.commons:*`: will let all modules belonging to group `org.apache.commons` update

`*:guava:` will let all modules named `guava`, whatever their group, update

`org.springframework.spring*:spring*`: will let all modules having their group starting with `org.spr` and name starting with `spring` update

**Note:** The resolution may cause other module versions to update, as dictated by the Gradle resolution rules.

## §

### Disabling dependency locking

Make sure that the configuration for which you no longer want locking is not configured with locking.

Remove the file matching the configurations where you no longer want locking.

If you only perform the second step above, then locking will effectively no longer be applied. However, if that

configuration happens to be resolved in the future at a time where lock state is persisted, it will once again be locked.

§

## Locking limitations

It is currently not possible to lock the `classpath` configuration used for script plugins.

Locking can not yet be applied to source dependencies.

§

## Nebula locking plugin

This feature is inspired by the Nebula Gradle dependency lock plugin.

If you were using that plugin and want to migrate, see the Nebula documentation.

# Working with Dependencies

Gradle provides an extensive API for navigating, inspecting and post-processing metadata and artifacts of resolved dependencies.

The main entry point for this functionality is the `Configuration` API. To learn more about the fundamentals of configurations, see *Managing Dependency Configurations*.

§

## Iterating over dependencies assigned to a configuration

Sometimes you'll want to implement logic based on the dependencies declared in the build script of a project e.g. to inspect them in a Gradle plugin. You can iterate over the set of dependencies assigned to a configuration with the help of the method `Configuration.getDependencies()`. Alternatively, you can also use `Configuration.getAllDependencies()` to include the dependencies declared in superconfigurations. These APIs only return the declared dependencies and do not trigger dependency resolution. Therefore, the dependency sets do not include transitive dependencies. Calling the APIs during the configuration phase of the build lifecycle does not result in a significant performance impact.

**Example 334. Iterating over the dependencies assigned to a configuration**

**build.gradle**

```
task iterateDeclaredDependencies {
    doLast {
        DependencySet dependencySet = configurations.scm.dependencies

        dependencySet.each {
            logger.quiet "$it.group:$it.name:$it.version"
        }
    }
}
```

§

## Iterating over artifacts resolved for a module

None of the dependency reporting helps you with inspecting or further processing the underlying, resolved artifacts of a module. A typical use case for accessing the artifacts is to copy them into a specific directory or filter out files of interest based on a specific file extension.

You can iterate over the complete set of artifacts resolved for a module with the help of the method `FileCollection.GetFiles()`. Every file instance returned from the method points to its location in the dependency cache. Using this method on a `Configuration` instance is possible as the interface extends `FileCollection`.

#### Example 335. Iterating over the artifacts resolved for a module

**build.gradle**

```
task iterateResolvedArtifacts {
    dependsOn configurations.scm

    doLast {
        configurations.scm.each {
            logger.quiet it.absolutePath
        }
    }
}
```

**Note:** Iterating over the artifacts of a module automatically resolves the configuration. A resolved configuration becomes immutable and cannot add or remove dependencies. If needed you can copy a configuration for further modification via `Configuration.copy()`.

§

## Navigating the dependency graph

As a plugin developer, you may want to navigate the full graph of dependencies assigned to a configuration e.g. for turning the dependency graph into a visualization. You can access the full graph of dependencies for a configuration with the help of the `ResolutionResult`.

The resolution result provides various methods for accessing the resolved and unresolved dependencies. For demonstration purposes the sample code uses `ResolutionResult.getRoot()` to access the root node the resolved dependency graph. Each dependency of this component returns an instance of `ResolvedDependencyResult` or `UnresolvedDependencyResult` providing detailed information about the node.

### Example 336. Walking the resolved and unresolved dependencies of a configuration

#### build.gradle

```
task walkDependencyGraph(type: DependencyGraphWalk) {
    dependsOn configurations.scm
}

class DependencyGraphWalk extends DefaultTask {
    @TaskAction
    void walk() {
        Configuration configuration = project.configurations.scm
        ResolutionResult resolutionResult = configuration.incoming.resolutionResult
        ResolvedComponentResult root = resolutionResult.root
        logger.quiet configuration.name
        traverseDependencies(0, root.dependencies)
    }

    private void traverseDependencies(int level, Set<? extends DependencyResult>
        for (DependencyResult result : results) {
            if (result instanceof ResolvedDependencyResult) {
                ResolvedComponentResult componentResult = result.selected
                ComponentIdentifier componentIdentifier = componentResult.id
                String node = calculateIndentation(level) + "- $componentIdentifier"
                logger.quiet node
                traverseDependencies(level + 1, componentResult.dependencies)
            } else if (result instanceof UnresolvedDependencyResult) {
                ComponentSelector componentSelector = result.attempted
                String node = calculateIndentation(level) + "- $componentSelector"
                logger.quiet node
            }
        }
    }

    private String calculateIndentation(int level) {
        '    ' * level
    }
}
```

## §

### Accessing a module's metadata file

As part of the dependency resolution process, Gradle downloads the metadata file of a module and stores it in the dependency cache. Some organizations enforce strong restrictions on accessing repositories outside of internal network. Instead of downloading artifacts, those organizations prefer to provide an "installable" Gradle cache with all artifacts contained in it to fulfill the build's dependency requirements.

The artifact query API provides access to the raw files of a module. Currently, it allows getting a handle to

the metadata file and some selected, additional artifacts (e.g. a JVM-based module's source and Javadoc files). The main API entry point is [ArtifactResolutionQuery](#).

Let's say you wanted to post-process the metadata file of a Maven module. The group, name and version of the module component serve as input to the artifact resolution query. After executing the query, you get a handle to all components that match the criteria and their underlying files. Additionally, it's very easy to post-process the metadata file. The example code uses Groovy's `XmlSlurper` to ask for POM element values.

### Example 337. Accessing a Maven module's metadata artifact

#### **build.gradle**

```
apply plugin: 'java-library'

repositories {
    mavenCentral()
}

dependencies {
    implementation 'com.google.guava:guava:18.0'
}

task printGuavaMetadata {
    dependsOn configurations.compileClasspath

    doLast {
        ArtifactResolutionQuery query = dependencies.createArtifactResolutionQuery()
            .forModule('com.google.guava', 'guava', '18.0')
            .withArtifacts(MavenModule, MavenPomArtifact)
        ArtifactResolutionResult result = query.execute()

        for(component in result.resolvedComponents) {
            Set<ArtifactResult> mavenPomArtifacts = component.getArtifacts(MavenPomArtifact)
            ArtifactResult guavaPomArtifact = mavenPomArtifacts.find { it.file.name.endsWith('pom.xml') }
            def xml = new XmlSlurper().parse(guavaPomArtifact.file)
            println guavaPomArtifact.file
            println xml.name
            println xml.description
        }
    }
}
```

# Customizing Dependency Resolution Behavior

There are a number of ways that you can influence how Gradle resolves dependencies. All of these mechanisms offer an API to define a reason for why they are used. Providing reasons makes dependency resolution results more understandable. If any customization influenced the resolution result, the provided reason will show up in dependency insight report.

§

## Using dependency resolve rules

A dependency resolve rule is executed for each resolved dependency, and offers a powerful api for manipulating a requested dependency prior to that dependency being resolved. The feature currently offers the ability to change the group, name and/or version of a requested dependency, allowing a dependency to be substituted with a completely different module during resolution.

Dependency resolve rules provide a very powerful way to control the dependency resolution process, and can be used to implement all sorts of advanced patterns in dependency management. Some of these patterns are outlined below. For more information and code samples see the [ResolutionStrategy](#) class in the API documentation.

§

## Modelling releasable units

Often an organisation publishes a set of libraries with a single version; where the libraries are built, tested and published together. These libraries form a "releasable unit", designed and intended to be used as a whole. It does not make sense to use libraries from different releasable units together.

But it is easy for transitive dependency resolution to violate this contract. For example:

```
module-a depends on releasable-unit:part-one:1.0
```

```
module-b depends on releasable-unit:part-two:1.1
```

A build depending on both `module-a` and `module-b` will obtain different versions of libraries within the releasable unit.

Dependency resolve rules give you the power to enforce releasable units in your build. Imagine a releasable

unit defined by all libraries that have `org.gradle` group. We can force all of these libraries to use a consistent version:

### Example 338. Forcing a consistent version for a group of libraries

#### **build.gradle**

```
configurations.all {
    resolutionStrategy.eachDependency { DependencyResolveDetails details ->
        if (details.requested.group == 'org.gradle') {
            details.useVersion '1.4'
            details.because 'API breakage in higher versions'
        }
    }
}
```

§

### Implementing a custom versioning scheme

In some corporate environments, the list of module versions that can be declared in Gradle builds is maintained and audited externally. Dependency resolve rules provide a neat implementation of this pattern:

In the build script, the developer declares dependencies with the module group and name, but uses a placeholder version, for example: `default`.

The `default` version is resolved to a specific version via a dependency resolve rule, which looks up the version in a corporate catalog of approved modules.

This rule implementation can be neatly encapsulated in a corporate plugin, and shared across all builds within the organisation.

### Example 339. Using a custom versioning scheme

#### **build.gradle**

```
configurations.all {
    resolutionStrategy.eachDependency { DependencyResolveDetails details ->
        if (details.requested.version == 'default') {
            def version = findDefaultVersionInCatalog(details.requested.group, details.requested.name)
            details.useVersion version.version
            details.because version.because
        }
    }
}

def findDefaultVersionInCatalog(String group, String name) {
    //some custom logic that resolves the default version into a specific version
    [version: "1.0", because: 'tested by QA']
}
```



§

## Blacklisting a particular version with a replacement

Dependency resolve rules provide a mechanism for blacklisting a particular version of a dependency and providing a replacement version. This can be useful if a certain dependency version is broken and should not be used, where a dependency resolve rule causes this version to be replaced with a known good version. One example of a broken module is one that declares a dependency on a library that cannot be found in any of the public repositories, but there are many other reasons why a particular module version is unwanted and a different version is preferred.

In example below, imagine that version `1.2.1` contains important fixes and should always be used in preference to `1.2`. The rule provided will enforce just this: any time version `1.2` is encountered it will be replaced with `1.2.1`. Note that this is different from a forced version as described above, in that any other versions of this module would not be affected. This means that the 'newest' conflict resolution strategy would still select version `1.3` if this version was also pulled transitively.

### Example 340. Blacklisting a version with a replacement

#### **build.gradle**

```
configurations.all {
    resolutionStrategy.eachDependency { DependencyResolveDetails details ->
        if (details.requested.group == 'org.springframework' && details.requested.name == 'spring-core' && details.requested.version == '4.3.0') {
            details.useVersion '4.3.1'
            details.because 'fixes critical bug in 4.3.0'
        }
    }
}
```

§

## Substituting a dependency module with a compatible replacement

At times a completely different module can serve as a replacement for a requested module dependency. Examples include using `groovy` in place of `groovy-all`, or using `log4j-over-slf4j` instead of `log4j`. You can perform these substitutions using dependency resolve rules:

### Example 341. Changing dependency group and/or name during resolution

#### build.gradle

```
configurations.all {
    resolutionStrategy.eachDependency { DependencyResolveDetails details ->
        if (details.requested.name == 'groovy-all') {
            details.useTarget group: details.requested.group, name: 'groovy', version: details.requested.version
            details.because "prefer 'groovy' over 'groovy-all'"
        }
        if (details.requested.name == 'log4j') {
            details.useTarget "org.slf4j:log4j-over-slf4j:1.7.10"
            details.because "prefer 'log4j-over-slf4j' 1.7.10 over any version of log4j"
        }
    }
}
```

## §

### Using dependency substitution rules

Dependency substitution rules work similarly to dependency resolve rules. In fact, many capabilities of dependency resolve rules can be implemented with dependency substitution rules. They allow project and module dependencies to be transparently substituted with specified replacements. Unlike dependency resolve rules, dependency substitution rules allow project and module dependencies to be substituted interchangeably.

*Adding a dependency substitution rule to a configuration changes the timing of when that configuration is resolved.* Instead of being resolved on first use, the configuration is instead resolved when the task graph is being constructed. This can have unexpected consequences if the configuration is being further modified during task execution, or if the configuration relies on modules that are published during execution of another task.

To explain:

A `Configuration` can be declared as an input to any Task, and that configuration can include project dependencies when it is resolved.

If a project dependency is an input to a Task (via a configuration), then tasks to build the project artifacts must be added to the task dependencies.

In order to determine the project dependencies that are inputs to a task, Gradle needs to resolve the `Configuration` inputs.

Because the Gradle task graph is fixed once task execution has commenced, Gradle needs to perform this resolution prior to executing any tasks.

In the absence of dependency substitution rules, Gradle knows that an external module dependency will

never transitively reference a project dependency. This makes it easy to determine the full set of project dependencies for a configuration through simple graph traversal. With this functionality, Gradle can no longer make this assumption, and must perform a full resolve in order to determine the project dependencies.

§

### Substituting an external module dependency with a project dependency

One use case for dependency substitution is to use a locally developed version of a module in place of one that is downloaded from an external repository. This could be useful for testing a local, patched version of a dependency.

The module to be replaced can be declared with or without a version specified.

#### Example 342. Substituting a module with a project

**build.gradle**

```
configurations.all {
    resolutionStrategy.dependencySubstitution {
        substitute module("org.utils:api") with project(":api") because "we work"
        substitute module("org.utils:util:2.5") with project(":util")
    }
}
```

Note that a project that is substituted must be included in the multi-project build (via `settings.gradle`). Dependency substitution rules take care of replacing the module dependency with the project dependency and wiring up any task dependencies, but do not implicitly include the project in the build.

§

### Substituting a project dependency with a module replacement

Another way to use substitution rules is to replace a project dependency with a module in a multi-project build. This can be useful to speed up development with a large multi-project build, by allowing a subset of the project dependencies to be downloaded from a repository rather than being built.

The module to be used as a replacement must be declared with a version specified.

#### Example 343. Substituting a project with a module

**build.gradle**

```
configurations.all {
    resolutionStrategy.dependencySubstitution {
        substitute project(":api") with module("org.utils:api:1.3") because "we"
    }
}
```

When a project dependency has been replaced with a module dependency, that project is still included in the overall multi-project build. However, tasks to build the replaced dependency will not be executed in order to

build the resolve the depending `Configuration`.

§

## Conditionally substituting a dependency

A common use case for dependency substitution is to allow more flexible assembly of sub-projects within a multi-project build. This can be useful for developing a local, patched version of an external dependency or for building a subset of the modules within a large multi-project build.

The following example uses a dependency substitution rule to replace any module dependency with the group `org.example`, but only if a local project matching the dependency name can be located.

### Example 344. Conditionally substituting a dependency

**build.gradle**

```
configurations.all {
    resolutionStrategy.dependencySubstitution.all { DependencySubstitution dependency
        if (dependency.requested instanceof ModuleComponentSelector && dependency
            def targetProject = findProject(":${dependency.requested.module}")
            if (targetProject != null) {
                dependency.useTarget targetProject
            }
        }
    }
}
```

Note that a project that is substituted must be included in the multi-project build (via `settings.gradle`). Dependency substitution rules take care of replacing the module dependency with the project dependency, but do not implicitly include the project in the build

§

## Using component metadata rules

Each module has metadata associated with it, such as its group, name, version, dependencies, and so on. This metadata typically originates in the module's descriptor. Metadata rules allow certain parts of a module's metadata to be manipulated from within the build script. They take effect after a module's descriptor has been downloaded, but before it has been selected among all candidate versions. This makes metadata rules another instrument for customizing dependency resolution.

One piece of module metadata that Gradle understands is a module's *status scheme*. This concept, also known from Ivy, models the different levels of maturity that a module transitions through over time. The default status scheme, ordered from least to most mature status, is `integration`, `milestone`, `release`. Apart from a status scheme, a module also has a (current) *status*, which must be one of the values in its status scheme. If not specified in the (Ivy) descriptor, the status defaults to `integration` for Ivy modules and Maven snapshot modules, and `release` for Maven modules that aren't snapshots.

A module's status and status scheme are taken into consideration when a `latest` version selector is

resolved. Specifically, `latest.someStatus` will resolve to the highest module version that has status `some` or a more mature status. For example, with the default status scheme in place, `latest.integration` will select the highest module version regardless of its status (because `integration` is the least mature status), whereas `latest.release` will select the highest module version with status `release`. Here is what this looks like in code:

#### Example 345. 'Latest' version selector

##### **build.gradle**

```
dependencies {
    config1 "org.sample:client:latest.integration"
    config2 "org.sample:client:latest.release"
}

task listConfigs {
    doLast {
        configurations.config1.each { println it.name }
        println()
        configurations.config2.each { println it.name }
    }
}
```

##### Output of **gradle -q listConfigs**

```
> gradle -q listConfigs
client-1.5.jar

client-1.4.jar
```

The next example demonstrates `latest` selectors based on a custom status scheme declared in a component metadata rule that applies to all modules:

### Example 346. Custom status scheme

#### build.gradle

```
class CustomStatusRule implements ComponentMetadataRule {
    @Override
    void execute(ComponentMetadataContext context) {
        def details = context.details
        if (details.id.group == "org.sample" && details.id.name == "api") {
            details.statusScheme = ["bronze", "silver", "gold", "platinum"]
        }
    }
}

dependencies {
    config3 "org.sample:api:latest.silver"
    components {
        all(CustomStatusRule)
    }
}
```

Component metadata rules can be applied to a specified module. Modules must be specified in the form of `g:group:artifact:version`.

### Example 347. Custom status scheme by module

#### build.gradle

```
class ModuleStatusRule implements ComponentMetadataRule {
    @Override
    void execute(ComponentMetadataContext context) {
        context.details.statusScheme = ["int", "rc", "prod"]
    }
}

dependencies {
    config4 "org.sample:lib:latest.prod"
    components {
        withModule('org.sample:lib', ModuleStatusRule)
    }
}
```

Gradle can also provide to component metadata rules the Ivy-specific metadata for modules resolved from an Ivy repository. Values from the Ivy descriptor are made available via the [IvyModuleDescriptor](#) interface.

### Example 348. Ivy component metadata rule

**build.gradle**

```
class IvyComponentRule implements ComponentMetadataRule {
    @Override
    void execute(ComponentMetadataContext context) {
        def descriptor = context.getDescriptor(IvyModuleDescriptor)
        if (descriptor != null && descriptor.branch == 'testing') {
            context.details.status = "rc"
        }
    }
}

dependencies {
    config5 "org.sample:lib:latest.rc"
    components {
        withModule("org.sample:lib", IvyComponentRule)
    }
}
```

Note that while any rule can request the [IvyModuleDescriptor](#), only components sourced from an Ivy repository will have a non-null value for it.

As can be seen in the examples above, component metadata rules are defined by implementing [ComponentMetadataRule](#) which has a single `execute` method receiving an instance of [ComponentMetadataContext](#) as parameter.

The next example shows how you can configure the [ComponentMetadataRule](#) through an [ActionConfiguration](#).

### Example 349. Configuration of ComponentMetadataRule

**build.gradle**

```
class ConfiguredRule implements ComponentMetadataRule {
    String param

    @javax.inject.Inject
    ConfiguredRule(String param) {
        this.param = param
    }

    @Override
    void execute(ComponentMetadataContext context) {
        if (param == 'sampleValue') {
            context.details.statusScheme = ["bronze", "silver", "gold", "platinum"]
        }
    }
}

dependencies {
    config6 "org.sample:api:latest.gold"
    components {
        withModule('org.sample:api', ConfiguredRule, {
            params('sampleValue')
        })
    }
}
```

This happens by having a constructor in your implementation of `ComponentMetadataRule` accepting the parameters that were configured and the services that need injecting.

Gradle enforces isolation of instances of `ComponentMetadataRule`. This means that all passed in parameters must be `Serializable` or known Gradle types that can be isolated.

In addition, Gradle services can be injected into your `ComponentMetadataRule`. This is for the moment limited to the `RepositoryResourceAccessor`. Because of this, the moment you have a constructor, it must be annotated with `@javax.inject.Inject`.

§

## Using component selection rules

Component selection rules may influence which component instance should be selected when multiple versions are available that match a version selector. Rules are applied against every available version and allow the version to be explicitly rejected by rule. This allows Gradle to ignore any component instance that does not satisfy conditions set by the rule. Examples include:

For a dynamic version like `1.+` certain versions may be explicitly rejected from selection.



For a static version like 1.4 an instance may be rejected based on extra component metadata such as the Ivy branch attribute, allowing an instance from a subsequent repository to be used.

Rules are configured via the `ComponentSelectionRules` object. Each rule configured will be called with a `ComponentSelection` object as an argument which contains information about the candidate version being considered. Calling `ComponentSelection.reject(java.lang.String)` causes the given candidate version to be explicitly rejected, in which case the candidate will not be considered for the selector.

The following example shows a rule that disallows a particular version of a module but allows the dynamic version to choose the next best candidate.

#### Example 350. Component selection rule

##### build.gradle

```
configurations {
    rejectConfig {
        resolutionStrategy {
            componentSelection {
                // Accept the highest version matching the requested version that
                all { ComponentSelection selection ->
                    if (selection.candidate.group == 'org.sample' && selection.candidate.version == '1.5')
                        selection.reject("version 1.5 is broken for 'org.sample:api:1.+'")
                }
            }
        }
    }
}

dependencies {
    rejectConfig "org.sample:api:1.+"
}
```

Note that version selection is applied starting with the highest version first. The version selected will be the first version found that all component selection rules accept. A version is considered accepted if no rule explicitly rejects it.

Similarly, rules can be targeted at specific modules. Modules must be specified in the form of `group:module`.

### Example 351. Component selection rule with module target

#### build.gradle

```
configurations {
    targetConfig {
        resolutionStrategy {
            componentSelection {
                withModule("org.sample:api") { ComponentSelection selection ->
                    if (selection.candidate.version == "1.5") {
                        selection.reject("version 1.5 is broken for 'org.sample:api'")
                    }
                }
            }
        }
    }
}
```

Component selection rules can also consider component metadata when selecting a version. Possible metadata arguments that can be considered are [ComponentMetadata](#) and [IvyModuleDescriptor](#).

### Example 352. Component selection rule with metadata

#### build.gradle

```
configurations {
    metadataRulesConfig {
        resolutionStrategy {
            componentSelection {
                // Reject any versions with a status of 'experimental'
                all { ComponentSelection selection, ComponentMetadata metadata ->
                    if (selection.candidate.group == 'org.sample' && metadata.status == 'experimental') {
                        selection.reject("don't use experimental candidates from 'org.sample'")
                    }
                }
                // Accept the highest version with either a "release" branch or a "testing" branch
                withModule('org.sample:api') { ComponentSelection selection, IvyModuleDescriptor descriptor ->
                    if (descriptor.branch != "release" && metadata.status != 'milestone') {
                        selection.reject("'org.sample:api' must have testing branch")
                    }
                }
            }
        }
    }
}
```

Note that a [ComponentSelection](#) argument is *always* required as the first parameter when declaring a component selection rule with additional Ivy metadata parameters, but the metadata parameters can be declared in any order.

Lastly, component selection rules can also be defined using a *rule source* object. A rule source object is any

object that contains exactly one method that defines the rule action and is annotated with `@Mutate`.

This method:

must return `void`.

must have `ComponentSelection` as the first argument.

may have additional parameters of type `ComponentMetadata` and/or `IvyModuleDescriptor`.

### Example 353. Component selection rule using a rule source object

**build.gradle**

```
class RejectTestBranch {
    @Mutate
    void evaluateRule(ComponentSelection selection, IvyModuleDescriptor ivy) {
        if (ivy.branch == "test") {
            selection.reject("reject test branch")
        }
    }
}

configurations {
    ruleSourceConfig {
        resolutionStrategy {
            componentSelection {
                all new RejectTestBranch()
            }
        }
    }
}
```

§

## Using module replacement rules

Module replacement rules allow a build to declare that a legacy library has been replaced by a new one. A good example when a new library replaced a legacy one is the `google-collections` -> `guava` migration. The team that created `google-collections` decided to change the module name from `com.google.collect` into `com.google.guava:guava`. This is a legal scenario in the industry: teams need to be able to change the names of products they maintain, including the module coordinates. Renaming of the module coordinates has impact on conflict resolution.

To explain the impact on conflict resolution, let's consider the `google-collections` -> `guava` scenario. It may happen that both libraries are pulled into the same dependency graph. For example, *our project* depends on `guava` but some of *our dependencies* pull in a legacy version of `google-collections`. This can cause runtime errors, for example during test or application execution. Gradle does not automatically resolve the `google-collections` -> `guava` conflict because it is not considered as a *version conflict*. It's

because the module coordinates for both libraries are completely different and conflict resolution is activated when `group` and `module` coordinates are the same but there are different versions available in the dependency graph (for more info, refer to the section on conflict resolution). Traditional remedies to this problem are:

Declare exclusion rule to avoid pulling in `google-collections` to graph. It is probably the most popular approach.

Avoid dependencies that pull in legacy libraries.

Upgrade the dependency version if the new version no longer pulls in a legacy library.

Downgrade to `google-collections`. It's not recommended, just mentioned for completeness.

Traditional approaches work but they are not general enough. For example, an organisation wants to resolve the `google-collections` -> `guava` conflict resolution problem in all projects. Starting from Gradle 2.2 it is possible to declare that certain module was replaced by other. This enables organisations to include the information about module replacement in the corporate plugin suite and resolve the problem holistically for all Gradle-powered projects in the enterprise.

#### Example 354. Declaring a module replacement

**build.gradle**

```
dependencies {
    modules {
        module("com.google.collections:google-collections") {
            replacedBy("com.google.guava:guava", "google-collections is now part
        }
    }
}
```

For more examples and detailed API, refer to the DSL reference for [ComponentMetadataHandler](#).

What happens when we declare that `google-collections` is replaced by `guava`? Gradle can use this information for conflict resolution. Gradle will consider every version of `guava` newer/better than any version of `google-collections`. Also, Gradle will ensure that only `guava` jar is present in the classpath / resolved file list. Note that if only `google-collections` appears in the dependency graph (e.g. no `guava`) Gradle will not eagerly replace it with `guava`. Module replacement is an information that Gradle uses for resolving conflicts. If there is no conflict (e.g. only `google-collections` or only `guava` in the graph) the replacement information is not used.

Currently it is not possible to declare that a given module is replaced by a set of modules. However, it is possible to declare that multiple modules are replaced by a single module.

§

## Specifying default dependencies for a configuration

A configuration can be configured with default dependencies to be used if no dependencies are explicitly set for the configuration. A primary use case of this functionality is for developing plugins that make use of versioned tools that the user might override. By specifying default dependencies, the plugin can use a default version of the tool only if the user has not specified a particular version to use.

### Example 355. Specifying default dependencies on a configuration

**build.gradle**

```
configurations {
    pluginTool {
        defaultDependencies { dependencies ->
            dependencies.add(project.dependencies.create("org.gradle:my-util:1.0
        }
    }
}
```

§

## Enabling Ivy dynamic resolve mode

Gradle's Ivy repository implementations support the equivalent to Ivy's dynamic resolve mode. Normally, Gradle will use the `rev` attribute for each dependency definition included in an `ivy.xml` file. In dynamic resolve mode, Gradle will instead prefer the `revConstraint` attribute over the `rev` attribute for a given dependency definition. If the `revConstraint` attribute is not present, the `rev` attribute is used instead.

To enable dynamic resolve mode, you need to set the appropriate option on the repository definition. A couple of examples are shown below. Note that dynamic resolve mode is only available for Gradle's Ivy repositories. It is not available for Maven repositories, or custom Ivy `DependencyResolver` implementations.

### Example 356. Enabling dynamic resolve mode

#### **build.gradle**

```
// Can enable dynamic resolve mode when you define the repository
repositories {
    ivy {
        url "http://repo.mycompany.com/repo"
        resolve.dynamicMode = true
    }
}

// Can use a rule instead to enable (or disable) dynamic resolve mode for all repositories
repositories.withType(IvyArtifactRepository) {
    resolve.dynamicMode = true
}
```

# Troubleshooting Dependency Resolution

Managing dependencies in a project can be challenging. This chapter describes techniques for troubleshooting issues you might encounter in your project as well as best practices for avoiding common problems.

## §

### Resolving version conflicts

Gradle resolves version conflicts by picking the highest version of a module. Build scans and the dependency insight report are immensely helpful in identifying why a specific version was selected. If the resolution result is not satisfying (e.g. the selected version of a module is too high) or it fails (because you configured `ResolutionStrategy.failOnVersionConflict()`) you have the following possibilities to fix it.

Configuring any dependency (transitive or not) as *forced*. This approach is useful if the dependency in conflict is a transitive dependency. See the section called “Enforcing a particular dependency version” for examples.

Configuring dependency resolution to *prefer modules that are part of your build* (transitive or not). This approach is useful if your build contains custom forks of modules (as part of multi-project builds or as include in composite builds). See `ResolutionStrategy.preferProjectModules()` for more information.

Using dependency resolve rules for fine-grained control over the version selected for a particular dependency.

## §

### Using dynamic versions and changing modules

There are many situations when you want to use the latest version of a particular module dependency, or the latest in a range of versions. This can be a requirement during development, or you may be developing a library that is designed to work with a range of dependency versions. You can easily depend on these constantly changing dependencies by using a *dynamic version*. A dynamic version can be either a version range (e.g. `2.+`) or it can be a placeholder for the latest version available e.g. `latest.integration`.

Alternatively, the module you request can change over time even for the same version, a so-called changing version. An example of this type of *changing module* is a Maven `SNAPSHOT` module, which always points at the latest artifact published. In other words, a standard Maven snapshot is a module that is continually

evolving, it is a "changing module".

**Note:** Using dynamic versions and changing modules can lead to unreproducible builds. As new versions of a particular module are published, its API may become incompatible with your source code. Use this feature with caution!

By default, Gradle caches dynamic versions and changing modules for 24 hours. During that time frame Gradle does not contact any of the declared, remote repositories for new versions. If you want Gradle to check the remote repository more frequently or with every execution of your build, then you will need to change the time to live (TTL) threshold.

**Note:** Using a short TTL threshold for dynamic or changing versions may result in longer build times due to the increased number of HTTP(s) calls.

You can override the default cache modes using command line options. You can also change the cache expiry times in your build programmatically using the resolution strategy.

§

## Controlling dependency caching programmatically

You can fine-tune certain aspects of caching programmatically using the [ResolutionStrategy](#) for a configuration. The programmatic approach is useful if you would like to change the settings permanently.

By default, Gradle caches dynamic versions for 24 hours. To change how long Gradle will cache the resolved version for a dynamic version, use:

### Example 357. Dynamic version cache control

**build.gradle**

```
configurations.all {  
    resolutionStrategy.cacheDynamicVersionsFor 10, 'minutes'  
}
```

By default, Gradle caches changing modules for 24 hours. To change how long Gradle will cache the meta-data and artifacts for a changing module, use:

### Example 358. Changing module cache control

**build.gradle**

```
configurations.all {  
    resolutionStrategy.cacheChangingModulesFor 4, 'hours'  
}
```



§

## Controlling dependency caching from the command line

You can control the behavior of dependency caching for a distinct build invocation from the command line. Command line options are helpful for making a selective, ad-hoc choice for a single execution of the build.

§

### Avoiding network access with offline mode

The `--offline` command line switch tells Gradle to always use dependency modules from the cache, regardless if they are due to be checked again. When running with offline, Gradle will never attempt to access the network to perform dependency resolution. If required modules are not present in the dependency cache, build execution will fail.

§

### Forcing all dependencies to be re-resolved

At times, the Gradle Dependency Cache can become out of sync with the actual state of the configured repositories. Perhaps a repository was initially misconfigured, or perhaps a "non-changing" module was published incorrectly. To refresh all dependencies in the dependency cache, use the `--refresh-dependencies` option on the command line.

The `--refresh-dependencies` option tells Gradle to ignore all cached entries for resolved modules and artifacts. A fresh resolve will be performed against all configured repositories, with dynamic versions recalculated, modules refreshed, and artifacts downloaded. However, where possible Gradle will check if the previously downloaded artifacts are valid before downloading again. This is done by comparing published SHA1 values in the repository with the SHA1 values for existing downloaded artifacts.

§

## Locking dependency versions

The use of dynamic dependencies in a build is convenient. The user does not need to know the latest version of a dependency and Gradle automatically uses new versions once they are published. However, dynamic dependencies make builds non-reproducible, as they can resolve to a different version at a later point in time. This makes it hard to reproduce old builds when debugging a problem. It can also disrupt development if a new, but incompatible version is selected. In the best case the CI build catches the problem and someone needs to investigate. In the worst case, the problem makes it to production unnoticed.

Gradle offers dependency locking to solve this problem. The user can run a build asking to persist the resolved versions for every module dependency. This file is then checked in and the versions in it are used on all subsequent runs until the lock is updated or removed again.

## §

### Versioning of file dependencies

Legacy projects sometimes prefer to consume file dependencies instead of module dependencies. File dependencies can point to any file in the filesystem and do not need to adhere a specific naming convention. It is recommended to clearly express the intention and a concrete version for file dependencies. File dependencies are not considered by Gradle's version conflict resolution. Therefore, it is extremely important to assign a version to the file name to indicate the distinct set of changes shipped with it. For example `commo` lets you track the changes of the library by the release notes.

As a result, the dependencies of the project are easier to maintain and organize. It's much easier to uncover potential API incompatibilities by the assigned version.

# Extending the build

# Writing Custom Task Classes

Gradle supports two types of task. One such type is the simple task, where you define the task with an action closure. We have seen these in *Build Script Basics*. For this type of task, the action closure determines the behaviour of the task. This type of task is good for implementing one-off tasks in your build script.

The other type of task is the enhanced task, where the behaviour is built into the task, and the task provides some properties which you can use to configure the behaviour. We have seen these in *Authoring Tasks*. Most Gradle plugins use enhanced tasks. With enhanced tasks, you don't need to implement the task behaviour as you do with simple tasks. You simply declare the task and configure the task using its properties. In this way, enhanced tasks let you reuse a piece of behaviour in many different places, possibly across different builds.

The behaviour and properties of an enhanced task is defined by the task's class. When you declare an enhanced task, you specify the type, or class of the task.

Implementing your own custom task class in Gradle is easy. You can implement a custom task class in pretty much any language you like, provided it ends up compiled to bytecode. In our examples, we are going to use Groovy as the implementation language. Groovy, Java or Kotlin are all good choices as the language to use to implement a task class, as the Gradle API has been designed to work well with these languages. In general, a task implemented using Java or Kotlin, which are statically typed, will perform better than the same task implemented using Groovy.

## §

### Packaging a task class

There are several places where you can put the source for the task class.

#### **Build script**

You can include the task class directly in the build script. This has the benefit that the task class is automatically compiled and included in the classpath of the build script without you having to do anything. However, the task class is not visible outside the build script, and so you cannot reuse the task class outside the build script it is defined in.

#### **buildSrc project**

You can put the source for the task class in the `rootProjectDir/buildSrc/src/main/groovy` directory. Gradle will take care of compiling and testing the task class and making it available on the classpath of the build script. The task class is visible to every build script used by the build. However, it is

not visible outside the build, and so you cannot reuse the task class outside the build it is defined in. Using the `buildSrc` project approach separates the task declaration - that is, what the task should do - from the task implementation - that is, how the task does it.

See *Organizing Gradle Projects* for more details about the `buildSrc` project.

## Standalone project

You can create a separate project for your task class. This project produces and publishes a JAR which you can then use in multiple builds and share with others. Generally, this JAR might include some custom plugins, or bundle several related task classes into a single library. Or some combination of the two.

In our examples, we will start with the task class in the build script, to keep things simple. Then we will look at creating a standalone project.

## §

## Writing a simple task class

To implement a custom task class, you extend `DefaultTask`.

### Example 359. Defining a custom task

**build.gradle**

```
class GreetingTask extends DefaultTask {  
}
```

This task doesn't do anything useful, so let's add some behaviour. To do so, we add a method to the task and mark it with the `TaskAction` annotation. Gradle will call the method when the task executes. You don't have to use a method to define the behaviour for the task. You could, for instance, call `doFirst()` or `doLast` with a closure in the task constructor to add behaviour.

### Example 360. A hello world task

**build.gradle**

```
class GreetingTask extends DefaultTask {  
    @TaskAction  
    def greet() {  
        println 'hello from GreetingTask'  
    }  
}  
  
// Create a task using the task type  
task hello(type: GreetingTask)
```

### Output of `gradle -q hello`

```
> gradle -q hello  
hello from GreetingTask
```

Let's add a property to the task, so we can customize it. Tasks are simply POGOs, and when you declare a task, you can set the properties or call methods on the task object. Here we add a `greeting` property, and set the value when we declare the `greeting` task.

### Example 361. A customizable hello world task

#### build.gradle

```
class GreetingTask extends DefaultTask {
    String greeting = 'hello from GreetingTask'

    @TaskAction
    def greet() {
        println greeting
    }
}

// Use the default greeting
task hello(type: GreetingTask)

// Customize the greeting
task greeting(type: GreetingTask) {
    greeting = 'greetings from GreetingTask'
}
```

#### Output of `gradle -q hello greeting`

```
> gradle -q hello greeting
hello from GreetingTask
greetings from GreetingTask
```

§

## A standalone project

Now we will move our task to a standalone project, so we can publish it and share it with others. This project is simply a Groovy project that produces a JAR containing the task class. Here is a simple build script for the project. It applies the Groovy plugin, and adds the Gradle API as a compile-time dependency.

### Example 362. A build for a custom task

#### build.gradle

```
apply plugin: 'groovy'

dependencies {
    compile gradleApi()
    compile localGroovy()
}
```

**Note:** The code for this example can be found at `samples/customPlugin/plugin` in the ‘-all’ distribution of Gradle.

We just follow the convention for where the source for the task class should go.

#### Example 363. A custom task

```
src/main/groovy/org/gradle/GreetingTask.groovy
package org.gradle

import org.gradle.api.DefaultTask
import org.gradle.api.tasks.TaskAction

class GreetingTask extends DefaultTask {
    String greeting = 'hello from GreetingTask'

    @TaskAction
    def greet() {
        println greeting
    }
}
```

§

#### Using your task class in another project

To use a task class in a build script, you need to add the class to the build script's classpath. To do this, you use a `buildscript { }` block, as described in the section called “External dependencies for the build script”. The following example shows how you might do this when the JAR containing the task class has been published to a local repository:

#### Example 364. Using a custom task in another project

```
build.gradle
buildscript {
    repositories {
        maven {
            url uri('../repo')
        }
    }
    dependencies {
        classpath group: 'org.gradle', name: 'customPlugin',
            version: '1.0-SNAPSHOT'
    }
}

task greeting(type: org.gradle.GreetingTask) {
    greeting = 'howdy!'
}
```

§

## Writing tests for your task class

You can use the `ProjectBuilder` class to create `Project` instances to use when you test your task class.

### Example 365. Testing a custom task

```
src/test/groovy/org/gradle/GreetingTaskTest.groovy
class GreetingTaskTest {
    @Test
    public void canAddTaskToProject() {
        Project project = ProjectBuilder.builder().build()
        def task = project.task('greeting', type: GreetingTask)
        assertTrue(task instanceof GreetingTask)
    }
}
```

§

## Incremental tasks

**Note:** Incremental tasks are an incubating feature.

Since the introduction of the implementation described above (early in the Gradle 1.6 release cycle), discussions within the Gradle community have produced superior ideas for exposing the information about changes to task implementors to what is described below. As such, the API for this feature will almost certainly change in upcoming releases. However, please do experiment with the current implementation and share your experiences with the Gradle community.

The feature incubation process, which is part of the Gradle feature lifecycle (see Appendix C), exists for this purpose of ensuring high quality final implementations through incorporation of early user feedback.

With Gradle, it's very simple to implement a task that is skipped when all of its inputs and outputs are up to date (see the section called "Up-to-date checks (AKA Incremental Build)"). However, there are times when only a few input files have changed since the last execution, and you'd like to avoid reprocessing all of the unchanged inputs. This can be particularly useful for a transformer task, that converts input files to output files on a 1:1 basis.

If you'd like to optimise your build so that only out-of-date inputs are processed, you can do so with an *incremental task*.



§

## Implementing an incremental task

For a task to process inputs incrementally, that task must contain an *incremental task action*. This is a task action method that contains a single `IncrementalTaskInputs` parameter, which indicates to Gradle that the action will process the changed inputs only.

The incremental task action may supply an `IncrementalTaskInputs.outOfDate(org.gradle.api.Action)` action for processing any input file that is out-of-date, and a `IncrementalTaskInputs.removed(org.gradle.api.Action)` action that executes for any input file that has been removed since the previous execution.

### Example 366. Defining an incremental task action

**build.gradle**

```
class IncrementalReverseTask extends DefaultTask {
    @InputDirectory
    def File inputDir

    @OutputDirectory
    def File outputDir

    @Input
    def inputProperty

    @TaskAction
    void execute(IncrementalTaskInputs inputs) {
        println inputs.incremental ? 'CHANGED inputs considered out of date'
                                   : 'ALL inputs considered out of date'

        if (!inputs.incremental)
            project.delete(outputDir.listFiles())

        inputs.outOfDate { change ->
            println "out of date: ${change.file.name}"
            def targetFile = new File(outputDir, change.file.name)
            targetFile.text = change.file.text.reverse()
        }

        inputs.removed { change ->
            println "removed: ${change.file.name}"
            def targetFile = new File(outputDir, change.file.name)
            targetFile.delete()
        }
    }
}
```

**Note:** The code for this example can be found at `samples/userguide/tasks/incrementalTask` in the ‘-all’ distribution of Gradle.

If for some reason the task is not run incremental, e.g. by running with `--rerun-tasks`, only the `outOfDate` action is executed, even if there were deleted input files. You should consider handling this case at the beginning, as is done in the example above.

For a simple transformer task like this, the task action simply needs to generate output files for any out-of-date inputs, and delete output files for any removed inputs.

A task may only contain a single incremental task action.

§

Which inputs are considered out of date?

When Gradle has history of a previous task execution, and the only changes to the task execution context since that execution are to input files, then Gradle is able to determine which input files need to be reprocessed by the task. In this case, the `IncrementalTaskInputs.outOfDate(org.gradle.api.Action)` action will be executed for any input file that was *added* or *modified*, and the `IncrementalTaskInputs.removed(org.gradle.api.Action)` action will be executed for any *removed* input file.

However, there are many cases where Gradle is unable to determine which input files need to be reprocessed. Examples include:

There is no history available from a previous execution.

You are building with a different version of Gradle. Currently, Gradle does not use task history from a different version.

An `upToDateWhen` criteria added to the task returns `false`.

An input property has changed since the previous execution.

One or more output files have changed since the previous execution.

In any of these cases, Gradle will consider all of the input files to be `outOfDate`. The `IncrementalTaskInputs.outOfDate(org.gradle.api.Action)` action will be executed for every input file, and the `IncrementalTaskInputs.removed(org.gradle.api.Action)` action will not be executed at all.

You can check if Gradle was able to determine the incremental changes to input files with `IncrementalTaskInputs.isIncremental()`.

§

An incremental task in action

Given the incremental task implementation above, we can explore the various change scenarios by example. Note that the various mutation tasks ('updateInputs', 'removeInput', etc) are only present for demonstration purposes: these would not normally be part of your build script.

First, consider the `IncrementalReverseTask` executed against a set of inputs for the first time. In this case, all inputs will be considered “out of date”:

#### Example 367. Running the incremental task for the first time

##### **build.gradle**

```
task incrementalReverse(type: IncrementalReverseTask) {  
    inputDir = file('inputs')  
    outputDir = file("$buildDir/outputs")  
    inputProperty = project.properties['taskInputProperty'] ?: 'original'  
}
```

##### **Build layout**

```
incrementalTask/  
  build.gradle  
  inputs/  
    1.txt  
    2.txt  
    3.txt
```

##### **Output of `gradle -q incrementalReverse`**

```
> gradle -q incrementalReverse  
ALL inputs considered out of date  
out of date: 1.txt  
out of date: 2.txt  
out of date: 3.txt
```

Naturally when the task is executed again with no changes, then the entire task is up to date and no files are reported to the task action:

#### Example 368. Running the incremental task with unchanged inputs

##### **Output of `gradle -q incrementalReverse`**

```
> gradle -q incrementalReverse
```

When an input file is modified in some way or a new input file is added, then re-executing the task results in those files being reported to `IncrementalTaskInputs.outOfDate(org.gradle.api.Action)`:

### Example 369. Running the incremental task with updated input files

#### build.gradle

```
task updateInputs() {
    doLast {
        file('inputs/1.txt').text = 'Changed content for existing file 1.'
        file('inputs/4.txt').text = 'Content for new file 4.'
    }
}
```

#### Output of `gradle -q updateInputs incrementalReverse`

```
> gradle -q updateInputs incrementalReverse
CHANGED inputs considered out of date
out of date: 1.txt
out of date: 4.txt
```

When an existing input file is removed, then re-executing the task results in that file being reported to `IncrementalTaskInputs.removed(org.gradle.api.Action)`:

### Example 370. Running the incremental task with an input file removed

#### build.gradle

```
task removeInput() {
    doLast {
        file('inputs/3.txt').delete()
    }
}
```

#### Output of `gradle -q removeInput incrementalReverse`

```
> gradle -q removeInput incrementalReverse
CHANGED inputs considered out of date
removed: 3.txt
```

When an output file is deleted (or modified), then Gradle is unable to determine which input files are out of date. In this case, *all* input files are reported to the `IncrementalTaskInputs.outOfDate(org.gradle.api.Action)` action, and no input files are reported to the `IncrementalTaskInputs.removed(org.gradle.api.Action)` action:

### Example 371. Running the incremental task with an output file removed

#### build.gradle

```
task removeOutput() {
    doLast {
        file("$buildDir/outputs/1.txt").delete()
    }
}
```

#### Output of `gradle -q removeOutput incrementalReverse`

```
> gradle -q removeOutput incrementalReverse
ALL inputs considered out of date
out of date: 1.txt
out of date: 2.txt
out of date: 3.txt
```

When a task input property is modified, Gradle is unable to determine how this property impacted the task outputs, so all input files are assumed to be out of date. So similar to the changed output file example, *all* input files are reported to the `IncrementalTaskInputs.outOfDate(org.gradle.api.Action)` action, and no input files are reported to the `IncrementalTaskInputs.removed(org.gradle.api.Action)` action:

### Example 372. Running the incremental task with an input property changed

#### Output of `gradle -q -PtaskInputProperty=changed incrementalReverse`

```
> gradle -q -PtaskInputProperty=changed incrementalReverse
ALL inputs considered out of date
out of date: 1.txt
out of date: 2.txt
out of date: 3.txt
```

§

### Storing incremental state for cached tasks

Using Gradle's `IncrementalTaskInputs` is not the only way to create tasks that only works on changes since the last execution. Tools like the Kotlin compiler provide incrementality as a built-in feature. The way this is typically implemented is that the tool stores some analysis data about the state of the previous execution in some file. If such state files are relocatable, then they can be declared as outputs of the task. This way when the task's results are loaded from cache, the next execution can already use the analysis data loaded from cache, too.

However, if the state files are non-relocatable, then they can't be shared via the build cache. Indeed, when the task is loaded from cache, any such state files must be cleaned up to prevent stale state to confuse the tool during the next execution. Gradle can ensure such stale files are removed if they are declared via `task` or a property is marked with the `@LocalState` annotation.

§

## Declaring and Using Command Line Options

**Note:** The API for exposing command line options is an incubating feature.

Sometimes a user wants to declare the value of an exposed task property on the command line instead of the build script. Being able to pass in property values on the command line is particularly helpful if they change more frequently. The task API supports a mechanism for marking a property to automatically generate a corresponding command line parameter with a specific name at runtime.

§

### Declaring a command-line option

Exposing a new command line option for a task property is straightforward. You just have to annotate the corresponding setter method of a property with `Option`. An option requires a mandatory identifier. Additionally, you can provide an optional description. A task can expose as many command line options as properties available in the class.

Let's have a look at an example to illustrate the functionality. The custom task `UrlVerify` verifies whether a given URL can be resolved by making a HTTP call and checking the response code. The URL to be verified is configurable through the property `url`. The setter method for the property is annotated with `Option`.

#### Example 373. Declaring a command line option

##### `UrlVerify.java`

```
import org.gradle.api.tasks.options.Option;

public class UrlVerify extends DefaultTask {
    private String url;

    @Option(option = "url", description = "Configures the URL to be verified.")
    public void setUrl(String url) {
        this.url = url;
    }

    @Input
    public String getUrl() {
        return url;
    }

    @TaskAction
    public void verify() {
        getLogger().quiet("Verifying URL '{}'", url);

        // verify URL by making a HTTP call
    }
}
```

All options declared for a task can be rendered as console output by running the `help` task and the `--task` option.

§

## Using an option on the command line

Using an option on the command line has to adhere to the following rules:

The option uses a double-dash as prefix e.g. `--url`. A single dash does not qualify as valid syntax for a task option.

The option argument follows directly after the task declaration e.g. `verifyUrl --url=http://www.google.com`.

Multiple options of a task can be declared in any order on the command line following the task name.

Getting back to the previous example, the build script creates a task instance of type `UrlVerify` and provides a value from the command line through the exposed option.

### Example 374. Using a command line option

#### **build.gradle**

```
task verifyUrl(type: UrlVerify)
```

Output of `gradle -q verifyUrl --url=http://www.google.com/`

```
> gradle -q verifyUrl --url=http://www.google.com/  
Verifying URL 'http://www.google.com/'
```

§

## Supported data types for options

Gradle limits the set of data types that can be used for declaring command line options. The use on the command line differ per type.

#### **boolean, Boolean**

Describes an option with the value `true` or `false`. Passing the option on the command line does not require assigning a value. For example `--enabled` equates to `true`. The absence of the option uses the default values assign to the property; that is `false` for `boolean` and `null` for the complex data type.

#### **String**

Describes an option with an arbitrary `String` value. Passing the option on the command line requires a key-value pair of option and value separated by an equals sign e.g. `--containerId=2x94held`.

#### **enum**

Describes an option as `enum`. The `enum` has to be passed on the command line as key-value pair similar to the `String` type e.g. `--log-level=DEBUG`. The provided value is not case sensitive.

**List<String>, List<enum>**

Describes an option that can takes multiple values of a given type. The values for the option have to be provided as distinct declarations e.g. `--imageId=123 --imageId=456`. Other notations like comma-separated lists or multiple values separated by a space character are currently not supported.

§

## Documenting available values for an option

In theory, an option for a property type `String` or `List<String>` can accept any arbitrary value. Expected values for such an option can be documented programmatically with the help of the annotation `OptionValues`. This annotation may be assigned to any method that returns a `List` of one of the supported data types. In addition, you have to provide the option identifier to indicate the relationship between option and available values.

**Note:** Passing a value on the command line that is not supported by the option does not fail the build or throw an exception. You'll have to implement custom logic for such behavior in the task action.

This example demonstrates the use of multiple options for a single task. The task implementation provides a list of available values for the option `output-type`.



### Example 375. Declaring available values for an option

#### UrlProcess.java

```
import org.gradle.api.tasks.options.Option;
import org.gradle.api.tasks.options.OptionValues;

public class UrlProcess extends DefaultTask {
    private String url;
    private OutputType outputType;

    @Option(option = "url", description = "Configures the URL to be write to the")
    public void setUrl(String url) {
        this.url = url;
    }

    @Input
    public String getUrl() {
        return url;
    }

    @Option(option = "output-type", description = "Configures the output type.")
    public void setOutputType(OutputType outputType) {
        this.outputType = outputType;
    }

    @OptionValues("output-type")
    public List<OutputType> getAvailableOutputTypes() {
        return new ArrayList<OutputType>(Arrays.asList(OutputType.values()));
    }

    @Input
    public OutputType getOutputType() {
        return outputType;
    }

    @TaskAction
    public void process() {
        getLogger().quiet("Writing out the URL reponse from '{}{}' to '{}{}'", url, url, url, url);

        // retrieve content from URL and write to output
    }

    private static enum OutputType {
        CONSOLE, FILE
    }
}
```

§

## Listing command line options

Command line options using the annotations `Option` and `OptionValues` are self-documenting. You will see declared options and their available values reflected in the console output of the `help` task. The output renders options in alphabetical order.

### Example 376. Listing available values for option

#### Output of `gradle -q help --task processUrl`

```
> gradle -q help --task processUrl
Detailed task information for processUrl

Path
    :processUrl

Type
    UrlProcess (UrlProcess)

Options
    --output-type    Configures the output type.
                     Available values are:
                     CONSOLE
                     FILE

    --url            Configures the URL to be write to the output.

Description
    -

Group
    -
```

§

## Limitations

Support for declaring command line options currently comes with a few limitations.

Command line options can only be declared for custom tasks via annotation. There's no programmatic equivalent for defining options.

Options cannot be declared globally e.g. on a project-level or as part of a plugin.

When assigning an option on the command line then the task exposing the option needs to be spelled out explicitly e.g. `gradle check --tests abc` does not work even though the `check` task depends on the `test` task.

§

## The Worker API

**Note:** The Worker API is an incubating feature.

As can be seen from the discussion of incremental tasks, the work that a task performs can be viewed as discrete units (i.e. a subset of inputs that are transformed to a certain subset of outputs). Many times, these units of work are highly independent of each other, meaning they can be performed in any order and simply aggregated together to form the overall action of the task. In a single threaded execution, these units of work would execute in sequence, however if we have multiple processors, it would be desirable to perform independent units of work concurrently. By doing so, we can fully utilize the available resources at build time and complete the activity of the task faster.

The Worker API provides a mechanism for doing exactly this. It allows for safe, concurrent execution of multiple items of work during a task action. But the benefits of the Worker API are not confined to parallelizing the work of a task. You can also configure a desired level of isolation such that work can be executed in an isolated classloader or even in an isolated process. Furthermore, the benefits extend beyond even the execution of a single task. Using the Worker API, Gradle can begin to execute tasks in parallel by default. In other words, once a task has submitted its work to be executed asynchronously, and has exited the task action, Gradle can then begin the execution of other independent tasks in parallel, even if those tasks are in the same project.

§

### Using the Worker API

In order to submit work to the Worker API, two things must be provided: an implementation of the unit of work, and a configuration for the unit of work. The implementation is simply a class that extends `java.lang`. This class should have a constructor that is annotated with `javax.inject.Inject` and accepts parameters that configure the class for a single unit of work. When a unit of work is submitted to the `WorkerExecutor`, an instance of this class will be created and the parameters configured for the unit of work will be passed to the constructor.

### Example 377. Creating a unit of work implementation

#### build.gradle

```
import org.gradle.workers.WorkerExecutor

import javax.inject.Inject

// The implementation of a single unit of work
class ReverseFile implements Runnable {
    File fileToReverse
    File destinationFile

    @Inject
    public ReverseFile(File fileToReverse, File destinationFile) {
        this.fileToReverse = fileToReverse
        this.destinationFile = destinationFile
    }

    @Override
    public void run() {
        destinationFile.text = fileToReverse.text.reverse()
    }
}
```

The configuration of the worker is represented by a [WorkerConfiguration](#) and is set by configuring an instance of this object at the time of submission. However, in order to submit the unit of work, it is necessary to first acquire the [WorkerExecutor](#). To do this, a constructor should be provided that is annotated with `javax.inject.Inject` and accepts a [WorkerExecutor](#) parameter. Gradle will inject the instance of [WorkerExecutor](#) at runtime when the task is created.

### Example 378. Submitting a unit of work for execution

**build.gradle**

```
class ReverseFiles extends SourceTask {
    final WorkerExecutor workerExecutor

    @OutputDirectory
    File outputDir

    // The WorkerExecutor will be injected by Gradle at runtime
    @Inject
    public ReverseFiles(WorkerExecutor workerExecutor) {
        this.workerExecutor = workerExecutor
    }

    @TaskAction
    void reverseFiles() {
        // Create and submit a unit of work for each file
        source.each { file ->
            workerExecutor.submit(ReverseFile.class) { WorkerConfiguration config
                // Use the minimum level of isolation
                config.isolationMode = IsolationMode.NONE

                // Constructor parameters for the unit of work implementation
                config.params file, project.file("${outputDir}/${file.name}")
            }
        }
    }
}
```

Note that one element of the `WorkerConfiguration` is the `params` property. These are the parameters passed to the constructor of the unit of work implementation for each item of work submitted. Any parameters provided to the unit of work *must* be `java.io.Serializable`.

Once all of the work for a task action has been submitted, it is safe to exit the task action. The work will be executed asynchronously and in parallel (up to the setting of `max-workers`). Of course, any tasks that are dependent on this task (and any subsequent task actions of this task) will not begin executing until all of the asynchronous work completes. However, other independent tasks that have no relationship to this task can begin executing immediately.

If any failures occur while executing the asynchronous work, the task will fail and a `WorkerExecutionException` will be thrown detailing the failure for each failed work item. This will be treated like any failure during task execution and will prevent any dependent tasks from executing.

In some cases, however, it might be desirable to wait for work to complete before exiting the task action. This is possible using the `WorkerExecutor.await()` method. As in the case of allowing the work to complete asynchronously, any failures that occur while executing an item of work will be surfaced as a `WorkerExecutionException` thrown from the `WorkerExecutor.await()` method.

**Note:** Note that Gradle will only begin running other independent tasks in parallel when a task has exited a task action and returned control of execution to Gradle. When `WorkerExecutor.await()` is used, execution does not leave the task action. This means that Gradle will not allow other tasks to begin executing and will wait for the task action to complete before doing so.

#### Example 379. Waiting for asynchronous work to complete

##### build.gradle

```
// Create and submit a unit of work for each file
source.each { file ->
    workerExecutor.submit(ReverseFile.class) { config ->
        config.isolationMode = IsolationMode.NONE
        // Constructor parameters for the unit of work implementation
        config.params file, project.file("${outputDir}/${file.name}")
    }
}

// Wait for all asynchronous work to complete before continuing
workerExecutor.await()
logger.lifecycle("Created ${outputDir.listFiles().size()} reversed files in ${pr
```

§

## Isolation Modes

Gradle provides three isolation modes that can be configured on a unit of work and are specified using the `IsolationMode` enum:

### IsolationMode.NONE

This states that the work should be run in a thread with a minimum of isolation. For instance, it will share the same classloader that the task is loaded from. This is the fastest level of isolation.

### IsolationMode.CLASSLOADER

This states that the work should be run in a thread with an isolated classloader. The classloader will have the classpath from the classloader that the unit of work implementation class was loaded from as well as any additional classpath entries added through `WorkerConfiguration.classpath(java.lang.Iterable)`.

### IsolationMode.PROCESS

This states that the work should be run with a maximum level of isolation by executing the work in a separate process. The classloader of the process will use the classpath from the classloader that the unit of work was loaded from as well as any additional classpath entries added through `WorkerConfiguration.classpath(java.lang.Iterable)`. Furthermore, the process will be a *Worker Daemon* which will stay alive and can be reused for future work items that may have the same requirements. This process can be configured with different settings than the Gradle JVM using `WorkerConfiguration.forkOptions(org.gradle.api.Action)`.

§

## Worker Daemons

When using `IsolationMode.PROCESS`, gradle will start a long-lived *Worker Daemon* process that can be reused for future work items.

### Example 380. Submitting an item of work to run in a worker daemon

#### **build.gradle**

```
workerExecutor.submit(ReverseFile.class) { WorkerConfiguration config ->
    // Run this work in an isolated process
    config.isolationMode = IsolationMode.PROCESS

    // Configure the options for the forked process
    config.forkOptions { JavaForkOptions options ->
        options.maxHeapSize = "512m"
        options.systemProperty "org.gradle.sample.showFileSize", "true"
    }

    // Constructor parameters for the unit of work implementation
    config.params file, project.file("${outputDir}/${file.name}")
}
```

When a unit of work for a Worker Daemon is submitted, Gradle will first look to see if a compatible, idle daemon already exists. If so, it will send the unit of work to the idle daemon, marking it as busy. If not, it will start a new daemon. When evaluating compatibility, Gradle looks at a number of criteria, all of which can be controlled through `WorkerConfiguration.forkOptions(org.gradle.api.Action)`.

#### **executable**

A daemon is considered compatible only if it uses the same java executable.

#### **classpath**

A daemon is considered compatible if its classpath contains all of the classpath entries requested. Note that a daemon is considered compatible if it has more classpath entries in addition to those requested.

#### **heap settings**

A daemon is considered compatible if it has at least the same heap size settings as requested. In other words, a daemon that has higher heap settings than requested would be considered compatible.

#### **jvm arguments**

A daemon is considered compatible if it has set all of the jvm arguments requested. Note that a daemon is considered compatible if it has additional jvm arguments beyond those requested (except for arguments treated specially such as heap settings, assertions, debug, etc).

#### **system properties**

A daemon is considered compatible if it has set all of the system properties requested with the same values. Note that a daemon is considered compatible if it has additional system properties beyond those requested.

### **environment variables**

A daemon is considered compatible if it has set all of the environment variables requested with the same values. Note that a daemon is considered compatible if it has more environment variables in addition to those requested.

### **bootstrap classpath**

A daemon is considered compatible if it contains all of the bootstrap classpath entries requested. Note that a daemon is considered compatible if it has more bootstrap classpath entries in addition to those requested.

### **debug**

A daemon is considered compatible only if debug is set to the same value as requested (true or false).

### **enable assertions**

A daemon is considered compatible only if enable assertions is set to the same value as requested (true or false).

### **default character encoding**

A daemon is considered compatible only if the default character encoding is set to the same value as requested.

Worker daemons will remain running until either the build daemon that started them is stopped, or system memory becomes scarce. When available system memory is low, Gradle will begin stopping worker daemons in an attempt to minimize memory consumption.

## **§**

### **Re-using logic between task classes**

There are different ways to re-use logic between task classes. The easiest case is when you can extract the logic you want to share in a separate method or class and then use the extracted piece of code in your tasks. For example, the `Copy` task re-uses the logic of the `Project.copy(org.gradle.api.Action)` method. Another option is to add a task dependency on the task which outputs you want to re-use. Other options include using task rules or the worker API.



# Writing Custom Plugins

A Gradle plugin packages up reusable pieces of build logic, which can be used across many different projects and builds. Gradle allows you to implement your own plugins, so you can reuse your build logic, and share it with others.

You can implement a Gradle plugin in any language you like, provided the implementation ends up compiled as bytecode. In our examples, we are going to use Groovy as the implementation language. Groovy, Java or Kotlin are all good choices as the language to use to implement a plugin, as the Gradle API has been designed to work well with these languages. In general, a plugin implemented using Java or Kotlin, which are statically typed, will perform better than the same plugin implemented using Groovy.

## §

### Packaging a plugin

There are several places where you can put the source for the plugin.

#### **Build script**

You can include the source for the plugin directly in the build script. This has the benefit that the plugin is automatically compiled and included in the classpath of the build script without you having to do anything. However, the plugin is not visible outside the build script, and so you cannot reuse the plugin outside the build script it is defined in.

#### **buildSrc project**

You can put the source for the plugin in the `rootProjectDir/buildSrc/src/main/groovy` directory. Gradle will take care of compiling and testing the plugin and making it available on the classpath of the build script. The plugin is visible to every build script used by the build. However, it is not visible outside the build, and so you cannot reuse the plugin outside the build it is defined in.

See *Organizing Gradle Projects* for more details about the `buildSrc` project.

#### **Standalone project**

You can create a separate project for your plugin. This project produces and publishes a JAR which you can then use in multiple builds and share with others. Generally, this JAR might include some plugins, or bundle several related task classes into a single library. Or some combination of the two.

In our examples, we will start with the plugin in the build script, to keep things simple. Then we will look at creating a standalone project.

§

## Writing a simple plugin

To create a Gradle plugin, you need to write a class that implements the [Plugin](#) interface. When the plugin is applied to a project, Gradle creates an instance of the plugin class and calls the instance's [Plugin.apply\(T\)](#) method. The project object is passed as a parameter, which the plugin can use to configure the project however it needs to. The following sample contains a greeting plugin, which adds a `hello` task to the project.

### Example 381. A custom plugin

**build.gradle**

```
class GreetingPlugin implements Plugin<Project> {
    void apply(Project project) {
        project.task('hello') {
            doLast {
                println 'Hello from the GreetingPlugin'
            }
        }
    }
}

// Apply the plugin
apply plugin: GreetingPlugin
```

**Output of `gradle -q hello`**

```
> gradle -q hello
Hello from the GreetingPlugin
```

One thing to note is that a new instance of a plugin is created for each project it is applied to. Also note that the [Plugin](#) class is a generic type. This example has it receiving the [Project](#) type as a type parameter. A plugin can instead receive a parameter of type [Settings](#), in which case the plugin can be applied in a settings script, or a parameter of type [Gradle](#), in which case the plugin can be applied in an initialization script.

§

## Making the plugin configurable

Most plugins need to obtain some configuration from the build script. One method for doing this is to use *extension objects*. The Gradle [Project](#) has an associated [ExtensionContainer](#) object that contains all the settings and properties for the plugins that have been applied to the project. You can provide configuration for your plugin by adding an extension object to this container. An extension object is simply a Java Bean compliant class. Groovy is a good language choice to implement an extension object because plain old Groovy objects contain all the getter and setter methods that a Java Bean requires. Java and Kotlin are other good choices.

Let's add a simple extension object to the project. Here we add a `greeting` extension object to the project, which allows you to configure the greeting.

### Example 382. A custom plugin extension

#### **build.gradle**

```
class GreetingPluginExtension {
    String message = 'Hello from GreetingPlugin'
}

class GreetingPlugin implements Plugin<Project> {
    void apply(Project project) {
        // Add the 'greeting' extension object
        def extension = project.extensions.create('greeting', GreetingPluginExtension)
        // Add a task that uses configuration from the extension object
        project.task('hello') {
            doLast {
                println extension.message
            }
        }
    }
}

apply plugin: GreetingPlugin

// Configure the extension
greeting.message = 'Hi from Gradle'
```

#### **Output of `gradle -q hello`**

```
> gradle -q hello
Hi from Gradle
```

In this example, `GreetingPluginExtension` is a plain old Groovy object with a property called `message`. The extension object is added to the plugin list with the name `greeting`. This object then becomes available as a project property with the same name as the extension object.

Oftentimes, you have several related properties you need to specify on a single plugin. Gradle adds a configuration closure block for each extension object, so you can group settings together. The following example shows you how this works.

### Example 383. A custom plugin with configuration closure

**build.gradle**

```
class GreetingPluginExtension {
    String message
    String greeter
}

class GreetingPlugin implements Plugin<Project> {
    void apply(Project project) {
        def extension = project.extensions.create('greeting', GreetingPluginExtension)
        project.task('hello') {
            doLast {
                println "${extension.message} from ${extension.greeter}"
            }
        }
    }
}

apply plugin: GreetingPlugin

// Configure the extension using a DSL block
greeting {
    message = 'Hi'
    greeter = 'Gradle'
}
```

**Output of `gradle -q hello`**

```
> gradle -q hello
Hi from Gradle
```

In this example, several settings can be grouped together within the `greeting` closure. The name of the closure block in the build script (`greeting`) needs to match the extension object name. Then, when the closure is executed, the fields on the extension object will be mapped to the variables within the closure based on the standard Groovy closure delegate feature.

§

## Working with files in custom tasks and plugins

When developing custom tasks and plugins, it's a good idea to be very flexible when accepting input configuration for file locations. To do this, you can leverage the `Project.file(java.lang.Object)` method to resolve values to files as late as possible.

### Example 384. Evaluating file properties lazily

#### build.gradle

```
class GreetingToFileTask extends DefaultTask {

    def destination

    File getDestination() {
        project.file(destination)
    }

    @TaskAction
    def greet() {
        def file = getDestination()
        file.parentFile.mkdirs()
        file.write 'Hello!'
    }
}

task greet(type: GreetingToFileTask) {
    destination = { project.greetingFile }
}

task sayGreeting(dependsOn: greet) {
    doLast {
        println file(greetingFile).text
    }
}

ext.greetingFile = "$buildDir/hello.txt"
```

#### Output of `gradle -q sayGreeting`

```
> gradle -q sayGreeting
Hello!
```

In this example, we configure the `greet` task `destination` property as a closure, which is evaluated with the `Project.file(java.lang.Object)` method to turn the return value of the closure into a `File` object at the last minute. You will notice that in the example above we specify the `greetingFile` property value after we have configured to use it for the task. This kind of lazy evaluation is a key benefit of accepting any value when setting a file property, then resolving that value when reading the property.

## §

### Mapping extension properties to task properties

Capturing user input from the build script through an extension and mapping it to input/output properties of a custom task is considered a best practice. The end user only interacts with the exposed DSL defined by the extension. The imperative logic is hidden in the plugin implementation.

The extension declaration in the build script as well as the mapping between extension properties and custom task properties occurs during Gradle's configuration phase of the build lifecycle. To avoid evaluation order issues, the actual value of a mapped property has to be resolved during the execution phase. For more information please see the section called "Build phases". Gradle's API offers types for representing a property that should be lazily evaluated e.g. during execution time. Refer to *Lazy Configuration* for more information.

The following demonstrates the usage of the type for mapping an extension property to a task property:

#### **Example 385. Mapping extension properties to task properties**

**build.gradle**

```

class GreetingPlugin implements Plugin<Project> {
    void apply(Project project) {
        def extension = project.extensions.create('greeting', GreetingPluginExtension)
        project.tasks.create('hello', Greeting) {
            message = extension.message
            outputFiles = extension.outputFiles
        }
    }
}

class GreetingPluginExtension {
    final Property<String> message
    final ConfigurableFileCollection outputFiles

    GreetingPluginExtension(Project project) {
        message = project.objects.property(String)
        message.set('Hello from GreetingPlugin')
        outputFiles = project.layout.configurableFiles()
    }

    void setOutputFiles(FileCollection outputFiles) {
        this.outputFiles.setFrom(outputFiles)
    }
}

class Greeting extends DefaultTask {
    final Property<String> message = project.objects.property(String)
    final ConfigurableFileCollection outputFiles = project.layout.configurableFiles()

    void setOutputFiles(FileCollection outputFiles) {
        this.outputFiles.setFrom(outputFiles)
    }

    @TaskAction
    void printMessage() {
        outputFiles.each {
            logger.quiet "Writing message 'Hi from Gradle' to file"
            it.text = message.get()
        }
    }
}

apply plugin: GreetingPlugin

greeting {
    message = 'Hi from Gradle'
    outputFiles = layout.files('a.txt', 'b.txt')
}

```

**Note:** The code for this example can be found at `samples/userguide/tasks/mapExtensionPro` in the ‘-all’ distribution of Gradle.

Output of `gradle -q hello`

```
> gradle -q hello
Writing message 'Hi from Gradle' to file
Writing message 'Hi from Gradle' to file
```

§

## A standalone project

Now we will move our plugin to a standalone project, so we can publish it and share it with others. This project is simply a Groovy project that produces a JAR containing the plugin classes. Here is a simple build script for the project. It applies the Groovy plugin, and adds the Gradle API as a compile-time dependency.

### Example 386. A build for a custom plugin

```
build.gradle
apply plugin: 'groovy'

dependencies {
    compile gradleApi()
    compile localGroovy()
}
```

**Note:** The code for this example can be found at `samples/customPlugin/plugin` in the ‘-all’ distribution of Gradle.

So how does Gradle find the `Plugin` implementation? The answer is you need to provide a properties file in the jar’s `META-INF/gradle-plugins` directory that matches the id of your plugin.

### Example 387. Wiring for a custom plugin

```
src/main/resources/META-INF/gradle-plugins/org.samples.greeting.properties
implementation-class=org.gradle.GreetingPlugin
```

Notice that the properties filename matches the plugin id and is placed in the resources folder, and that the `implementation-class` property identifies the `Plugin` implementation class.

§

## Creating a plugin id

Plugin ids are fully qualified in a manner similar to Java packages (i.e. a reverse domain name). This helps to avoid collisions and provides a way to group plugins with similar ownership.



Your plugin id should be a combination of components that reflect namespace (a reasonable pointer to you or your organization) and the name of the plugin it provides. For example if you had a Github account named "foo" and your plugin was named "bar", a suitable plugin id might be `com.github.foo.bar`. Similarly, if the plugin was developed at the baz organization, the plugin id might be `org.baz.bar`.

Plugin ids should conform to the following:

May contain any alphanumeric character, '.', and '-'.

Must contain at least one '.' character separating the namespace from the name of the plugin.

Conventionally use a lowercase reverse domain name convention for the namespace.

Conventionally use only lowercase characters in the name.

`org.gradle` and `com.gradleware` namespaces may not be used.

Cannot start or end with a '.' character.

Cannot contain consecutive '.' characters (i.e. '..').

Although there are conventional similarities between plugin ids and package names, package names are generally more detailed than is necessary for a plugin id. For instance, it might seem reasonable to add "gradle" as a component of your plugin id, but since plugin ids are only used for Gradle plugins, this would be superfluous. Generally, a namespace that identifies ownership and a name are all that are needed for a good plugin id.

§

## Publishing your plugin

If you are publishing your plugin internally for use within your organization, you can publish it like any other code artifact. See the ivy and maven chapters on publishing artifacts.

If you are interested in publishing your plugin to be used by the wider Gradle community, you can publish it to the Gradle plugin portal. This site provides the ability to search for and gather information about plugins contributed by the Gradle community. See the instructions here on how to make your plugin available on this site.

§

## Using your plugin in another project

To use a plugin in a build script, you need to add the plugin classes to the build script's classpath. To do this, you use a "buildscript { }" block, as described in the section called "Applying plugins with the buildscript block". The following example shows how you might do this when the JAR containing the plugin has been published to a local repository:

### Example 388. Using a custom plugin in another project

#### build.gradle

```
buildscript {
    repositories {
        maven {
            url uri('../repo')
        }
    }
    dependencies {
        classpath group: 'org.gradle', name: 'customPlugin',
            version: '1.0-SNAPSHOT'
    }
}
apply plugin: 'org.samples.greeting'
```

Alternatively, if your plugin is published to the plugin portal, you can use the incubating plugins DSL (see the section called “Applying plugins with the plugins DSL”) to apply the plugin:

### Example 389. Applying a community plugin with the plugins DSL

#### build.gradle

```
plugins {
    id 'com.jfrog.bintray' version '0.4.1'
}
```

§

## Writing tests for your plugin

You can use the `ProjectBuilder` class to create `Project` instances to use when you test your plugin implementation.

### Example 390. Testing a custom plugin

#### src/test/groovy/org/gradle/GreetingPluginTest.groovy

```
class GreetingPluginTest {
    @Test
    public void greeterPluginAddsGreetingTaskToProject() {
        Project project = ProjectBuilder.builder().build()
        project.pluginManager.apply 'org.samples.greeting'

        assertTrue(project.tasks.hello instanceof GreetingTask)
    }
}
```

§

## Using the Java Gradle Plugin development plugin

You can use the incubating Java Gradle Plugin development plugin to eliminate some of the boilerplate declarations in your build script and provide some basic validations of plugin metadata. This plugin will automatically apply the Java plugin, add the `gradleApi()` dependency to the compile configuration, and perform plugin metadata validations as part of the `jar` task execution.

### Example 391. Using the Java Gradle Plugin Development plugin

```
build.gradle
plugins {
    id 'java-gradle-plugin'
}
```

When publishing plugins to custom plugin repositories using the `ivy` or `maven publish` plugins, the Java Gradle Plugin development plugin will also generate plugin marker artifacts named based on the plugin id which depend on the plugin's implementation artifact.

§

## Providing a configuration DSL for the plugin

As we saw above, you can use an extension object to provide configuration for your plugin. Using an extension object also extends the Gradle DSL to add a project property and DSL block for the plugin. An extension object is simply a regular object, and so you can provide DSL elements nested inside this block by adding properties and methods to the extension object.

Gradle provides several conveniences to help create a well-behaved DSL for your plugin.

§

### Nested DSL elements

When Gradle creates a task or extension object, Gradle *decorates* the implementation class to mix in DSL support. To create a nested DSL element you can use the `ObjectFactory` type to create objects that are similarly decorated. These decorated objects can then be made visible to the DSL through properties and methods of the plugin's extension:

### Example 392. Nested DSL elements

#### build.gradle

```
class Person {
    String name
}

class GreetingPluginExtension {
    String message
    final Person greeter

    @javax.inject.Inject
    GreetingPluginExtension(ObjectFactory objectFactory) {
        // Create a Person instance
        greeter = objectFactory.newInstance(Person)
    }

    void greeter(Action<? super Person> action) {
        action.execute(greeter)
    }
}

class GreetingPlugin implements Plugin<Project> {
    void apply(Project project) {
        // Create the extension, passing in an ObjectFactory for it to use
        def extension = project.extensions.create('greeting', GreetingPluginExtension)
        project.task('hello') {
            doLast {
                println "${extension.message} from ${extension.greeter.name}"
            }
        }
    }
}

apply plugin: GreetingPlugin

greeting {
    message = 'Hi'
    greeter {
        name = 'Gradle'
    }
}
```

#### Output of gradle -q hello

```
> gradle -q hello
Hi from Gradle
```

In this example, the plugin passes the project's `ObjectFactory` to the extension object through its constructor. The constructor uses this to create a nested object and makes this object available to the DSL

through the `greeter` property.

§

### Configuring a collection of objects

Gradle provides some utility classes for maintaining collections of objects, intended to work well with the Gradle DSL.

#### **Example 393. Managing a collection of objects**

**`build.gradle`**

```

class Book {
    final String name
    File sourceFile

    Book(String name) {
        this.name = name
    }
}

class DocumentationPlugin implements Plugin<Project> {
    void apply(Project project) {
        // Create a container of Book instances
        def books = project.container(Book)
        books.all {
            sourceFile = project.file("src/docs/$name")
        }
        // Add the container as an extension object
        project.extensions.books = books
    }
}

apply plugin: DocumentationPlugin

// Configure the container
books {
    quickStart {
        sourceFile = file('src/docs/quick-start')
    }
    userGuide {

    }
    developerGuide {

    }
}

task books {
    doLast {
        books.each { book ->
            println "$book.name -> $book.sourceFile"
        }
    }
}

```

#### Output of **gradle -q books**

```

> gradle -q books
developerGuide -> /home/user/gradle/samples/userguide/customPlugins/customPluginWithD
quickStart -> /home/user/gradle/samples/userguide/customPlugins/customPluginWithD
userGuide -> /home/user/gradle/samples/userguide/customPlugins/customPluginWithD

```

The `Project.container(java.lang.Class)` methods create instances of `NamedDomainObjectContainer`, that have many useful methods for managing and configuring the objects. In order to use a type with any of the `project.container` methods, it MUST expose a property named "name" as the unique, and constant, name for the object. The `project.container(Class)` variant of the container method creates new instances by attempting to invoke the constructor of the class that takes a single string argument, which is the desired name of the object. See the above link for `project.` method variants that allow custom instantiation strategies.

# Gradle Plugin Development Plugin

**Note:** The Java Gradle plugin development plugin is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The Java Gradle Plugin development plugin can be used to assist in the development of Gradle plugins. It automatically applies the Java plugin, adds the `gradleApi()` dependency to the compile configuration and performs validation of plugin metadata during `jar` task execution.

The plugin also integrates with TestKit, a library that aids in writing and executing functional tests for plugin code. It automatically adds the `gradleTestKit()` dependency to the test compile configuration and generates a plugin classpath manifest file consumed by a `GradleRunner` instance if found. Please refer to the section called “Automatic injection with the Java Gradle Plugin Development plugin” for more on its usage, configuration options and samples.

§

## Usage

To use the Java Gradle Plugin Development plugin, include the following in your build script:

### Example 394. Using the Java Gradle Plugin Development plugin

**build.gradle**

```
plugins {  
    id 'java-gradle-plugin'  
}
```

Applying the plugin automatically applies the Java plugin and adds the `gradleApi()` dependency to the compile configuration. It also adds some validations to the build.

The following validations are performed:

There is a plugin descriptor defined for the plugin.

The plugin descriptor contains an `implementation-class` property.

The `implementation-class` property references a valid class file in the jar.

Each property getter or the corresponding field must be annotated with a property annotation like `@InputFile`



and `@OutputDirectory`. Properties that don't participate in up-to-date checks should be annotated with `@I`.

Any failed validations will result in a warning message.

For each plugin you are developing, add an entry to the `gradlePlugin {}` script block:

**Example 395. Using the `gradlePlugin {}` block.**

```
build.gradle
gradlePlugin {
    plugins {
        simplePlugin {
            id = 'org.gradle.sample.simple-plugin'
            implementationClass = 'org.gradle.sample.SimplePlugin'
        }
    }
}
```

The `gradlePlugin {}` block defines the plugins being built by the project including the `id` and `implementationClass` of the plugin. From this data about the plugins being developed, Gradle can automatically:

Generate the plugin descriptor in the `jar` file's `META-INF` directory.

Configure the Maven or Ivy publishing plugins to publish a Plugin Marker Artifact for each plugin.

# Lazy Configuration

As a build grows in complexity, knowing when and where a particular value is configured can become difficult to reason about. Gradle provides several ways to manage this complexity using *lazy configuration*.

§

## Lazy properties

**Note:** The Provider API is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

Gradle provides lazy properties, which delay the calculation of a property's value until it's absolutely required. Lazy types are faster, more understandable and better instrumented than the internal convention mapping mechanisms. This provides two main benefits to build script and plugin authors:

Build authors can wire together Gradle models without worrying when a particular property's value will be known. For example, when you want to map properties in an extension to task properties but the values aren't known until the build script configures them.

Build authors can avoid resource intensive work during the configuration phase, which can have a direct impact on maximum build performance. For example, when a property value comes from parsing a file.

Gradle represents lazy properties with two interfaces:

`Provider` are properties that can only be queried and cannot be changed.

Properties with these types are read-only.

The method `Provider.get()` returns the current value of the property.

A `Provider` can be created by the factory method `ProviderFactory.provider(java.util.concurrent.Callable)`.

`Property` are properties that can be queried and overwritten.

Properties with these types are configurable.

`Property` implements the `Provider` interface.

The method `Property.set(T)` specifies a value for the property, overwriting whatever value may have

been present.

The method `Property.set(org.gradle.api.provider.Provider)` specifies a `Provider` for the value for the property, overwriting whatever value may have been present. This allows you to wire together `Provider` and `Property` instances before the values are configured.

A `Property` can be created by the factory method `ObjectFactory.property(java.lang.Class)`.

Neither of these types nor their subtypes are intended to be implemented by a build script or plugin author. Gradle provides several factory methods to create instances of these types. See the Quick Reference for all of the types and factories available.

Lazy properties are intended to be passed around and only evaluated when required (usually, during the execution phase). For more information about the Gradle build phases, please see the section called “Build phases”.

The following demonstrates a task with a read-only property and a configurable property:

#### Example 396. Using a read-only and configurable property

##### build.gradle

```
class Greeting extends DefaultTask {
    // Configurable by the user
    @Input
    final Property<String> message = project.objects.property(String)

    // Read-only property calculated from the message
    @Internal
    final Provider<String> fullMessage = message.map { it + " from Gradle" }

    @TaskAction
    void printMessage() {
        logger.quiet(fullMessage.get())
    }
}

task greeting(type: Greeting) {
    // Note that this is effectively calling Property.set()
    message = 'Hi'
}
```

##### Output of `gradle greeting`

```
> gradle greeting

> Task :greeting
Hi from Gradle

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

The `Greeting` task has a `Property<String>` for the mutable part of the message and a `Provider<String>` for the calculated, read-only, message.

**Note:** Note that Groovy Gradle DSL will generate setter methods for each `Property`-typed property in a task implementation. These setter methods allow you to configure the property using the assignment (`=`) operator as a convenience.

§

## Creating a Property or Provider

If provider types are not intended to be implemented directly by build script or plugin authors, how do you create a new one? Gradle provides various factory APIs to create new instances of both `Provider` and `Property`:

`ProviderFactory.provider(java.util.concurrent.Callable)` instantiates a new `Provider`. An instance of the `ProviderFactory` can be referenced from `Project.getProviders()` or by injecting `ProviderFactory` through a constructor or method.

`ObjectFactory.property(java.lang.Class)` instantiates a new `Property`. An instance of the `ObjectFactory` can be referenced from `Project.getObjects()` or by injecting `ObjectFactory` through a constructor or method.

**Note:** `Project` does not provide a specific method signature for creating a provider from a `groovy.lang.Closure`. When writing a plugin with Groovy, you can use the method signature accepting a `java.util.concurrent.Callable` parameter. Groovy's Closure to type coercion will take care of the rest.

§

## Working with files and Providers

In *Working With Files*, we introduced four collection types for `File`-like objects:

**Table 26. Collection of files recap**

Read-only Type	Configurable Type
<code>FileCollection</code>	<code>ConfigurableFileCollection</code>
<code>FileTree</code>	<code>ConfigurableFileTree</code>

All of these types are also considered `Provider` types.

In this section, we are going to introduce more strongly typed models for a `FileSystemLocation`: `Directory` and `RegularFile`. These types shouldn't be confused with the standard Java `java.io.File` type as they tell Gradle to expect more specific values (a directory or a non-directory, regular file).

Gradle provides two specialized `Property` subtypes for dealing with these types: `RegularFileProperty` and `DirectoryProperty`. `ProjectLayout` has methods to create these: `ProjectLayout.fileProperty()` and `ProjectLayout.directoryProperty()`.

A `DirectoryProperty` can also be used to create a lazily evaluated `Provider` for a `Directory` and `Reg` via `DirectoryProperty.dir(java.lang.String)` and `DirectoryProperty.file(java.lang.String)` respectively. These methods create paths that are relative to the location set for the original `DirectoryProperty`.

### Example 397. Using file and directory property

#### build.gradle

```
class FooExtension {
    final DirectoryProperty someDirectory
    final RegularFileProperty someFile
    final ConfigurableFileCollection someFiles

    FooExtension(Project project) {
        someDirectory = project.layout.directoryProperty()
        someFile = project.layout.fileProperty()
        someFiles = project.layout.configurableFiles()
    }
}

project.extensions.create('foo', FooExtension, project)

foo {
    someDirectory = project.layout.projectDirectory.dir('some-directory')
    someFile = project.layout.buildDirectory.file('some-file')
    someFiles.from project.layout.configurableFiles(someDirectory, someFile)
}

task print {
    doLast {
        def someDirectory = project.foo.someDirectory.get().asFile
        logger.quiet("foo.someDirectory = " + someDirectory)
        logger.quiet("foo.someFiles contains someDirectory? " + project.foo.someFiles.contains(someDirectory))

        def someFile = project.foo.someFile.get().asFile
        logger.quiet("foo.someFile = " + someFile)
        logger.quiet("foo.someFiles contains someFile? " + project.foo.someFiles.contains(someFile))
    }
}
```

#### Output of `gradle print`

```
> gradle print

> Task :print
foo.someDirectory = /home/user/gradle/samples/providers/fileAndDirectoryProperty/build
foo.someFiles contains someDirectory? true
foo.someFile = /home/user/gradle/samples/providers/fileAndDirectoryProperty/build
foo.someFiles contains someFile? true

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

This example shows how `Provider` types can be used inside an extension. Lazy values for `Project.getBuildDir()` and `Project.getProjectDir()` can be accessed through

```
Project.getLayout() with ProjectLayout.getBuildDirectory() and  
ProjectLayout.getProjectDirectory().
```

§

## Working with task dependencies and Providers

Many builds have several tasks that depend on each other. This usually means that one task processes the outputs of another task as an input. For these outputs and inputs, we need to know their locations on the file system and appropriately configure each task to know where to look. This can be cumbersome if any of these values are configurable by a user or configured by multiple plugins.

To make this easier, Gradle offers convenient APIs for defining files or directories as task inputs and outputs in a descriptive way. As an example consider the following plugin with a producer and consumer task, which are wired together via inputs and outputs:

### Example 398. Implicit task dependency

```
build.gradle
```

```

class Producer extends DefaultTask {
    @OutputFile
    final RegularFileProperty outputFile = newOutputFile()

    @TaskAction
    void produce() {
        String message = 'Hello, World!'
        def output = outputFile.get().asFile
        output.text = message
        logger.quiet("Wrote '${message}' to ${output}")
    }
}

class Consumer extends DefaultTask {
    @InputFile
    final RegularFileProperty inputFile = newInputFile()

    @TaskAction
    void consume() {
        def input = inputFile.get().asFile
        def message = input.text
        logger.quiet("Read '${message}' from ${input}")
    }
}

task producer(type: Producer)
task consumer(type: Consumer)

// Wire property from producer to consumer task
consumer.inputFile = producer.outputFile

// Set values for the producer lazily
// Note that the consumer does not need to be changed again.
producer.outputFile = layout.buildDirectory.file('file.txt')

// Change the base output directory.
// Note that this automatically changes producer.outputFile and consumer.inputFi.
buildDir = 'output'

```

Output of **gradle consumer**



```

> gradle consumer

> Task :producer
Wrote 'Hello, World!' to /home/user/gradle/samples/providers/implicitTaskDepende

> Task :consumer
Read 'Hello, World!' from /home/user/gradle/samples/providers/implicitTaskDepende

BUILD SUCCESSFUL in 0s
2 actionable tasks: 2 executed

```

In the example above, the task outputs and inputs are connected before any location is defined. This is possible because the input and output properties use the `Provider` API. The output property is created with `DefaultTask.newOutputFile()` and the input property is created with `DefaultTask.newInputFile()`. Values are only resolved when they are needed during execution. The setters can be called at any time before the task is executed and the change will automatically affect all related input and output properties.

Another thing to note is the absence of any explicit task dependency. Properties created via `newOutputFile()` and `newOutputDirectory()` bring knowledge about which task is generating them, so using them as task input will implicitly link tasks together.

§

## Working with collection Providers

In this section, we are going to explore lazy collections. They work exactly like any other `Provider` and, just like `FileSystemLocation` providers, they have additional modeling around them. There are two provider interfaces available, one for `List` values and another for `Set` values:

For `List` values the interface is called `ListProperty`. You can create a new `ListProperty` using `ObjectFactory.listProperty(java.lang.Class)` and specifying the element's type.

For `Set` values the interface is called `SetProperty`. You can create a new `SetProperty` using `ObjectFactory.setProperty(java.lang.Class)` and specifying the element's type.

This type of property allows you to overwrite the entire collection value with `HasMultipleValues.set(java.lang.Iterable)` and `HasMultipleValues.set(org.gradle.api.provider.Provider)` or add new elements through the various `add` methods:

`HasMultipleValues.add(T)`: Add a single concrete element to the collection

`HasMultipleValues.add(org.gradle.api.provider.Provider)`: Add a lazily evaluated element to the collection

`HasMultipleValues.addAll(org.gradle.api.provider.Provider)`: Add a lazily evaluated collection of elements to the list

Just like every `Provider`, the collection is calculated when `Provider.get()` is called. The following example shows the `ListProperty` in action:

#### Example 399. List property

##### build.gradle

```
task print {
    doLast {
        ListProperty<String> list = project.objects.listProperty(String)

        // Resolve the list
        logger.quiet('The list contains: ' + list.get())

        // Add elements to the empty list
        list.add(project.provider { 'element-1' }) // Add a provider element
        list.add('element-2')                     // Add a concrete element

        // Resolve the list
        logger.quiet('The list contains: ' + list.get())

        // Overwrite the entire list with a new list
        list.set(['element-3', 'element-4'])

        // Resolve the list
        logger.quiet('The list contains: ' + list.get())

        // Add more elements through a list provider
        list.addAll(project.provider { ['element-5', 'element-6'] })

        // Resolve the list
        logger.quiet('The list contains: ' + list.get())
    }
}
```

##### Output of gradle print

```
> gradle print

> Task :print
The list contains: []
The list contains: [element-1, element-2]
The list contains: [element-3, element-4]
The list contains: [element-3, element-4, element-5, element-6]

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

## §

### Guidelines

This section will introduce guidelines to be successful with the Provider API. To see those guidelines in action, have a look at `gradle-site-plugin`, a Gradle plugin demonstrating established techniques and practices for plugin development.

The `Property` and `Provider` types have all of the overloads you need to query or configure a value. For this reason, you should follow the following guidelines:

For configurable properties, expose the `Property` directly through a single getter.

For non-configurable properties, expose an `Provider` directly through a single getter.

Avoid simplifying calls like `obj.getProperty().get()` and `obj.getProperty().set(T)` in your code by introducing additional getters and setters.

When migrating your plugin to use providers, follow these guidelines:

If it's a new property, expose it as a `Property` or `Provider` using a single getter.

If it's incubating, change it to use a `Property` or `Provider` using a single getter.

If it's a stable property, add a new `Property` or `Provider` and deprecate the old one. You should wire the old getter/setters into the new property as appropriate.

## §

### Future development

Going forward, new properties will use the Provider API. The Groovy Gradle DSL adds convenience methods to make the use of Providers mostly transparent in build scripts. Existing tasks will have their existing "raw" properties replaced by Providers as needed and in a backwards compatible way. New tasks will be designed with the Provider API.

The Provider API is incubating. Please create new issues at `gradle/gradle` to report bugs or to submit use cases for new features.

## Provider API Quick Reference

**Table 27. Lazy properties summary**

description	Read-only	Configurable	Factory
file on disk	<code>Provider&lt;RegularFile&gt;</code>	<code>RegularFileProperty</code>	<ul style="list-style-type: none"> <li><code>ProjectLayout.fileProperty()</code></li> <li><code>Directory.file(java.lang.String)</code></li> <li><code>DirectoryProperty.file(java.lang.String)</code></li> </ul>
file used as a task put/output	<code>Provider&lt;RegularFile&gt;</code>	<code>RegularFileProperty</code>	<ul style="list-style-type: none"> <li><code>DefaultTask.newInputFile()</code></li> <li><code>DefaultTask.newOutputFile()</code></li> </ul>
directory on disk	<code>Provider&lt;Directory&gt;</code>	<code>DirectoryProperty</code>	<ul style="list-style-type: none"> <li><code>ProjectLayout.directoryProperty()</code></li> <li><code>Directory.dir(java.lang.String)</code></li> <li><code>DirectoryProperty.dir(java.lang.String)</code></li> </ul>
directory used as a task put/output	<code>Provider&lt;Directory&gt;</code>	<code>DirectoryProperty</code>	<ul style="list-style-type: none"> <li><code>DefaultTask.newInputDirectory()</code></li> <li><code>DefaultTask.newOutputDirectory()</code></li> </ul>
collection of files	<code>FileCollection</code>	<code>ConfigurableFileCollection</code>	<ul style="list-style-type: none"> <li><code>Project.files(java.lang.Object[])</code></li> <li><code>ProjectLayout.configurableFiles(java.lang.Object[])</code></li> <li><code>ProjectLayout.files(java.lang.Object[])</code></li> </ul>
hierarchy of files	<code>FileTree</code>	<code>ConfigurableFileTree</code>	<ul style="list-style-type: none"> <li><code>Project.fileTree(java.lang.Object)</code></li> </ul>
list of any type	<code>Provider&lt;List&lt;T&gt;&gt;</code>	<code>ListProperty</code>	<ul style="list-style-type: none"> <li><code>ObjectFactory.listProperty(java.lang.Class)</code></li> </ul>
set of any type	<code>Provider&lt;Set&lt;T&gt;&gt;</code>	<code>SetProperty</code>	<ul style="list-style-type: none"> <li><code>ObjectFactory.setProperty(java.lang.Class)</code></li> </ul>
any other type	<code>Provider&lt;T&gt;</code>	<code>Property&lt;T&gt;</code>	<ul style="list-style-type: none"> <li><code>ObjectFactory.property(java.lang.Class)</code></li> </ul>

# Task Configuration Avoidance

We are asking early adopters to try out a new API for creating and configuring tasks to iron out any issues and gather feedback. This chapter provides a quick introduction to the feature and explains some guidelines for migrating your build to use the new API. We intend for this new API to eventually replace the existing API through our usual deprecation process over several major releases.

**Note:** The new Task configuration API is currently incubating. Please be aware that the DSL or API may change in minor Gradle versions.

## §

### What is the new API good for?

In a nutshell, the new API allows builds to avoid the cost of creating and configuring tasks during Gradle's configuration phase when those tasks will never be executed. We identified task configuration as a contributor to overall configuration time. Configuration time affects every build, so making it faster is good for everyone. For example, if you're only compiling, Gradle doesn't need to also configure code quality, testing and publishing tasks. For tasks that aren't used often by developers, configuration can be expensive (e.g., running `git status` or querying a webservice) and can slow down builds that do not need to execute them. This new API avoids configuring those tasks if they are not needed.

This feature is designed to be backwards compatible when mixed with the old and new APIs, so you can gradually migrate your plugins and build scripts to the new API. Instead of immediately creating a task and running all configuration actions, Gradle exposes a [Provider](#) to a task. A task will only be created and configured when the task is required. If at any point, a task registered with the new API is accessed through the old API, the task will be created and configured just as if it had been created with the old API.

Many built-in Gradle plugins have been converted to use this new API already, so you may see some benefits without changing anything.

## §

### What do we want you to do?

We've been using this feature in many of the built-in Gradle plugins, internal Gradle projects and the Gradle build itself. Now we would appreciate your help in evaluating it with your builds as well.

We'd like for you to take a few steps:

Try your build with the latest nightly (see the version number at the top of this page).

How many tasks do you see registered with the new API? See the section called “How do I know if it's working?” for how to find this.

Which task types are most numerous? Which ones are created with the old API? Which ones are registered with the new API, but have been created/configured anyways?

Following the section called “Migration Guide”, change your build scripts to use the new API to avoid creating/configuring tasks that are from the built-in Gradle plugins. Is there an impact to the number of tasks that are created?

Convert some of your custom plugins/tasks to use the new API. Is there an impact to the number of tasks using the new API and the number of new API tasks that are created?

Run the gradle-profiler to measure the difference between a build with less task configuration and a build where all tasks are configured. What do you see? Use the scenario file below.

§

## Guidelines

§

How do I defer task creation?

This feature requires build authors to opt-in by migrating task creation from the `TaskContainer.create(java.lang.String)` APIs to the `TaskContainer.register(java.lang.String)` APIs. The `register(...)` API registers a task to be created at a later time if and only if the task is needed. The `create(...)` API continues to eagerly create and configure tasks when it is called.

Using the new creation API may not be enough to avoid all task configuration completely. You may need to change other code that configures tasks by name or by type, as explained in the following sections.

§

How do I defer task configuration?

Existing APIs like `DomainObjectCollection.all(org.gradle.api.Action)` and `DomainObjectCollection.withType(java.lang.Class, org.gradle.api.Action)` will immediately create and configure any registered tasks. To defer task configuration, you will need to migrate to a new API equivalent. See the table below to identify the new API alternative.

§

How do I reference a task without creating/configuring it?

Calling `Provider.get()` or looking up a task by name with `TaskCollection.getByName(java.lang.String)` will cause the task to be created and configured. Methods like `Task.dependsOn(java.lang.Object[])` and `ConfigurableFileCollection.builtBy(java.lang.Object[])` work with `TaskProvider` in the same way as `Task`, so you do not need to unwrap a `Provider` for explicit dependencies to continue to work.

If you are configuring a task by name, you will need to use the new API equivalent. See the table below to identify the new API alternative.

§

How to get an instance of a Task?

In the event you still need to get access to a Task instance, you can use `TaskCollection.named(java.lang.String)` and call `Provider.get()`. This will cause the task to be created/configured, but everything should work as it has with the eager APIs.

Please contact us if you find tricky build logic that requires you to get a Task instance.

§

How do I know if it's working?

We provide a couple of internal flags to print out information after a build. This will eventually be captured and displayed in an easier to digest form.

**gradle -Dorg.gradle.internal.tasks.stats help.**

```

Task counts: Old API 188, New API 587, total 775 # 1
Task counts: created 613, avoided 162, %-lazy 21 # 2

Task types that were created with the old API # 3
class org.gradle.api.DefaultTask 31
class org.jetbrains.kotlin.gradle.tasks.KotlinCompile 28
class org.gradle.api.tasks.JavaExec 24
class org.jlleitschuh.gradle.ktlint.KtlintCheck 24
class org.gradle.api.tasks.bundling.Jar 16
class org.gradle.kotlin.dsl.accessors.tasks.PrintAccessors 16
class org.gradle.plugin.devel.tasks.ValidateTaskProperties 15
class org.gradle.another.CoolTask 13
class org.gradle.plugin.devel.tasks.GeneratePluginDescriptors 10
class org.gradle.plugin.devel.tasks.PluginUnderTestMetadata 10
class org.gradle.kotlin.dsl.accessors.tasks.UpdateProjectSchema 1

Task types that were registered with the new API but were created anyways # 4
class org.gradle.api.DefaultTask 142
class org.gradle.api.tasks.Delete 106
class org.gradle.api.tasks.compile.JavaCompile 32
class org.gradle.language.jvm.tasks.ProcessResources 32
class org.gradle.api.tasks.testing.Test 16
class org.gradle.api.tasks.javadoc.Javadoc 16
class org.gradle.plugins.ide.idea.GenerateIdeaModule 15
class org.gradle.plugins.ide.eclipse.GenerateEclipseClasspath 15
class org.gradle.plugins.ide.eclipse.GenerateEclipseJdt 15
class org.gradle.plugins.ide.eclipse.GenerateEclipseProject 15
class org.gradle.api.tasks.compile.GroovyCompile 10
class org.gradle.api.tasks.javadoc.Groovydoc 5
class org.gradle.api.plugins.quality.Checkstyle 4
class org.gradle.api.plugins.quality.CodeNarc 2

```

188 tasks are created with the old API and 587 tasks are registered with the new API for a total of 775 tasks.

613 tasks were created and configured and only 162 tasks were avoided (never created or configured). 21% of all tasks were avoided (higher is better).

Lists of the type of tasks that were created with the old API. This is a good list to work down to increase the amount of possible avoidable task configuration.

Lists of the type of tasks that were created with the new API but were created/configured anyways. This is a good list to work down to increase the amount of task configuration that is avoided.

These statistics are printed out once per build. Projects with buildSrc and composite builds will display this information multiple times. In a build that uses the new APIs perfectly, we should see 0 tasks created with the old API and only 1 created/configured task because we are only executing the `help` task. If you run other tasks (like `build`), you should expect many more tasks to be created and configured.

You can use the list of task types to guide which tasks would provide the biggest bang for your buck when



you migrate to the new API.

To approximate the time it takes to configure a build without executing tasks, you can run `gradle help`. Please use the Gradle Profiler to measure your build as described in the section called “Profiling with a Gradle Profiler Scenario File”.

§

## Migration Guide

The following sections will go through some general guidelines to adhere when migrating the build logic as well as the steps we recommend following. We also cover some troubleshooting and pitfalls to help you work around some issues you may encountered during the migration.

§

### General

**Use `help` task as a benchmark during the migration.** The `help` task is the perfect candidate to benchmark your migration process. In a completely lazy build, a build scan should show no task created immediately or created during configuration. Only a single task, the `help` task, should be created during task graph calculation. Be mindful of the pitfall around the lazy API usage in the build scan plugin.

**Only mutate the current task inside configuration action.** Because the task configuration action can now run immediately, later or never, mutating anything other than the current task will expose flaky-like behavior in your build. In the future, Gradle will consider these flaky-mutations as failures. It also means the configuration needs to flow from the extensions to the tasks. Thus, the task should be configured by the extension and not the other way around.

**Prefer small incremental changes.** Smaller changes are easier to sanity check. If you ever break your build logic, it will be easier to analyze the changelog since the last successful verification.

**Ensure a good plan is established for validating the build logic.** Usually, a simple `build` task invocation should do the trick to validate all corner of your build logic. However, if all automation aspect is centralized around Gradle, you may need to validate other task execution path.

**Prefer automatic testing to manual testing.** It's good practice to write integration test for your build logic using TestKit.

**Avoid referencing a task by name.** In the majority of the case, referencing a task by name is a fragile pattern and should be avoided. Although task name is available on the `TaskProvider`, effort should be made to use references from a strongly typed model instead.

**Use the lazy task API as much as possible.** Although realizing a task within a lazy configuration action may not have any immediate impact, it makes misuse of the lazy API more costly. The lazy task API is an opt-in feature, meaning someone may be realizing task eagerly which would cause the realization to realize other tasks transitively. Using `TaskProvider` helps create an indirection that protects transitive realization.

## Migration Steps

The first part of the migration process is to go through the code and manually migrate eager task creation and configuration to use lazy APIs. The following explores the recommended steps for a successful migration. While going through those steps, keep in mind the guidelines.

**Migrate task configuration that affects all tasks (`tasks.all {}`) or subsets by type (`tasks.withType()`).** This will cause your build to create fewer built-in Gradle task types. Note that despite some built-in Gradle tasks aren't using the lazy APIs, the configuration affecting those task type should still be migrated. We recommend using regex code search capability offered by modern IDE. For example, the IntelliJ regex `\.all` will identify every call to `.all` of a `DomainObjectCollection` and subtype. We will need to go through those result and identify and migrate only the method calls affecting the `TaskContainer` or `TaskCollection`. Be aware of the common pitfall around deferred configuration.

**Migrate tasks configured by name.** Just like the previous point, it will cause your build to create fewer built-in Gradle tasks. For example, logic that uses `TaskContainer#getName(String, Closure/Action)` would be converted to `TaskContainer#named(String).configure(Closure/Action)`. It also include task configuration as DSL blocks. Be aware of the common pitfall around deferred configuration.

**Migrate tasks creation to `register(...)`.** It will cause your build to create fewer tasks in general. Be aware of the common pitfall around deferred configuration.

At this point, we should see a decent improvement regarding build configuration. We recommend profiling your build and note the improvement. Under some circumstance, you may notice no improvement. It's unfortunate, and we feel your frustration. Keep reading onto the next section.

§

## Troubleshooting

**The build became unstable after migrating to lazy task configuration.** It's a common issue that happens during the migration. Follow these next steps to find out the issue:

Is the build succeed when all tasks are eagerly resolved on creation using the command line flag (`-Dorg.gradle`)? Verify that each task configuration only mutating the task.

Was there any build logic accidentally deleted? Verify your change log for disparity in the configuration that may have been deleted.


It may be a real issue. For example, the issue of `FileCollection` using `TaskProvider` was a real discrepancy found while migrating a build to lazy task API. As a rule of thumb, a `TaskProvider` should be accepted everywhere a `Task` instance is accepted.

**Where a task was resolved?** As we keep developing the feature, more reporting, and troubleshooting information will be made available to answer this question. In the meantime, build scan is the best way to answer this question. Follow these steps:

Create a build scan. Execute the Gradle command using the `--scan` flag.

Navigate to the configuration performance tab.

Figure 26. Navigate to configuration performance tab in build scan

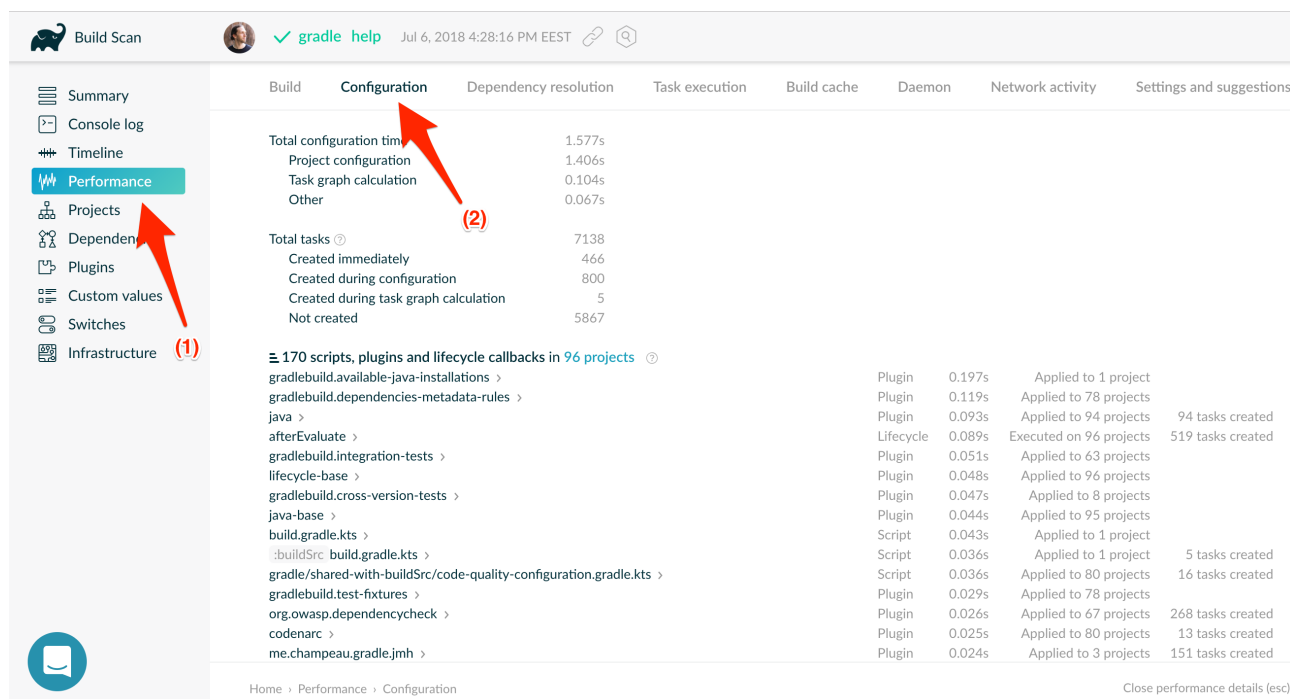


Navigate to the performance card from the left side menu.

Navigate to the configuration tab from the top of the performance card.

All the information requires will be presented.

Figure 27. Configuration performance tab in build scan annotated

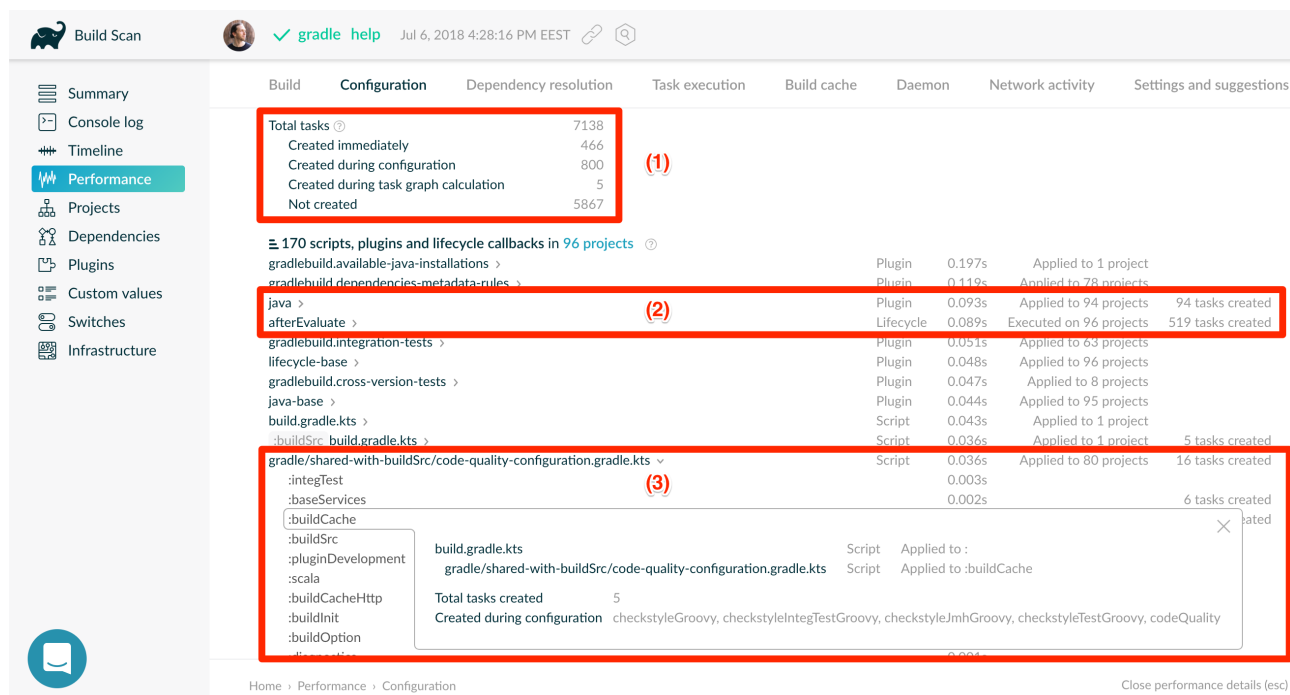

Total tasks present when each task are created or not.

Created immediately represent all the task created using the eager task APIs.

Created during configuration represent all the tasks that were created using the lazy task APIs, but was realized explicitly (via `TaskProvider#get()`) or implicitly using the eager task query APIs.

Both "Created immediately" and "Created during configuration" numbers are considered the "bad" numbers that should be minimized as much as possible.

Created during task graph calculation number represent all the task created while building the execution task graph. Typically, this number should be equal to the number of tasks that is executed.

Not created number represents all the tasks that were avoided in this build session.

The next section helps answer the question of where a task was realized. For each scripts, plugins and lifecycle callbacks, the last column represents the tasks that were created either immediately or during configuration. Ideally, this column should be empty. The migration should be focusing on the build logic under your control.

Extending any scripts, plugins, or lifecycle callbacks subsection shows a break down in which project it was applied.

**The build performance haven't improved after migrating to lazy API.** It is important to note that lazy task configuration is an opt-in feature. It means the entire configuration chain needs to be lazy to get the benefit. If at any point, an eager API is used for a specific named task, task type or, the worst, the entire task

container, all benefits are mitigated. The first step is to have a look at the statistics to see how much more the build can be improved. If the statistic shows the build is completely lazy (work-avoided) please contact us so we can discuss where this feature falls short and improve it for the next Gradle version.

§

## Pitfalls

**Lazy task configuration is an opt-in feature.** Any eager realization of a task will mitigate the benefit of this new API. In the far future, eager realizations will become an error, until then, it's up to the build author to avoid eager realization.

**Beware of the hidden eager task realization.** Gradle has lots of ways to configure a task eagerly. `TaskContainer.register` is an explicit configuration by name. Configuring a task as a DSL block is an alias to the previous explicit configuration, meaning a lazy task will be prematurely resolved:

```
// Given a task lazily created with
tasks.register "someTask"

// Some time later, the task is configured using a DSL block like
someTask {
    // The task is resolved immediately, and this closure is executed immediately
}
```

You will have to migrate the DSL task configuration to the following:

```
tasks.named("someTask").configure {
    // ...
    // Beware of the pitfalls here
}
```

While migrating to the lazy task configuration, you may still have eager task configuration that references a task by name using Groovy's property to task reference syntactic sugar. If this lookup is done from anything other than a lazy configuration action, the lazy task reference by the name will be prematurely realized:

```
tasks.register "someTask"

// Sometime later, an eager task is configured like
task aEagerTask {
    // The task is resolved immediately as it will be treated as a property of the task
    dependsOn someTask
}
```

You can solve the following in three ways:

**Use TaskProvider variable.** Useful when the task is referenced multiple time in the same build script.

```
def someTask = tasks.register "someTask"

task aEagerTask {
    dependsOn someTask
}
```

**Migrate consumer task.** It will only work under specific circumstances. If the task gets resolved later or the

realization may happen in a configuration action with no ways of actually knowing where the task is created or configured, this solution won't be helpful.

```
tasks.register "someTask"

tasks.register("aEagerTask") {
    dependsOn someTask
}
```

**Lookup the task lazily.** Useful when the task registration isn't co-located with its eager usage.

```
tasks.register "someTask"

task aEagerTask {
    dependsOn tasks.named("someTask")
}
```

**The jar task is eagerly realized, always.** The following issue is tracking this pitfall. Even though this issue wasn't released with Gradle 4.9, you should reference the `jar` task lazily.

**The build scan plugin `buildScanPublishPrevious` task is eager until version 1.15.** Upgrade the build scan plugin in your build to use the latest version.

§

## Old vs New API overview

- **Note:** Methods that take a `groovy.lang.Closure` are covered in the new API with methods taking `org.gradle.api.Action`.
- **Note:** More convenience methods may be added in the future based on user feedback.
- **Note:** Some old API methods may never have a direct replacement in the new API.

Old vs New API	Description
Instead of: <code>task myTask(type: MyTask) {}</code>	There is not a shorthand Groovy DSL for using the new API.
Use: <code>tasks.register("myTask", MyTask) {}</code>	
Instead of: <code>TaskContainer.create(java.util.Map)</code>	Use one of the alternatives below.
Use: No direct equivalent.	
Instead of: <code>TaskContainer.create(java.util.Map, groovy.lang.Closure)</code>	Use one of the alternatives below.

Use: No direct equivalent.	
Instead of: <code>TaskContainer.create(java.lang.String)</code>	This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>TaskContainer.register(java.lang.String)</code>	
Instead of: <code>TaskContainer.create(java.lang.String, groovy.lang.Closure)</code>	This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>TaskContainer.register(java.lang.String, org.gradle.api.Action)</code>	
Instead of: <code>TaskContainer.create(java.lang.String, java.lang.Class)</code>	This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>TaskContainer.register(java.lang.String, java.lang.Class)</code>	
Instead of: <code>TaskContainer.create(java.lang.String, java.lang.Class, org.gradle.api.Action)</code>	This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>TaskContainer.register(java.lang.String, java.lang.Class, org.gradle.api.Action)</code>	
Instead of: <code>TaskContainer.create(java.lang.String, java.lang.Class, java.lang.Object[])</code>	This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>TaskContainer.register(java.lang.String, java.lang.Class, java.lang.Object[])</code>	
Instead of: <code>TaskCollection.getByName(java.lang.String)</code>	This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>TaskCollection.named(java.lang.String)</code>	
Instead of: <code>TaskCollection.getByName(java.lang.String, groovy.lang.Closure)</code>	This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>named(java.lang.String).configure(Action)</code>	
Instead of: <code>TaskContainer.getByPath(java.lang.String)</code>	Accessing tasks from another project requires a specific ordering of project evaluation.
Use: No direct equivalent.	



Instead of:	of:	<code>named(String)</code> is the closest equivalent, but will fail if the task does not exist. Using <code>findByName(String)</code> will cause tasks registered with the new API to be created/configured.
<code>NamedDomainObjectCollection.findByName(java.lang.String)</code>		
Use: No direct equivalent.		
Instead of: <code>TaskContainer.findByPath(java.lang.String)</code>		See <code>getByPath(String)</code> above.
Use: No direct equivalent.		
Instead of: <code>TaskCollection.withType(java.lang.Class)</code>		This is OK to use because it does not require tasks to be created immediately.
Use: OK		
Instead of: <code>withType(java.lang.Class).getByName(java.lang.String)</code>		This returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>withType(java.lang.Class).named(java.lang.String)</code>		
Instead of: <code>DomainObjectCollection.withType(java.lang.Class, org.gradle.api.Action)</code>		This returns void, so it cannot be chained.
Use: <code>withType(java.lang.Class).configureEach(org.gradle.api.Action)</code>		
Instead of: <code>DomainObjectCollection.all(org.gradle.api.Action)</code>		This returns void, so it cannot be chained.
Use:		
<code>DomainObjectCollection.configureEach(org.gradle.api.Action)</code>		
Instead of: <code>NamedDomainObjectSet.findAll(groovy.lang.Closure)</code>		Avoid calling this method. <code>matching(Spec)</code> and <code>configureEach(Action)</code> are more appropriate in most cases.
Use: OK, with issues.		
Instead of: <code>TaskCollection.matching(groovy.lang.Closure)</code>		This is OK to use because it does not require tasks to be created immediately.
Use: OK		
Instead of: <code>TaskCollection.getAt(java.lang.String)</code>		Avoid calling this directly as it's a Groovy convenience method. The alternative returns a <code>TaskProvider</code> instead of a <code>Task</code> .
Use: <code>TaskCollection.named(java.lang.String)</code>		
Instead of: <code>iterator()</code> or implicit iteration over the <code>Task</code> collection		Avoid doing this as it requires creating and configuring all tasks. See <code>findAll(Closure)</code>

Use: <i>OK</i> , with issues.	above.
Instead of: <code>remove(org.gradle.api.Task)</code>	Avoid calling this. The behavior of <code>remove</code> with the new API may change in the future.
Use: <i>OK</i> , with issues.	
Instead of: <code>TaskContainer.replace(java.lang.String)</code>	Avoid calling this. The behavior of <code>replace</code> with the new API may change in the future.
Use: <i>OK</i> , with issues.	
Instead of: <code>TaskContainer.replace(java.lang.String, java.lang.Class)</code>	Avoid calling this. The behavior of <code>replace</code> with the new API may change in the future.
Use: <i>OK</i> , with issues.	

§

## Profiling with a Gradle Profiler Scenario File

The Gradle Profiler is a tool to measure build times for Gradle builds in a predictable and reproducible manner. The tool automates collecting profiling and benchmark information from a Gradle build and mitigates environmental impacts to measuring build time (like JIT warmups and cached dependencies). Clone and build `gradle-profiler` locally.

To measure the impact of the new API on your build, we've included a sample scenario file you can use. This scenario runs `gradle help` on your build with a special flag to enable/disable the new API to make it easier to measure improvements. `gradle help` approximates the time it takes Gradle to configure your build by running only a single, simple task.

### Save as `help.scenario`.

```
defaults {
    tasks = ["help"]
    warm-ups = 20
}
eagerHelp = ${defaults} {
    gradle-args = ["-Dorg.gradle.internal.tasks.eager=true"]
}
lazyHelp = ${defaults} {
    gradle-args = ["-Dorg.gradle.internal.tasks.eager=false"]
}
```

Run `gradle-profiler` in the root of your build. The results will go into a file called `profile-out-N` where `N` is unique for each invocation.

When measuring your build with `gradle-profiler`, you should make sure the machine running the

benchmark is not also busy doing other things. You may get false positives/negatives if resources are spent doing other things.

Get a baseline for how long your build takes before making any changes. Run

```
gradle-profiler --benchmark
  --iterations 20
  --gradle-version [some Gradle version]
  --scenario-file help.scenario
  eagerHelp lazyHelp
```

In the `profile-out-N` directory, `gradle-profiler` will generate a CSV and a HTML file to display the results of the benchmarking.

After making some changes to decrease the number of tasks that are created and configured, re-run the command above.

For the Gradle build itself, we saw improvements after 50% of the tasks were no longer configured each time. Your mileage may vary depending on how expensive particular tasks are to create and configure.

Please provide feedback on this issue. Or send us an email at [performance@gradle.com](mailto:performance@gradle.com).

# Initialization Scripts

Gradle provides a powerful mechanism to allow customizing the build based on the current environment. This mechanism also supports tools that wish to integrate with Gradle.

Note that this is completely different from the `init` task provided by the `build-init` incubating plugin (see *Build Init Plugin*).

§

## Basic usage

Initialization scripts (a.k.a. *init scripts*) are similar to other scripts in Gradle. These scripts, however, are run before the build starts. Here are several possible uses:

Set up enterprise-wide configuration, such as where to find custom plugins.

Set up properties based on the current environment, such as a developer's machine vs. a continuous integration server.

Supply personal information about the user that is required by the build, such as repository or database authentication credentials.

Define machine specific details, such as where JDKs are installed.

Register build listeners. External tools that wish to listen to Gradle events might find this useful.

Register build loggers. You might wish to customize how Gradle logs the events that it generates.

One main limitation of init scripts is that they cannot access classes in the `buildSrc` project (see the section called “Use `buildSrc` to abstract imperative logic” for details of this feature).

§

## Using an init script

There are several ways to use an init script:

Specify a file on the command line. The command line option is `-I` or `--init-script` followed by the path to the script. The command line option can appear more than once, each time adding another init script. The build will fail if any of the files specified on the command line does not exist.

Put a file called `init.gradle` in the `USER_HOME/.gradle/` directory.

Put a file that ends with `.gradle` in the `USER_HOME/.gradle/init.d/` directory.

Put a file that ends with `.gradle` in the `GRADLE_HOME/init.d/` directory, in the Gradle distribution. This allows you to package up a custom Gradle distribution containing some custom build logic and plugins. You can combine this with the Gradle wrapper as a way to make custom logic available to all builds in your enterprise.

If more than one init script is found they will all be executed, in the order specified above. Scripts in a given directory are executed in alphabetical order. This allows, for example, a tool to specify an init script on the command line and the user to put one in their home directory for defining the environment and both scripts will run when Gradle is executed.

§

## Writing an init script

Similar to a Gradle build script, an init script is a Groovy script. Each init script has a `Gradle` instance associated with it. Any property reference and method call in the init script will delegate to this `Gradle` instance.

Each init script also implements the `Script` interface.

§

## Configuring projects from an init script

You can use an init script to configure the projects in the build. This works in a similar way to configuring projects in a multi-project build. The following sample shows how to perform extra configuration from an init script *before* the projects are evaluated. This sample uses this feature to configure an extra repository to be used only for certain environments.

#### Example 400. Using init script to perform extra configuration before projects are evaluated

##### **build.gradle**

```
repositories {
    mavenCentral()
}

task showRepos {
    doLast {
        println "All repos:"
        println repositories.collect { it.name }
    }
}
```

##### **init.gradle**

```
allprojects {
    repositories {
        mavenLocal()
    }
}
```

#### Output of `gradle --init-script init.gradle -q showRepos`

```
> gradle --init-script init.gradle -q showRepos
All repos:
[MavenLocal, MavenRepo]
```

## §

### External dependencies for the init script

In the section called “External dependencies for the build script” it was explained how to add external dependencies to a build script. Init scripts can also declare dependencies. You do this with the `initscript` method, passing in a closure which declares the init script classpath.

#### Example 401. Declaring external dependencies for an init script

##### **init.gradle**

```
initscript {
    repositories {
        mavenCentral()
    }
    dependencies {
        classpath group: 'org.apache.commons', name: 'commons-math', version: '2'
    }
}
```

The closure passed to the `initscript()` method configures a [ScriptHandler](#) instance. You declare the

init script classpath by adding dependencies to the `classpath` configuration. This is the same way you declare, for example, the Java compilation classpath. You can use any of the dependency types described in *Declaring Dependencies*, except project dependencies.

Having declared the init script classpath, you can use the classes in your init script as you would any other classes on the classpath. The following example adds to the previous example, and uses classes from the init script classpath.

#### Example 402. An init script with external dependencies

##### **init.gradle**

```
import org.apache.commons.math.fraction.Fraction

initscript {
    repositories {
        mavenCentral()
    }
    dependencies {
        classpath group: 'org.apache.commons', name: 'commons-math', version: '2
    }
}

println Fraction.ONE_FIFTH.multiply(2)
```

##### Output of **gradle --init-script init.gradle -q doNothing**

```
> gradle --init-script init.gradle -q doNothing
2 / 5
```

## §

### Init script plugins

Similar to a Gradle build script or a Gradle settings file, plugins can be applied on init scripts.

#### Example 403. Using plugins in init scripts

## init.gradle

```
apply plugin:EnterpriseRepositoryPlugin

class EnterpriseRepositoryPlugin implements Plugin<Gradle> {

    private static String ENTERPRISE_REPOSITORY_URL = "https://repo.gradle.org/g

    void apply(Gradle gradle) {
        // ONLY USE ENTERPRISE REPO FOR DEPENDENCIES
        gradle.allprojects{ project ->
            project.repositories {

                // Remove all repositories not pointing to the enterprise reposi
                all { ArtifactRepository repo ->
                    if (!(repo instanceof MavenArtifactRepository) ||
                        repo.url.toString() != ENTERPRISE_REPOSITORY_URL) {
                        project.logger.lifecycle "Repository ${repo.url} removed
                        remove repo
                    }
                }

                // add the enterprise repository
                maven {
                    name "STANDARD_ENTERPRISE_REPO"
                    url ENTERPRISE_REPOSITORY_URL
                }
            }
        }
    }
}
```

## build.gradle

```
repositories{
    mavenCentral()
}

task showRepositories {
    doLast {
        repositories.each {
            println "repository: ${it.name} ('${it.url}')"
        }
    }
}
```

## Output of `gradle -q -I init.gradle showRepositories`

```
> gradle -q -I init.gradle showRepositories
repository: STANDARD_ENTERPRISE_REPO ('https://repo.gradle.org/gradle/repo')
```



The plugin in the init script ensures that only a specified repository is used when running the build.

When applying plugins within the init script, Gradle instantiates the plugin and calls the plugin instance's `Plugin.apply(T)` method. The `gradle` object is passed as a parameter, which can be used to configure all aspects of a build. Of course, the applied plugin can be resolved as an external dependency as described in the section called “External dependencies for the init script”

# Testing Build Logic with TestKit

The Gradle TestKit (a.k.a. just TestKit) is a library that aids in testing Gradle plugins and build logic generally. At this time, it is focused on *functional* testing. That is, testing build logic by exercising it as part of a programmatically executed build. Over time, the TestKit will likely expand to facilitate other kinds of tests.

§

## Usage

To use the TestKit, include the following in your plugin's build:

### Example 404. Declaring the TestKit dependency

```
build.gradle
dependencies {
    testCompile gradleTestKit()
}
```

The `gradleTestKit()` encompasses the classes of the TestKit, as well as the Gradle Tooling API client. It does not include a version of JUnit, TestNG, or any other test execution framework. Such a dependency must be explicitly declared.

### Example 405. Declaring the JUnit dependency

```
build.gradle
dependencies {
    testCompile 'junit:junit:4.12'
}
```

§

## Functional testing with the Gradle runner

The [GradleRunner](#) facilitates programmatically executing Gradle builds, and inspecting the result.

A contrived build can be created (e.g. programmatically, or from a template) that exercises the “logic under test”. The build can then be executed, potentially in a variety of ways (e.g. different combinations of tasks and arguments). The correctness of the logic can then be verified by asserting the following, potentially in combination:

The build's output;

The build's logging (i.e. console output);

The set of tasks executed by the build and their results (e.g. FAILED, UP-TO-DATE etc.).

After creating and configuring a runner instance, the build can be executed via the `GradleRunner.build()` or `GradleRunner.buildAndFail()` methods depending on the anticipated outcome.

The following demonstrates the usage of Gradle runner in a Java JUnit test:

#### Example 406. Using GradleRunner with JUnit

##### BuildLogicFunctionalTest.java

```
import org.gradle.testkit.runner.BuildResult;
import org.gradle.testkit.runner.GradleRunner;
import org.junit.Before;
import org.junit.Rule;
import org.junit.Test;
import org.junit.rules.TemporaryFolder;

import java.io.BufferedWriter;
import java.io.File;
import java.io.FileWriter;
import java.io.IOException;
import java.util.Collections;

import static org.junit.Assert.assertEquals;
import static org.junit.Assert.assertTrue;

import static org.gradle.testkit.runner.TaskOutcome.*;

public class BuildLogicFunctionalTest {
    @Rule public final TemporaryFolder testProjectDir = new TemporaryFolder();
    private File buildFile;

    @Before
    public void setup() throws IOException {
        buildFile = testProjectDir.newFile("build.gradle");
    }

    @Test
    public void testHelloWorldTask() throws IOException {
        String buildFileContent = "task helloWorld {" +
            "    doLast {" +
            "        println 'Hello world!'" +
            "    }" +
            "}";
        writeFile(buildFile, buildFileContent);
    }
}
```

```

BuildResult result = GradleRunner.create()
    .withProjectDir(testProjectDir.getRoot())
    .withArguments("helloWorld")
    .build();

assertTrue(result.getOutput().contains("Hello world!"));
assertEquals(SUCCESS, result.task(":helloWorld").getOutcome());
}

private void writeFile(File destination, String content) throws IOException
    BufferedWriter output = null;
    try {
        output = new BufferedWriter(new FileWriter(destination));
        output.write(content);
    } finally {
        if (output != null) {
            output.close();
        }
    }
}

```

```
}  
}
```

Any test execution framework can be used.

As Gradle build scripts are written in the Groovy programming language, and as many plugins are implemented in Groovy, it is often a productive choice to write Gradle functional tests in Groovy. Furthermore, it is recommended to use the (Groovy based) Spock test execution framework as it offers many compelling features over the use of JUnit.

The following demonstrates the usage of Gradle runner in a Groovy Spock test:

### Example 407. Using GradleRunner with Spock

#### BuildLogicFunctionalTest.groovy

```
import org.gradle.testkit.runner.GradleRunner
import static org.gradle.testkit.runner.TaskOutcome.*
import org.junit.Rule
import org.junit.rules.TemporaryFolder
import spock.lang.Specification

class BuildLogicFunctionalTest extends Specification {
    @Rule final TemporaryFolder testProjectDir = new TemporaryFolder()
    File buildFile

    def setup() {
        buildFile = testProjectDir.newFile('build.gradle')
    }

    def "hello world task prints hello world"() {
        given:
        buildFile << """
            task helloWorld {
                doLast {
                    println 'Hello world!'
                }
            }
        """

        when:
        def result = GradleRunner.create()
            .withProjectDir(testProjectDir.root)
            .withArguments('helloWorld')
            .build()

        then:
        result.output.contains('Hello world!')
        result.task(":helloWorld").outcome == SUCCESS
    }
}
```

It is a common practice to implement any custom build logic (like plugins and task types) that is more complex in nature as external classes in a standalone project. The main driver behind this approach is bundle the compiled code into a JAR file, publish it to a binary repository and reuse it across various projects.

## Getting the plugin-under-test into the test build

The GradleRunner uses the Tooling API to execute builds. An implication of this is that the builds are executed in a separate process (i.e. not the same process executing the tests). Therefore, the test build does not share the same classpath or classloaders as the test process and the code under test is not implicitly available to the test build.

Starting with version 2.13, Gradle provides a conventional mechanism to inject the code under test into the test build.

For earlier versions of Gradle (before 2.13), it is possible to manually make the code under test available via some extra configuration. The following example demonstrates having the build generate a file containing the implementation classpath of the code under test, and making it available at test runtime.

### Example 408. Making the code under test classpath available to the tests

#### build.gradle

```
// Write the plugin's classpath to a file to share with the tests
task createClasspathManifest {
    def outputDir = file("$buildDir/$name")

    inputs.files sourceSets.main.runtimeClasspath
    outputs.dir outputDir

    doLast {
        outputDir.mkdirs()
        file("$outputDir/plugin-classpath.txt").text = sourceSets.main.runtimeClasspath
    }
}

// Add the classpath file to the test runtime classpath
dependencies {
    testRuntime files(createClasspathManifest)
}
```

**Note:** The code for this example can be found at `samples/testKit/gradleRunner/manualClasspath` in the ‘-all’ distribution of Gradle.

The tests can then read this value, and inject the classpath into the test build by using the method `GradleRunner.withPluginClasspath(java.lang.Iterable)`. This classpath is then available to use to locate plugins in a test build via the plugins DSL (see *Using Gradle Plugins*). Applying plugins with the plugins DSL requires the definition of a plugin identifier. The following is an example (in Groovy) of doing this from within a Spock Framework `setup()` method, which is analogous to a JUnit `@Before` method.

#### Example 409. Injecting the code under test classes into test builds

`src/test/groovy/org/gradle/sample/BuildLogicFunctionalTest.groovy`

```
List<File> pluginClasspath
```

```
def setup() {
    buildFile = testProjectDir.newFile('build.gradle')

    def pluginClasspathResource = getClass().classLoader.findResource("plugin-classpath.txt")
    if (pluginClasspathResource == null) {
        throw new IllegalStateException("Did not find plugin classpath resource,")
    }

    pluginClasspath = pluginClasspathResource.readLines().collect { new File(it) }
}

def "hello world task prints hello world"() {
    given:
    buildFile << """
        plugins {
            id 'org.gradle.sample.helloworld'
        }
    """

    when:
    def result = GradleRunner.create()
        .withProjectDir(testProjectDir.root)
        .withArguments('helloWorld')
        .withPluginClasspath(pluginClasspath)
        .build()

    then:
    result.output.contains('Hello world!')
    result.task(":helloWorld").outcome == SUCCESS
}
```

**Note:** The code for this example can be found at `samples/testKit/gradleRunner/manualClasspath` in the ‘-all’ distribution of Gradle.

This approach works well when executing the functional tests as part of the Gradle build. When executing the functional tests from an IDE, there are extra considerations. Namely, the classpath manifest file points to the class files etc. generated by Gradle and not the IDE. This means that after making a change to the source of the code under test, the source must be recompiled by Gradle. Similarly, if the effective classpath of the code under test changes, the manifest must be regenerated. In either case, executing the `testClasses` task of the build will ensure that things are up to date.

Some IDEs provide a convenience option to delegate the "test classpath generation and execution" to the build. In IntelliJ you can find this option under Preferences... > Build, Execution, Deployment > Build Tools >



Gradle > Runner > Delegate IDE build/run actions to gradle. Please consult the documentation of your IDE for more information.

§

## Working with Gradle versions prior to 2.8

The `GradleRunner.withPluginClasspath(java.lang.Iterable)` method will not work when executing the build with a Gradle version earlier than 2.8 (see:the section called “The Gradle version used to test”), as this feature is not supported on such Gradle versions.

Instead, the code must be injected via the build script itself. The following sample demonstrates how this can be done.

#### Example 410. Injecting the code under test classes into test builds for Gradle versions prior to 2.8

`src/test/groovy/org/gradle/sample/BuildLogicFunctionalTest.groovy`

```
List<File> pluginClasspath

def setup() {
    buildFile = testProjectDir.newFile('build.gradle')

    def pluginClasspathResource = getClass().classLoader.findResource("plugin-classpath.txt")
    if (pluginClasspathResource == null) {
        throw new IllegalStateException("Did not find plugin classpath resource, please see the README")
    }

    pluginClasspath = pluginClasspathResource.readLines().collect { new File(it) }
}

def "hello world task prints hello world with pre Gradle 2.8"() {
    given:
    def classpathString = pluginClasspath
        .collect { it.absolutePath.replace('\\', '\\\\') } // escape backslashes
        .collect { "'$it'" }
        .join(", ")

    buildFile << """
        buildscript {
            dependencies {
                classpath files($classpathString)
            }
        }
        apply plugin: "org.gradle.sample.helloworld"
    """

    when:
    def result = GradleRunner.create()
        .withProjectDir(testProjectDir.root)
        .withArguments('helloWorld')
        .withGradleVersion("2.7")
        .build()

    then:
    result.output.contains('Hello world!')
    result.task(":helloWorld").outcome == SUCCESS
}
```

**Note:** The code for this example can be found at `samples/testKit/gradleRunner/manualClass` in the ‘-all’ distribution of Gradle.

§

## Automatic injection with the Java Gradle Plugin Development plugin

The Java Gradle Plugin development plugin can be used to assist in the development of Gradle plugins. Starting with Gradle version 2.13, the plugin provides a direct integration with TestKit. When applied to a project, the plugin automatically adds the `gradleTestKit()` dependency to the test compile configuration. Furthermore, it automatically generates the classpath for the code under test and injects it via `GradleRunner.withPluginClasspath()` for any `GradleRunner` instance created by the user. It's important to note that the mechanism currently *only* works if the plugin under test is applied using the plugins DSL. If the target Gradle version is prior to 2.8, automatic plugin classpath injection is not performed.

The plugin uses the following conventions for applying the TestKit dependency and injecting the classpath:

Source set containing code under test: `sourceSets.main`

Source set used for injecting the plugin classpath: `sourceSets.test`

Any of these conventions can be reconfigured with the help of the class `GradlePluginDevelopmentExtension`.

The following Groovy-based sample demonstrates how to automatically inject the plugin classpath by using the standard conventions applied by the Java Gradle Plugin Development plugin.

### Example 411. Using the Java Gradle Development plugin for generating the plugin metadata

#### **build.gradle**

```
apply plugin: 'groovy'
apply plugin: 'java-gradle-plugin'

dependencies {
    testCompile('org.spockframework:spock-core:1.0-groovy-2.4') {
        exclude module: 'groovy-all'
    }
}
```

**Note:** The code for this example can be found at `samples/testKit/gradleRunner/automaticCI` in the '-all' distribution of Gradle.

#### Example 412. Automatically injecting the code under test classes into test builds

```
src/test/groovy/org/gradle/sample/BuildLogicFunctionalTest.groovy
def "hello world task prints hello world"() {
    given:
    buildFile << """
        plugins {
            id 'org.gradle.sample.helloworld'
        }
    """

    when:
    def result = GradleRunner.create()
        .withProjectDir(testProjectDir.root)
        .withArguments('helloWorld')
        .withPluginClasspath()
        .build()

    then:
    result.output.contains('Hello world!')
    result.task(":helloWorld").outcome == SUCCESS
}
```

**Note:** The code for this example can be found at `samples/testKit/gradleRunner/automaticCI` in the '-all' distribution of Gradle.

The following build script demonstrates how to reconfigure the conventions provided by the Java Gradle Plugin Development plugin for a project that uses a custom `Test` source set.

#### Example 413. Reconfiguring the classpath generation conventions of the Java Gradle Development pl

##### build.gradle

```
apply plugin: 'groovy'
apply plugin: 'java-gradle-plugin'

sourceSets {
    functionalTest {
        groovy {
            srcDir file('src/functionalTest/groovy')
        }
        resources {
            srcDir file('src/functionalTest/resources')
        }
        compileClasspath += sourceSets.main.output + configurations.testRuntime
        runtimeClasspath += output + compileClasspath
    }
}

task functionalTest(type: Test) {
    testClassesDirs = sourceSets.functionalTest.output.classesDirs
    classpath = sourceSets.functionalTest.runtimeClasspath
}

check.dependsOn functionalTest

gradlePlugin {
    testSourceSets sourceSets.functionalTest
}

dependencies {
    functionalTestCompile('org.spockframework:spock-core:1.0-groovy-2.4') {
        exclude module: 'groovy-all'
    }
}
```

**Note:** The code for this example can be found at `samples/testKit/gradleRunner/automaticCI` in the ‘-all’ distribution of Gradle.

## §

### Controlling the build environment

The runner executes the test builds in an isolated environment by specifying a dedicated "working directory" in a directory inside the JVM's temp directory (i.e. the location specified by the `java.io.tmpdir` system property, typically `/tmp`). Any configuration in the default Gradle user home directory (e.g. `~/.gradle/gradle`) is not used for test execution. The TestKit does not expose a mechanism for fine grained control of environment variables etc. Future versions of the TestKit will provide improved configuration options.

The TestKit uses dedicated daemon processes that are automatically shut down after test execution.

## §

### The Gradle version used to test

The Gradle runner requires a Gradle distribution in order to execute the build. The TestKit does not depend on all of Gradle's implementation.

By default, the runner will attempt to find a Gradle distribution based on where the `GradleRunner` class was loaded from. That is, it is expected that the class was loaded from a Gradle distribution, as is the case when using the `gradleTestKit()` dependency declaration.

When using the runner as part of tests *being executed by Gradle* (e.g. executing the `test` task of a plugin project), the same distribution used to execute the tests will be used by the runner. When using the runner as part of tests *being executed by an IDE*, the same distribution of Gradle that was used when importing the project will be used. This means that the plugin will effectively be tested with the same version of Gradle that it is being built with.

Alternatively, a different and specific version of Gradle to use can be specified by the any of the following `GradleRunner` methods:

```
GradleRunner.withGradleVersion(java.lang.String)
```

```
GradleRunner.withGradleInstallation(java.io.File)
```

```
GradleRunner.withGradleDistribution(java.net.URI)
```

This can potentially be used to test build logic across Gradle versions. The following demonstrates a cross-version compatibility test written as Groovy Spock test:

#### Example 414. Specifying a Gradle version for test execution

##### BuildLogicFunctionalTest.groovy

```
import org.gradle.testkit.runner.GradleRunner
import static org.gradle.testkit.runner.TaskOutcome.*
import org.junit.Rule
import org.junit.rules.TemporaryFolder
import spock.lang.Specification
import spock.lang.Unroll

class BuildLogicFunctionalTest extends Specification {
    @Rule final TemporaryFolder testProjectDir = new TemporaryFolder()
    File buildFile

    def setup() {
        buildFile = testProjectDir.newFile('build.gradle')
    }

    @Unroll
    def "can execute hello world task with Gradle version #gradleVersion"() {
        given:
        buildFile << """
            task helloWorld {
                doLast {
                    logger.quiet 'Hello world!'
                }
            }
        """

        when:
        def result = GradleRunner.create()
            .withGradleVersion(gradleVersion)
            .withProjectDir(testProjectDir.root)
            .withArguments('helloWorld')
            .build()

        then:
        result.output.contains('Hello world!')
        result.task(":helloWorld").outcome == SUCCESS

        where:
        gradleVersion << ['2.6', '2.7']
    }
}
```

§

## Feature support when testing with different Gradle versions

It is possible to use the `GradleRunner` to execute builds with Gradle 1.0 and later. However, some runner features are not supported on earlier versions. In such cases, the runner will throw an exception when attempting to use the feature.

The following table lists the features that are sensitive to the Gradle version being used.

**Table 28. Gradle version compatibility**

Feature	Minimum Version	Description
Inspecting executed tasks	2.5	Inspecting the executed tasks, using <code>BuildResult.getTasks()</code> and similar methods.
Plugin classpath injection	2.8	Injecting the code under test via <code>GradleRunner.withPluginClasspath(java.lang.Iterable)</code> .
Inspecting build output in debug mode	2.9	Inspecting the build's text output when run in debug mode, using <code>BuildResult.getOutput()</code> .
Automatic plugin classpath injection	2.13	Injecting the code under test automatically via <code>GradleRunner.withPluginClasspath()</code> by applying the Java Gradle Plugin Development plugin.

§

## Debugging build logic

The runner uses the Tooling API to execute builds. An implication of this is that the builds are executed in a separate process (i.e. not the same process executing the tests). Therefore, executing your *tests* in debug mode does not allow you to debug your build logic as you may expect. Any breakpoints set in your IDE will not be tripped by the code being exercised by the test build.

The `TestKit` provides two different ways to enable the debug mode:

Setting “`org.gradle.testkit.debug`” system property to `true` for the JVM *using* the `GradleRunner` (i.e. not the build being executed with the runner);

Calling the `GradleRunner.withDebug(boolean)` method.

The system property approach can be used when it is desirable to enable debugging support without making an adhoc change to the runner configuration. Most IDEs offer the capability to set JVM system properties for test execution, and such a feature can be used to set this system property.



## Testing with the Build Cache

To enable the Build Cache in your tests, you can pass the `--build-cache` argument to [GradleRunner](#) or use one of the other methods described in the section called “Enable the Build Cache”. You can then check for the task outcome `TaskOutcome.FROM_CACHE` when your plugin’s custom task is cached. This outcome is only valid for Gradle 3.5 and newer.

### Example 415. Testing cacheable tasks

#### BuildLogicFunctionalTest.groovy

```
def "cacheableTask is loaded from cache"() {
    given:
    buildFile << """
        plugins {
            id 'org.gradle.sample.helloworld'
        }
    """

    when:
    def result = runner()
        .withArguments( '--build-cache', 'cacheableTask' )
        .build()

    then:
    result.task(":cacheableTask").outcome == SUCCESS

    when:
    new File(testProjectDir.root, 'build').deleteDir()
    result = runner()
        .withArguments( '--build-cache', 'cacheableTask' )
        .build()

    then:
    result.task(":cacheableTask").outcome == FROM_CACHE
}
```

Note that `TestKit` re-uses a Gradle user home between tests (see [GradleRunner.withTestKitDir\(java.io.File\)](#)) which contains the default location for the local build cache. For testing with the build cache, the build cache directory should be cleaned between tests. The easiest way to accomplish this is to configure the local build cache to use a temporary directory.

#### Example 416. Clean build cache between tests

##### BuildLogicFunctionalTest.groovy

```
@Rule final TemporaryFolder testProjectDir = new TemporaryFolder()
File buildFile
File localBuildCacheDirectory

def setup() {
    localBuildCacheDirectory = testProjectDir.newFolder('local-cache')
    testProjectDir.newFile('settings.gradle') << """
        buildCache {
            local {
                directory '${localBuildCacheDirectory.toURI()}'
            }
        }
    """
    buildFile = testProjectDir.newFile('build.gradle')
}
```

# Building JVM projects

# Java Quickstart

## §

### The Java plugin

As we have seen, Gradle is a general-purpose build tool. It can build pretty much anything you care to implement in your build script. Out-of-the-box, however, it doesn't build anything unless you add code to your build script to do so.

Most Java projects are pretty similar as far as the basics go: you need to compile your Java source files, run some unit tests, and create a JAR file containing your classes. It would be nice if you didn't have to code all this up for every project. Luckily, you don't have to. Gradle solves this problem through the use of *plugins*. A plugin is an extension to Gradle which configures your project in some way, typically by adding some pre-configured tasks which together do something useful. Gradle ships with a number of plugins, and you can easily write your own and share them with others. One such plugin is the *Java plugin*. This plugin adds some tasks to your project which will compile and unit test your Java source code, and bundle it into a JAR file.

The Java plugin is convention based. This means that the plugin defines default values for many aspects of the project, such as where the Java source files are located. If you follow the convention in your project, you generally don't need to do much in your build script to get a useful build. Gradle allows you to customize your project if you don't want to or cannot follow the convention in some way. In fact, because support for Java projects is implemented as a plugin, you don't have to use the plugin at all to build a Java project, if you don't want to.

We have in-depth coverage with many examples about the Java plugin, dependency management and multi-project builds in later chapters. In this chapter we want to give you an initial idea of how to use the Java plugin to build a Java project.

## §

### A basic Java project

Let's look at a simple example. To use the Java plugin, add the following to your build file:

### Example 417. Using the Java plugin

#### **build.gradle**

```
apply plugin: 'java'
```

**Note:** The code for this example can be found at `samples/java/quickstart` in the ‘-all’ distribution of Gradle.

This is all you need to define a Java project. This will apply the Java plugin to your project, which adds a number of tasks to your project.

#### What tasks are available?

You can use `gradle tasks` to list the tasks of a project. This will let you see the tasks that the Java plugin has added to your project.

Gradle expects to find your production source code under `src/main/java` and your test source code under `src/test/java`. In addition, any files under `src/main/resources` will be included in the JAR file as resources, and any files under `src/test/resources` will be included in the classpath used to run the tests. All output files are created under the `build` directory, with the JAR file ending up in the `build/libs` directory.

§

### Building the project

The Java plugin adds quite a few tasks to your project. However, there are only a handful of tasks that you will need to use to build the project. The most commonly used task is the `build` task, which does a full build of the project. When you run `gradle build`, Gradle will compile and test your code, and create a JAR file containing your main classes and resources:

### Example 418. Building a Java project

#### Output of `gradle build`

```
> gradle build
> Task :compileJava
> Task :processResources
> Task :classes
> Task :jar
> Task :assemble
> Task :compileTestJava
> Task :processTestResources
> Task :testClasses
> Task :test
> Task :check
> Task :build
```

BUILD SUCCESSFUL in 0s

6 actionable tasks: 6 executed

Some other useful tasks are:

#### **clean**

Deletes the `build` directory, removing all built files.

#### **assemble**

Compiles and jars your code, but does not run the unit tests. Other plugins add more artifacts to this task. For example, if you use the War plugin, this task will also build the WAR file for your project.

#### **check**

Compiles and tests your code. Other plugins add more checks to this task. For example, if you use the `ch` plugin, this task will also run Checkstyle against your source code.

§

### External dependencies

Usually, a Java project will have some dependencies on external JAR files. To reference these JAR files in the project, you need to tell Gradle where to find them. In Gradle, artifacts such as JAR files, are located in a *repository*. A repository can be used for fetching the dependencies of a project, or for publishing the artifacts of a project, or both. For this example, we will use the public Maven repository:

#### **Example 419. Adding Maven repository**

##### **build.gradle**

```
repositories {  
    mavenCentral()  
}
```

Let's add some dependencies. Here, we will declare that our production classes have a compile-time dependency on commons collections, and that our test classes have a compile-time dependency on junit:

#### **Example 420. Adding dependencies**

##### **build.gradle**

```
dependencies {  
    compile group: 'commons-collections', name: 'commons-collections', version:  
    testCompile group: 'junit', name: 'junit', version: '4.+'  
}
```

You can find out more in *Dependency Management for Java Projects*.

§

## Customizing the project

The Java plugin adds a number of properties to your project. These properties have default values which are usually sufficient to get started. It's easy to change these values if they don't suit. Let's look at this for our sample. Here we will specify the version number for our Java project, along with some attributes to the JAR manifest.

### Example 421. Customization of MANIFEST.MF

```
build.gradle
version = '1.0'
jar {
    manifest {
        attributes 'Implementation-Title': 'Gradle Quickstart',
                  'Implementation-Version': version
    }
}
```

#### What properties are available?

You can use `gradle properties` to list the properties of a project. This will allow you to see the properties added by the Java plugin, and their default values.

The tasks which the Java plugin adds are regular tasks, exactly the same as if they were declared in the build file. This means you can use any of the mechanisms shown in earlier chapters to customize these tasks. For example, you can set the properties of a task, add behaviour to a task, change the dependencies of a task, or replace a task entirely. In our sample, we will configure the `test` task, which is of type `Test`, to add a system property when the tests are executed:

### Example 422. Adding a test system property

```
build.gradle
test {
    systemProperties 'property': 'value'
}
```

§

## Publishing the JAR file

Usually the JAR file needs to be published somewhere. To do this, you need to tell Gradle where to publish the JAR file. In Gradle, artifacts such as JAR files are published to repositories. In our sample, we will publish to a local directory. You can also publish to a remote location, or multiple locations.

#### Example 423. Publishing the JAR file

##### **build.gradle**

```
uploadArchives {  
    repositories {  
        flatDir {  
            dirs 'repos'  
        }  
    }  
}
```

To publish the JAR file, run `gradle uploadArchives`.

§

#### Creating an Eclipse project

To create the Eclipse-specific descriptor files, like `.project`, you need to add another plugin to your build file:

#### Example 424. Eclipse plugin

##### **build.gradle**

```
apply plugin: 'eclipse'
```

Now execute `gradle eclipse` command to generate Eclipse project files. More information about the `ecl:` task can be found in *The Eclipse Plugins*.

§

#### Summary

Here's the complete build file for our sample:



#### Example 425. Java example - complete build file

##### build.gradle

```
apply plugin: 'java'
apply plugin: 'eclipse'

version = '1.0'
jar {
    manifest {
        attributes 'Implementation-Title': 'Gradle Quickstart',
                  'Implementation-Version': version
    }
}

repositories {
    mavenCentral()
}

dependencies {
    compile group: 'commons-collections', name: 'commons-collections', version:
    testCompile group: 'junit', name: 'junit', version: '4.+'
}

test {
    systemProperties 'property': 'value'
}

uploadArchives {
    repositories {
        flatDir {
            dirs 'repos'
        }
    }
}
```

## §

### Multi-project Java build

Now let's look at a typical multi-project build. Below is the layout for the project:

## Example 426. Multi-project build - hierarchical layout

### Build layout

```
multiproject/  
  api/  
  services/webservice/  
  shared/  
  services/shared/
```

**Note:** The code for this example can be found at `samples/java/multiproject` in the ‘-all’ distribution of Gradle.

Here we have four projects. Project `api` produces a JAR file which is shipped to the client to provide them a Java client for your XML webservice. Project `webservice` is a webapp which returns XML. Project `shared` contains code used both by `api` and `webservice`. Project `services/shared` has code that depends on the `shared` project.

§

### Defining a multi-project build

To define a multi-project build, you need to create a *settings file*. The settings file lives in the root directory of the source tree, and specifies which projects to include in the build. It must be called `settings.gradle`. For this example, we are using a simple hierarchical layout. Here is the corresponding settings file:

## Example 427. Multi-project build - settings.gradle file

### settings.gradle

```
include "shared", "api", "services:webservice", "services:shared"
```

You can find out more about the settings file in *Authoring Multi-Project Builds*.

§

### Common configuration

For most multi-project builds, there is some configuration which is common to all projects. In our sample, we will define this common configuration in the root project, using a technique called *configuration injection*. Here, the root project is like a container and the `subprojects` method iterates over the elements of this container - the projects in this instance - and injects the specified configuration. This way we can easily define the manifest content for all archives, and some common dependencies:

### Example 428. Multi-project build - common configuration

#### build.gradle

```
subprojects {  
    apply plugin: 'java'  
    apply plugin: 'eclipse-wtp'  
  
    repositories {  
        mavenCentral()  
    }  
  
    dependencies {  
        testCompile 'junit:junit:4.12'  
    }  
  
    version = '1.0'  
  
    jar {  
        manifest.attributes provider: 'gradle'  
    }  
}
```

Notice that our sample applies the Java plugin to each subproject. This means the tasks and configuration properties we have seen in the previous section are available in each subproject. So, you can compile, test, and JAR all the projects by running `gradle build` from the root project directory.

Also note that these plugins are only applied within the `subprojects` section, not at the root level, so the root build will not expect to find Java source files in the root project, only in the subprojects.

§

### Dependencies between projects

You can add dependencies between projects in the same build, so that, for example, the JAR file of one project is used to compile another project. In the `api` build file we will add a dependency on the `shared` project. Due to this dependency, Gradle will ensure that project `shared` always gets built before project `api`.

### Example 429. Multi-project build - dependencies between projects

#### api/build.gradle

```
dependencies {  
    compile project(':shared')  
}
```

See ??? for how to disable this functionality.

§

## Creating a distribution

We also add a distribution, that gets shipped to the client:

### Example 430. Multi-project build - distribution file

**api/build.gradle**

```
task dist(type: Zip) {
    dependsOn spiJar
    from 'src/dist'
    into('libs') {
        from spiJar.archivePath
        from configurations.runtime
    }
}

artifacts {
    archives dist
}
```

§

## Where to next?

In this chapter, you have seen how to do some of the things you commonly need to build a Java based project. This chapter is not exhaustive, and there are many other things you can do with Java projects in Gradle. You can find out more about the Java plugin in *The Java Plugin*, and you can find more sample Java projects in the `samples/java` directory in the Gradle distribution.

Otherwise, continue on to *Dependency Management for Java Projects*.

# Building Java & JVM projects

Gradle uses a convention-over-configuration approach to building JVM-based projects that borrows several conventions from Apache Maven. In particular, it uses the same default directory structure for source files and resources, and it works with Maven-compatible repositories.

We will look at Java projects in detail in this chapter, but most of the topics apply to other supported JVM languages as well, such as Kotlin, Groovy and Scala. If you don't have much experience with building JVM-based projects with Gradle, take a look at the Java Quickstart first as it will give you a good overview of the basics.

## §

### Introduction

The simplest build script for a Java project applies the Java Plugin and optionally sets the project version and Java compatibility versions:

#### Example 431. Applying the Java Plugin

```
build.gradle
plugins {
    id 'java'
}

sourceCompatibility = '1.8'
targetCompatibility = '1.8'
version = '1.2.1'
```

By applying the Java Plugin, you get a whole host of features:

A `compileJava` task that compiles all the Java source files under `src/main/java`

A `compileTestJava` task for source files under `src/test/java`

A `test` task that runs the tests from `src/test/java`

A `jar` task that packages the `main` compiled classes and resources from `src/main/resources` into a single JAR named `<project>-<version>.jar`

A `javadoc` task that generates Javadoc for the `main` classes

This isn't sufficient to build any non-trivial Java project — at the very least, you'll probably have some file dependencies. But it means that your build script only needs the information that is specific to *your* project.

**Note:** Although the properties in the example are optional, we recommend that you specify them in your projects. The compatibility options mitigate against problems with the project being built with different Java compiler versions, and the version string is important for tracking the progression of the project. The project version is also used in archive names by default.

The Java Plugin also integrates the above tasks into the standard Base Plugin lifecycle tasks:

`jar` is attached to `assemble` <sup>[11]</sup>

`test` is attached to `check`

The rest of the chapter explains the different avenues for customizing the build to your requirements. You will also see later how to adjust the build for libraries, applications, web apps and enterprise apps.

## §

### Declaring your source files via source sets

Gradle's Java support was the first to introduce a new concept for building source-based projects: *source sets*. The main idea is that source files and resources are often logically grouped by type, such as application code, unit tests and integration tests. Each logical group typically has its own sets of file dependencies, classpaths, and more. Significantly, the files that form a source set *don't have to be located in the same directory!*

Source sets are a powerful concept that tie together several aspects of compilation:


the source files and where they're located

the compilation classpath, including any required dependencies (via Gradle configurations)

where the compiled class files are placed

You can see how these relate to one another in this diagram:

**Figure 28. Source sets and Java compilation**

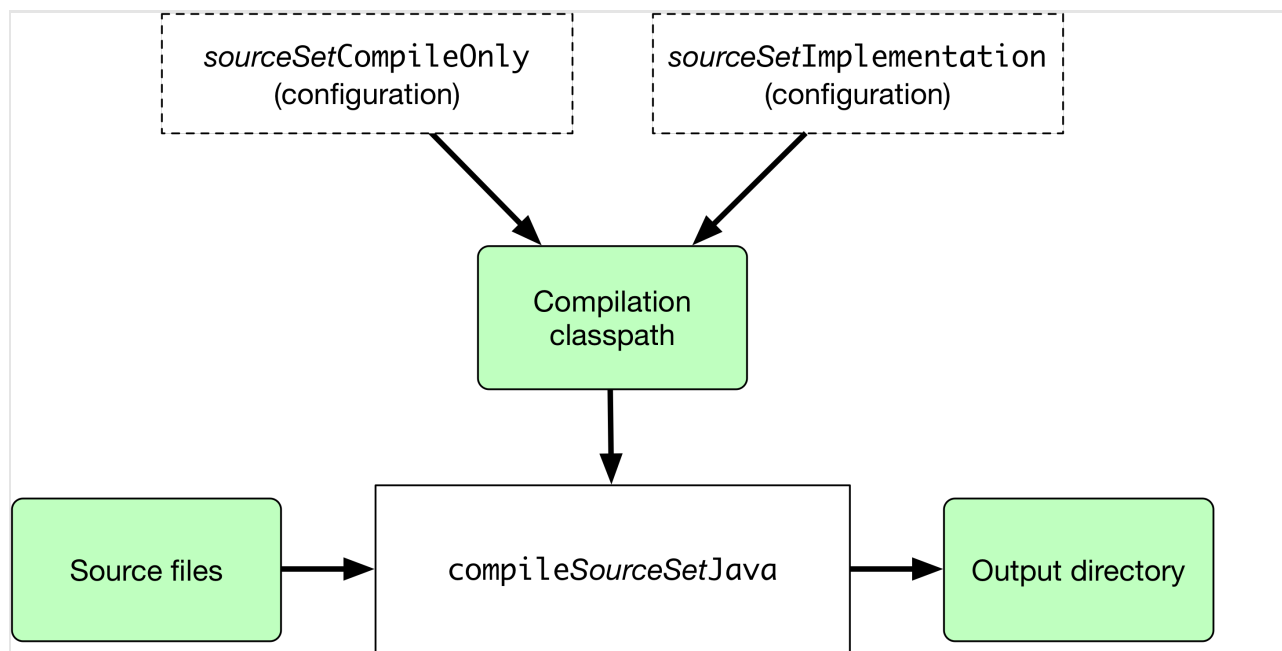


The shaded boxes represent properties of the source set itself. On top of that, the Java Plugin automatically creates a compilation task for every source set you or a plugin defines — named `compileSourceSetJava` — and several dependency configurations.

#### The `main` source set

Most language plugins, Java included, automatically create a source set called `main`, which is used for the project's production code. This source set is special in that its name is not included in the names of the configurations and tasks, hence why you have just a `compileJava` task and `compileOn` and `implementation` configurations rather than `compileMainJava`, `mainCompileOnly` and `main:` respectively.

Java projects typically include resources other than source files, such as properties files, that may need processing — for example by replacing tokens within the files — and packaging within the final JAR. The Java Plugin handles this by automatically creating a dedicated task for each defined source set called `process` (or `processResources` for the `main` source set). The following diagram shows how the source set fits in with this task:

**Figure 29. Processing non-source files for a source set**

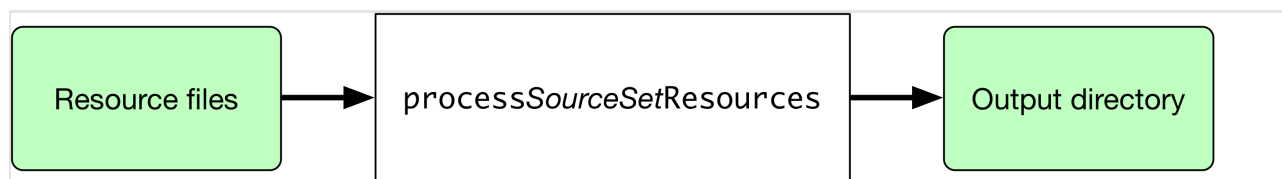

As before, the shaded boxes represent properties of the source set, which in this case comprises the locations of the resource files and where they are copied to.

In addition to the `main` source set, the Java Plugin defines a `test` source set that represents the project's tests. This source set is used by the `test` task, which runs the tests. You can learn more about this task and related topics in the Java testing chapter.

Projects typically use this source set for unit tests, but you can also use it for integration, acceptance and other types of test if you wish. The alternative approach is to define a new source set for each of your other test types, which is typically done for one or both of the following reasons:

You want to keep the tests separate from one another for aesthetics and manageability

The different test types require different compilation or runtime classpaths or some other difference in setup

You can see an example of this approach in the Java testing chapter, which shows you how to set up integration tests in a project.

You'll learn more about source sets and the features they provide in:

*Customizing file and directory locations*

*Configuring Java integration tests*

§

## Managing your dependencies

The vast majority of Java projects rely on libraries, so managing a project's dependencies is an important part of building a Java project. Dependency management is a big topic, so we will focus on the basics for Java projects here. If you'd like to dive into the detail, check out the introduction to dependency management .

Specifying the dependencies for your Java project requires just three pieces of information:

Which dependency you need, such as a name and version

What it's needed for, e.g. compilation or running

Where to look for it

The first two are specified in a `dependencies {}` block and the third in a `repositories {}` block. For example, to tell Gradle that your project requires version 3.6.7 of Hibernate Core to compile and run your production code, and that you want to download the library from the Maven Central repository, you can use the following fragment:



### Example 432. Declaring dependencies

#### build.gradle

```
repositories {
    mavenCentral()
}

dependencies {
    implementation 'org.hibernate:hibernate-core:3.6.7.Final'
}
```

The Gradle terminology for the three elements is as follows:

*Repository* (ex: `mavenCentral()`) — where to look for the modules you declare as dependencies

*Configuration* (ex: `implementation`) - a named collection of dependencies, grouped together for a specific goal such as compiling or running a module — a more flexible form of Maven scopes

*Module coordinate* (ex: `org.hibernate:hibernate-core-3.6.7.Final`) — the ID of the dependency, usually in the form '`<group>:<module>:<version>`' (or '`<groupId>:<artifactId>:<version>`' in Maven terminology)

You can find a more comprehensive glossary of dependency management terms [here](#).

As far as configurations go, the main ones of interest are:

`compileOnly` — for dependencies that are necessary to compile your production code but shouldn't be part of the runtime classpath

`implementation` (supersedes `compile`) — used for compilation and runtime

`runtimeOnly` (supersedes `runtime`) — only used at runtime, not for compilation

`testCompileOnly` — same as `compileOnly` except it's for the tests

`testImplementation` — test equivalent of `implementation`

`testRuntimeOnly` — test equivalent of `runtimeOnly`

You can learn more about these and how they relate to one another in the [plugin reference chapter](#).

Be aware that the Java Library Plugin creates an additional configuration — `api` — for dependencies that are required for compiling both the module and any modules that depend on it.

#### Why no `compile` configuration?

The Java Plugin has historically used the `compile` configuration for dependencies that are required to both compile and run a project's production code. It is now deprecated — although it won't be going away any time soon — because it doesn't distinguish between dependencies that impact the

public API of a Java library project and those that don't. You can learn more about the importance of this distinction in *Building Java libraries*.

We have only scratched the surface here, so we recommend that you read the dedicated dependency management chapters once you're comfortable with the basics of building Java projects with Gradle. Some common scenarios that require further reading include:

Defining a custom Maven- or Ivy-compatible repository

Using dependencies from a local filesystem directory

Declaring dependencies with *changing* (e.g. SNAPSHOT) and *dynamic* (range) versions

Declaring a sibling project as a dependency

Controlling transitive dependencies and their versions

Testing your fixes to a 3rd-party dependency via composite builds (a better alternative to publishing to and consuming from Maven Local)

You'll discover that Gradle has a rich API for working with dependencies — one that takes time to master, but is straightforward to use for common scenarios.

§

## Compiling your code

Compiling both your production and test code can be trivially easy if you follow the conventions:

Put your production source code under the `src/main/java` directory

Put your test source code under `src/test/java`

Declare your production compile dependencies in the `compileOnly` or `implementation` configurations (see previous section)

Declare your test compile dependencies in the `testCompileOnly` or `testImplementation` configurations

Run the `compileJava` task for the production code and `compileTestJava` for the tests

Other JVM language plugins, such as the one for Groovy, follow the same pattern of conventions. We recommend that you follow these conventions wherever possible, but you don't have to. There are several options for customization, as you'll see next.

§

## Customizing file and directory locations

Imagine you have a legacy project that uses an `src` directory for the production code and `test` for the test code. The conventional directory structure won't work, so you need to tell Gradle where to find the source files. You do that via source set configuration.

Each source set defines where its source code resides, along with the resources and the output directory for the class files. You can override the convention values by using the following syntax:

### Example 433. Declaring custom source directories

**build.gradle**

```
sourceSets {
    main {
        java {
            srcDirs = ['src']
        }
    }

    test {
        java {
            srcDirs = ['test']
        }
    }
}
```

Now Gradle will only search directly in `src` and `test` for the respective source code. What if you don't want to override the convention, but simply want to *add* an extra source directory, perhaps one that contains some third-party source code you want to keep separate? The syntax is similar:

### Example 434. Declaring custom source directories additively

**build.gradle**

```
sourceSets {
    main {
        java {
            srcDir 'thirdParty/src/main/java'
        }
    }
}
```

Crucially, we're using the *method* `srcDir()` here to append a directory path, whereas setting the `srcDirs` property replaces any existing values. This is a common convention in Gradle: setting a property replaces values, while the corresponding method appends values.

You can see all the properties and methods available on source sets in the DSL reference for [SourceSet](#) and [SourceDirectorySet](#). Note that `srcDirs` and `srcDir()` are both on `SourceDirectorySet`.

§

## Changing compiler options

Most of the compiler options are accessible through the corresponding task, such as `compileJava` and `compileTestJava`. These tasks are of type `JavaCompile`, so read the task reference for an up-to-date and comprehensive list of the options.

For example, if you want to use incremental compilation, use a separate JVM process for the compiler and prevent compilation failures from failing the build, you can use this configuration:

### Example 435. Setting Java compiler options

#### **build.gradle**

```
compileJava {  
    options.incremental = true  
    options.fork = true  
    options.failOnError = false  
}
```

That's also how you can change the verbosity of the compiler, disable debug output in the byte code and configure where the compiler can find annotation processors.

Two common options for the Java compiler are defined at the project level:

#### **sourceCompatibility**

Defines which language version of Java your source files should be treated as.

#### **targetCompatibility**

Defines the minimum JVM version your code should run on, i.e. it determines the version of byte code the compiler generates.

If you need or want more than one compilation task for any reason, you can either create a new source set or simply define a new task of type `JavaCompile`. We look at setting up a new source set next.

§

## Compiling and testing Java 6/7

Gradle can only run on Java version 7 or higher. However, support for running Gradle on Java 7 has been deprecated and is scheduled to be removed in Gradle 5.0. There are two reasons for deprecating support for Java 7:

Java 7 reached end of life. Therefore, Oracle ceased public availability of security fixes and upgrades for Java 7 as of April 2015.

Once support for Java 7 has ceased (likely with Gradle 5.0), Gradle's implementation can start to use Java 8 APIs optimized for performance and usability.

Gradle still supports compiling, testing, generating Javadoc and executing applications for Java 6 and Java

7. Java 5 is not supported.

To use Java 6 or Java 7, the following tasks need to be configured:

`JavaCompile` task to fork and use the correct Java home

`Javadoc` task to use the correct `javadoc` executable

`Test` and the `JavaExec` task to use the correct `java` executable.

The following sample shows how the `build.gradle` needs to be adjusted. In order to be able to make the build machine-independent, the location of the old Java home and target version should be configured in `GRA` [12] in the user's home directory on each developer machine, as shown in the example.

#### Example 436. Configure Java 6 build

##### **gradle.properties**

```
# in $HOME/.gradle/gradle.properties
javaHome=/Library/Java/JavaVirtualMachines/1.7.0.jdk/Contents/Home
targetJavaVersion=1.7
```

##### **build.gradle**

```
assert hasProperty('javaHome'): "Set the property 'javaHome' in your your gradle
assert hasProperty('targetJavaVersion'): "Set the property 'targetJavaVersion' in

sourceCompatibility = targetJavaVersion

def javaExecutablesPath = new File(javaHome, 'bin')
def javaExecutables = [:].withDefault { execName ->
    def executable = new File(javaExecutablesPath, execName)
    assert executable.exists(): "There is no ${execName} executable in ${javaHome}"
    executable
}
tasks.withType(AbstractCompile) {
    options.with {
        fork = true
        forkOptions.javaHome = file(javaHome)
    }
}
tasks.withType(Javadoc) {
    executable = javaExecutables.javadoc
}
tasks.withType(Test) {
    executable = javaExecutables.java
}
tasks.withType(JavaExec) {
    executable = javaExecutables.java
}
```

§

## Compiling independent sources separately

Most projects have at least two independent sets of sources: the production code and the test code. Gradle already makes this scenario part of its Java convention, but what if you have other sets of sources? One of the most common scenarios is when you have separate integration tests of some form or other. In that case, a custom source set may be just what you need.

You can see a complete example for setting up integration tests in the Java testing chapter. You can set up other source sets that fulfil different roles in the same way. The question then becomes: when should you define a custom source set?

To answer that question, consider whether the sources:

Need to be compiled with a unique classpath

Generate classes that are handled differently from the `main` and `test` ones

Form a natural part of the project

If your answer to both 3 and either one of the others is yes, then a custom source set is probably the right approach. For example, integration tests are typically part of the project because they test the code in `main`. In addition, they often have either their own dependencies independent of the `test` source set or they need to be run with a custom `Test` task.

Other common scenarios are less clear cut and may have better solutions. For example:

Separate API and implementation JARs — it may make sense to have these as separate projects, particularly if you already have a multi-project build

Generated sources — if the resulting sources should be compiled with the production code, add their path(s) to the `main` source set and make sure that the `compileJava` task depends on the task that generates the sources

If you're unsure whether to create a custom source set or not, then go ahead and do so. It should be straightforward and if it's not, then it's probably not the right tool for the job.

§

## Managing resources

Many Java projects make use of resources beyond source files, such as images, configuration files and localization data. Sometimes these files simply need to be packaged unchanged and sometimes they need to be processed as template files or in some other way. Either way, the Java Plugin adds a specific `Copy` task for each source set that handles the processing of its associated resources.

The task's name follows the convention of `processSourceSetResources` — or `processResources` for the `main` source set — and it will automatically copy any files in `src/[sourceSet]/resources` to a directory that

will be included in the production JAR. This target directory will also be included in the runtime classpath of the tests.

Since `processResources` is an instance of the `Copy` task, you can perform any of the processing described in the *Working With Files* chapter.

§

## Java properties files and reproducible builds

You can easily create Java properties files via the `WriteProperties` task, which fixes a well-known problem with `Properties.store()` that can reduce the usefulness of incremental builds.

The standard Java API for writing properties files produces a unique file every time, even when the same properties and values are used, because it includes a timestamp in the comments. Gradle's `WriteProperties` task generates exactly the same output byte-for-byte if none of the properties have changed. This is achieved by a few tweaks to how a properties file is generated:

- no timestamp comment is added to the output

- the line separator is system independent, but can be configured explicitly (it defaults to `'\n'`)

- the properties are sorted alphabetically

Sometimes it can be desirable to recreate archives in a byte for byte way on different machines. You want to be sure that building an artifact from source code produces the same result, byte for byte, no matter when and where it is built. This is necessary for projects like [reproducible-builds.org](https://reproducible-builds.org).

These tweaks not only lead to better incremental build integration, but they also help with reproducible builds. In essence, reproducible builds guarantee that you will see the same results from a build execution — including test results and production binaries — no matter when or on what system you run it.

§

## Running tests

Alongside providing automatic compilation of unit tests in `src/test/java`, the Java Plugin has native support for running tests that use JUnit 3, 4 & 5 (JUnit 5 support came in Gradle 4.6) and TestNG. You get:

- An automatic `test` task of type `Test`, using the `test` source set

- An HTML test report that includes the results from *all* `Test` tasks that run

- Easy filtering of which tests to run

- Fine-grained control over how the tests are run

- The opportunity to create your own test execution and test reporting tasks

You do *not* get a `Test` task for every source set you declare, since not every source set represents tests!

That's why you typically need to create your own `Test` tasks for things like integration and acceptance tests if they can't be included with the `test` source set.

As there is a lot to cover when it comes to testing, the topic has its own chapter in which we look at:

How tests are run

How to run a subset of tests via filtering

How Gradle discovers tests

How to configure test reporting and add your own reporting tasks

How to make use of specific JUnit and TestNG features

You can also learn more about configuring tests in the DSL reference for `Test`.

## §

### Packaging and publishing

How you package and potentially publish your Java project depends on what type of project it is. Libraries, applications, web applications and enterprise applications all have differing requirements. In this section, we will focus on the bare bones provided by the Java Plugin.

The one and only packaging feature provided by the Java Plugin directly is a `jar` task that packages all the compiled production classes and resources into a single JAR. This JAR is then added as an artifact — as opposed to a dependency — in the `archives` configuration, hence why it is automatically built by the `assemble` task.

If you want any other JAR or alternative archive built, you either have to apply an appropriate plugin or create the task manually. For example, if you want a task that generates a 'sources' JAR, define your own `Jar` task like so:

#### Example 437. Defining a custom task to create a 'sources' JAR

##### **build.gradle**

```
task sourcesJar(type: Jar) {
    classifier = 'sources'
    from sourceSets.main.allJava
}
```

See `Jar` for more details on the configuration options available to you. And note that you need to use `class` rather than `appendix` here for correct publication of the JAR.

If you instead want to create an 'uber' (AKA 'fat') JAR, then you can use a task definition like this:



### Example 438. Creating a Java uber or fat JAR

#### build.gradle

```
plugins {  
    id 'java'  
}  
  
version = '1.0.0'  
  
repositories {  
    mavenCentral()  
}  
  
dependencies {  
    implementation 'commons-io:commons-io:2.6'  
}  
  
task uberJar(type: Jar) {  
    appendix = 'uber'  
  
    from sourceSets.main.output  
    from configurations.runtimeClasspath.  
        findAll { it.name.endsWith('jar') }.  
        collect { zipTree(it) }  
}
```

There are several options for publishing a JAR once it has been created:

the Maven Publish Plugin

the Ivy Publish Plugin

the `uploadArchives` task — the original publishing mechanism — which works with both Ivy and (if you apply the Maven Plugin) Maven

The former two "Publish" plugins are the preferred options.

§

#### Modifying the JAR manifest

Each instance of the `Jar`, `War` and `Ear` tasks has a `manifest` property that allows you to customize the *MANIFEST.MF* file that goes into the corresponding archive. The following example demonstrates how to set attributes in the JAR's manifest:

#### Example 439. Customization of MANIFEST.MF

##### build.gradle

```
jar {
    manifest {
        attributes("Implementation-Title": "Gradle",
                   "Implementation-Version": version)
    }
}
```

See [Manifest](#) for the configuration options it provides.

You can also create standalone instances of `Manifest`. One reason for doing so is to share manifest information between JARs. The following example demonstrates how to share common attributes between JARs:

#### Example 440. Creating a manifest object.

##### build.gradle

```
ext.sharedManifest = manifest {
    attributes("Implementation-Title": "Gradle",
               "Implementation-Version": version)
}
task fooJar(type: Jar) {
    manifest = project.manifest {
        from sharedManifest
    }
}
```

Another option available to you is to merge manifests into a single `Manifest` object. Those source manifests can take the form of a text file or another `Manifest` object. In the following example, the source manifests are all text files except for `sharedManifest`, which is the `Manifest` object from the previous example:

#### Example 441. Separate MANIFEST.MF for a particular archive

##### build.gradle

```
task barJar(type: Jar) {
    manifest {
        attributes key1: 'value1'
        from sharedManifest, 'src/config/basemanifest.txt'
        from('src/config/javabasemanifest.txt',
            'src/config/libbasemanifest.txt') {
            eachEntry { details ->
                if (details.baseValue != details.mergeValue) {
                    details.value = baseValue
                }
                if (details.key == 'foo') {
                    details.exclude()
                }
            }
        }
    }
}
```

Manifests are merged in the order they are declared in the `from` statement. If the base manifest and the merged manifest both define values for the same key, the merged manifest wins by default. You can fully customize the merge behavior by adding `eachEntry` actions in which you have access to a [ManifestMergeDetails](#) instance for each entry of the resulting manifest. Note that the merge is done lazily, either when generating the JAR or when `Manifest.writeTo()` or `Manifest.getEffectiveManifest()` are called.

Speaking of `writeTo()`, you can use that to easily write a manifest to disk at any time, like so:

#### Example 442. Saving a MANIFEST.MF to disk

##### build.gradle

```
jar.manifest.writeTo("$buildDir/mymanifest.mf")
```

## §

### Generating API documentation

The Java Plugin provides a `javadoc` task of type [Javadoc](#), that will generate standard Javadocs for all your production code, i.e. whatever source is in the `main` source set. The task supports the core Javadoc and standard doclet options described in the Javadoc reference documentation. See [CoreJavadocOptions](#) and [StandardJavadocDocletOptions](#) for a complete list of those options.

As an example of what you can do, imagine you want to use AsciiDoc syntax in your Javadoc comments. To do this, you need to add AsciiDoclet to Javadoc's doclet path. Here's an example that does just that:

#### Example 443. Using a custom doclet with Javadoc

##### build.gradle

```
configurations {
    asciidoclet
}

dependencies {
    asciidoclet 'org.asciidoctor:asciidoclet:1.+'
}

javadoc {
    options.docletpath = configurations.asciidoclet.files.toList()
    options.doclet = 'org.asciidoctor.Asciidoclet'
}
```

You don't have to create a configuration for this, but it's an elegant way to handle dependencies that are required for a unique purpose.

You might also want to create your own Javadoc tasks, for example to generate API docs for the tests:

#### Example 444. Defining a custom Javadoc task

##### build.gradle

```
task testJavadoc(type: Javadoc) {
    source = sourceSets.test.allJava
}
```

These are just two non-trivial but common customizations that you might come across.

§

## Cleaning the build

The Java Plugin adds a `clean` task to your project by virtue of applying the Base Plugin. This task simply deletes everything in the `$buildDir` directory, hence why you should always put files generated by the build in there. The task is an instance of `Delete` and you can change what directory it deletes by setting its `destinationDir` property.

§

## Building Java libraries

The unique aspect of library projects is that they are used (or "consumed") by other Java projects. That means the dependency metadata published with the JAR file — usually in the form of a Maven POM — is crucial. In particular, consumers of your library should be able to distinguish between two different types of dependencies: those that are only required to compile your library and those that are also required to compile the consumer.

Gradle manages this distinction via the Java Library Plugin, which introduces an *api* configuration in addition to the *implementation* one covered in this chapter. If the types from a dependency appear in public fields or methods of your library's public classes, then that dependency is exposed via your library's public API and should therefore be added to the *api* configuration. Otherwise, the dependency is an internal implementation detail and should be added to *implementation*.

**Note:** The Java Library Plugin automatically applies the standard Java Plugin as well.

If you're unsure of the difference between an API and implementation dependency, the Java Library Plugin chapter has a detailed explanation. In addition, you can see a basic, practical example of building a Java library in the corresponding *guide*.

§

## Building Java applications

Java applications packaged as a JAR aren't set up for easy launching from the command line or a desktop environment. The Application Plugin solves the command line aspect by creating a distribution that includes the production JAR, its dependencies and launch scripts Unix-like and Windows systems.

See the plugin's chapter for more details, but here's a quick summary of what you get:

`assemble` creates ZIP and TAR distributions of the application containing everything needed to run it

A `run` task that starts the application from the build (for easy testing)

Shell and Windows Batch scripts to start the application

Note that you will need to explicitly apply the Java Plugin in your build script.

You can see a basic example of building a Java application in the corresponding *guide*.

§

## Building Java web applications

Java web applications can be packaged and deployed in a number of ways depending on the technology you use. For example, you might use Spring Boot with a fat JAR or a Reactive-based system running on Netty. Whatever technology you use, Gradle and its large community of plugins will satisfy your needs. Core Gradle, though, only directly supports traditional Servlet-based web applications deployed as WAR files.

That support comes via the War Plugin, which automatically applies the Java Plugin and adds an extra packaging step that does the following:

Copies static resources from `src/main/webapp` into the root of the WAR

Copies the compiled production classes into a `WEB-INF/classes` subdirectory of the WAR

Copies the library dependencies into a `WEB-INF/lib` subdirectory of the WAR

This is done by the `war` task, which effectively replaces the `jar` task — although that task remains — and is attached to the `assemble` lifecycle task. See the plugin's chapter for more details and configuration options.

There is no core support for running your web application directly from the build, but we do recommend that you try the Gretty community plugin, which provides an embedded Servlet container.

§

## Building Java EE applications

Java enterprise systems have changed a lot over the years, but if you're still deploying to JEE application servers, you can make use of the Ear Plugin. This adds conventions and a task for building EAR files. The plugin's chapter has more details.

---

[11] In fact, any artifact added to the `archives` configuration will be built by `assemble`

[12] For more details on `gradle.properties` see the section called "Gradle properties"

# Testing in Java & JVM projects

Testing on the JVM is a rich subject matter. There are many different testing libraries and frameworks, as well as many different types of test. All need to be part of the build, whether they are executed frequently or infrequently. This chapter is dedicated to explaining how Gradle handles differing requirements between and within builds, with significant coverage of how it integrates with the two most common testing frameworks: JUnit and TestNG.

It explains:

Ways to control how the tests are run (Test execution)

How to select specific tests to run (Test filtering)

What test reports are generated and how to influence the process (Test reporting)

How Gradle finds tests to run (Test detection)

How to make use of the major frameworks' mechanisms for grouping tests together (Test grouping)

But first, we look at the basics of JVM testing in Gradle.

§

## The basics

All JVM testing revolves around a single task type: `Test`. This runs a collection of test cases using any supported test library — JUnit, JUnit Platform or TestNG — and collates the results. You can then turn those results into a report via an instance of the `TestReport` task type.

In order to operate, the `Test` task type requires just two pieces of information:

Where to find the compiled test classes (property: `Test.getTestClassesDirs()`)

The execution classpath, which should include the classes under test as well as the test library that you're using (property: `Test.getClasspath()`)

When you're using a JVM language plugin — such as the Java Plugin — you will automatically get the following:

A dedicated `test` source set for unit tests

A `test` task of type `Test` that runs those unit tests

The JVM language plugins use the source set to configure the task with the appropriate execution classpath and the directory containing the compiled test classes. In addition, they attach the `test` task to the `check` lifecycle task.

It's also worth bearing in mind that the `test` source set automatically creates corresponding dependency configurations — of which the most useful are `testImplementation` and `testRuntimeOnly` — that the plugins tie into the `test` task's classpath.

All you need to do in most cases is configure the appropriate compilation and runtime dependencies and add any necessary configuration to the `test` task. The following example shows a simple setup that uses JUnit 4.x and changes the maximum heap size for the tests' JVM to 1 gigabyte:

#### Example 445. A basic configuration for the 'test' task

```
build.gradle
dependencies {
    testImplementation 'junit:junit:4.12'
}

test {
    useJUnit()

    maxHeapSize = '1G'
}
```

The `Test` task has many generic configuration options as well as several framework-specific ones that you can find described in [JUnitOptions](#), [JUnitPlatformOptions](#) and [TestNGOptions](#). We cover a significant number of them in the rest of the chapter.

If you want to set up your own `Test` task with its own set of test classes, then the easiest approach is to create your own source set and `Test` task instance, as shown in *Configuring integration tests*.

## §

### Test execution

Gradle executes tests in a separate ('forked') JVM, isolated from the main build process. This prevents classpath pollution and excessive memory consumption for the build process. It also allows you to run the tests with different JVM arguments than the build is using.

You can control how the test process is launched via several properties on the `Test` task, including the following:

#### `maxParallelForks` — default: 1

You can run your tests in parallel by setting this property to a value greater than 1. This may make your test suites complete faster, particularly if you run them on a multi-core CPU. When using parallel test



execution, make sure your tests are properly isolated from one another. Tests that interact with the filesystem are particularly prone to conflict, causing intermittent test failures.

Your tests can distinguish between parallel test processes by using the value of the `org.gradle.test.` property, which is unique for each process. You can use this for anything you want, but it's particularly useful for filenames and other resource identifiers to prevent the kind of conflict we just mentioned.

#### **forkEvery - default: 0 (no maximum)**

This property specifies the maximum number of test classes that Gradle should run on a test process before its disposed of and a fresh one created. This is mainly used as a way to manage leaky tests or frameworks that have static state that can't be cleared or reset between tests.

**Warning: a low value (other than 0) can severely hurt the performance of the tests**

#### **ignoreFailures — default: false**

If this property is `true`, Gradle will continue with the project's build once the tests have completed, even if some of them have failed. Note that, by default, the `Test` task always executes every test that it detects, irrespective of this setting.

#### **failFast — (since Gradle 4.6) default: false**

Set this to `true` if you want the build to fail and finish as soon as one of your tests fails. This can save a lot of time when you have a long-running test suite and is particularly useful when running the build on continuous integration servers. When a build fails before all tests have run, the test reports only include the results of the tests that have completed, successfully or not.

You can also enable this behavior by using the `--fail-fast` command line option.

#### **testLogging — default: not set**

This property represents a set of options that control which test events are logged and at what level. You can also configure other logging behavior via this property. See [TestLoggingContainer](#) for more detail.

See [Test](#) for details on all the available configuration options.

**Note:** The test process can exit unexpectedly if configured incorrectly. For instance, if the Java executable does not exist or an invalid JVM argument is provided, the test process will fail to start. Similarly, if a test makes programmatic changes to the test process, this can also cause unexpected failures.

For example, issues may occur if a `SecurityManager` is modified in a test because Gradle's internal messaging depends on reflection and socket communication, which may be disrupted if the permissions on the security manager change. In this particular case, you should restore the original `Sec` after the test so that the gradle test worker process can continue to function.

## §

### Test filtering

It's a common requirement to run subsets of a test suite, such as when you're fixing a bug or developing a new test case. Gradle provides two mechanisms to do this:

Filtering (the preferred option)

Test inclusion/exclusion

Filtering supersedes the inclusion/exclusion mechanism, but you may still come across the latter in the wild.

With Gradle's test filtering you can select tests to run based on:

A fully-qualified class name or fully qualified method name, e.g. `org.gradle.SomeTest`, `org.gradle.Som`

A simple class name or method name if the pattern starts with an upper-case letter, e.g. `SomeTest`, `SomeTe` (since Gradle 4.7)

`'*'` wildcard matching

You can enable filtering either in the build script or via the `--tests` command-line option. Here's an example of some filters that are applied every time the build runs:

#### Example 446. Filtering tests in the build script

**build.gradle**

```
test {
    filter {
        //include specific method in any of the tests
        includeTestsMatching "*UiCheck"

        //include all tests from package
        includeTestsMatching "org.gradle.internal.*"

        //include all integration tests
        includeTestsMatching "*IntegTest"
    }
}
```

For more details and examples of declaring filters in the build script, please see the [TestFilter](#) reference.

The command-line option is especially useful to execute a single test method. When you use `--tests`, be aware that the inclusions declared in the build script are still honored. It is also possible to supply multiple `--tests` options, all of whose patterns will take effect. The following sections have several examples of using the command-line option.

**Note:** Not all test frameworks play well with filtering. Some advanced, synthetic tests may not be

fully compatible. However, the vast majority of tests and use cases work perfectly well with Gradle's filtering mechanism.

The following two sections look at the specific cases of simple class/method names and fully-qualified names.

§

### Simple name pattern

Since 4.7, Gradle has treated a pattern starting with an uppercase letter as a simple class name, or a class name + method name. For example, the following command lines run either all or exactly one of the tests in the `SomeTestClass` test case, regardless of what package it's in:

```
# Executes all tests in SomeTestClass
gradle test --tests SomeTestClass

# Executes a single specified test in SomeTestClass
gradle test --tests SomeTestClass.someSpecificMethod

gradle test --tests SomeTestClass.*someMethod*
```

§

### Fully-qualified name pattern

Prior to 4.7 or if the pattern doesn't start with an uppercase letter, Gradle treats the pattern as fully-qualified. So if you want to use the test class name irrespective of its package, you would use `--tests *.SomeTestClass`. Here are some more examples:

```

# specific class
gradle test --tests org.gradle.SomeTestClass

# specific class and method
gradle test --tests org.gradle.SomeTestClass.someSpecificMethod

# method name containing spaces
gradle test --tests "org.gradle.SomeTestClass.some method containing spaces"

# all classes at specific package (recursively)
gradle test --tests 'all.in.specific.package*'

# specific method at specific package (recursively)
gradle test --tests 'all.in.specific.package*.someSpecificMethod'

gradle test --tests '*IntegTest'

gradle test --tests '*IntegTest*ui*'

gradle test --tests '*ParameterizedTest.foo*'

# the second iteration of a parameterized test
gradle test --tests '*ParameterizedTest.*[2]'
```

Note that the wildcard '\*' has no special understanding of the '.' package separator. It's purely text based. So will match any package, regardless of its 'depth'.

You can also combine filters defined at the command line with continuous build to re-execute a subset of tests immediately after every change to a production or test source file. The following executes all tests in the 'com.mypackage.foo' package or subpackages whenever a change triggers the tests to run:

```
gradle test --continuous --tests "com.mypackage.foo.*"
```

§

## Single test execution via System Properties

**Note:** This mechanism has been superseded by 'Test Filtering', described above. We only include it in case you encounter it in online forums and blogs.

Test inclusions/exclusions are a file-based — as opposed to a class name-based — mechanism for selecting tests to run. It's activated when you use the `-DtaskName.single=<pattern>` option on the command line, e.g. `-Dtest.single=MyTest`.

§

## Test reporting

The `Test` task generates the following results by default:

An HTML test report

XML test results in a format compatible with the Ant JUnit report task — one that is supported by many other tools, such as CI servers

An efficient binary format of the results used by the `Test` task to generate the other formats

In most cases, you'll work with the standard HTML report, which automatically includes the results from *all* your `Test` tasks, even the ones you explicitly add to the build yourself. For example, if you add a `Test` task for integration tests, the report will include the results of both the unit tests and the integration tests if both tasks are run.

Unlike with many of the testing configuration options, there are several project-level convention properties that affect the test reports. For example, you can change the destination of the test results and reports like so:

#### Example 447. Changing the default test report and results directories

##### **build.gradle**

```
reporting.baseDir = "my-reports"
testResultsDirName = "$buildDir/my-test-results"

task showDirs {
    doLast {
        logger.quiet(rootDir.toPath().relativize(project.reportsDir.toPath()).toPath().toString())
        logger.quiet(rootDir.toPath().relativize(project.testResultsDir.toPath()).toPath().toString())
    }
}
```

##### **Output of `gradle -q showDirs`**

```
> gradle -q showDirs
my-reports
build/my-test-results
```

Follow the link to the convention properties for more details.

There is also a standalone [TestReport](#) task type that you can use to generate a custom HTML test report. All it requires are a value for `destinationDir` and the test results you want included in the report. Here is a sample which generates a combined report for the unit tests from all subprojects:

### Example 448. Creating a unit test report for subprojects

#### build.gradle

```
subprojects {
    apply plugin: 'java'

    // Disable the test report for the individual test task
    test {
        reports.html.enabled = false
    }
}

task testReport(type: TestReport) {
    destinationDir = file("${buildDir}/reports/allTests")
    // Include the results from the `test` task in all subprojects
    reportOn subprojects*.test
}
```

You should note that the `TestReport` type combines the results from multiple test tasks and needs to aggregate the results of individual test classes. This means that if a given test class is executed by multiple test tasks, then the test report will include executions of that class, but it can be hard to distinguish individual executions of that class and their output.

## §

### Test detection

By default, Gradle will run all tests that it detects, which it does by inspecting the compiled test classes. This detection uses different criteria depending on the test framework used.

For *JUnit*, Gradle scans for both JUnit 3 and 4 test classes. A class is considered to be a JUnit test if it:

- Ultimately inherits from `TestCase` or `GroovyTestCase`

- Is annotated with `@RunWith`

- Contains a method annotated with `@Test` or a super class does

For *TestNG*, Gradle scans for methods annotated with `@Test`.

Note that abstract classes are not executed. In addition, be aware that Gradle scans up the inheritance tree into jar files on the test classpath. So if those JARs contain test classes, they will also be run.

If you don't want to use test class detection, you can disable it by setting the `scanForTestClasses` property on `Test` to `false`. When you do that, the test task uses only the `includes` and `excludes` properties to find test classes.

If `scanForTestClasses` is `false` and no include or exclude patterns are specified, Gradle defaults to running any class that matches the patterns `**/*Tests.class` and `**/*Test.class`, excluding those

that match `**/Abstract*.class`.

**Note:** With JUnit Platform, only `includes` and `excludes` are used to filter test classes — `scanForTests` has no effect.

§

## Test grouping

JUnit, JUnit Platform and TestNG allow sophisticated groupings of test methods.

JUnit 4.8 introduced the concept of categories for grouping JUnit 4 tests classes and methods.<sup>[13]</sup> `Test.useJUnit(org.gradle.api.Action)` allows you to specify the JUnit categories you want to include and exclude. For example, the following configuration includes tests in `CategoryA` and excludes those in `CategoryB` for the `test` task:

### Example 449. JUnit Categories

```
build.gradle
test {
    useJUnit {
        includeCategories 'org.gradle.junit.CategoryA'
        excludeCategories 'org.gradle.junit.CategoryB'
    }
}
```

JUnit Platform introduced tagging to replace categories. You can specify the included/excluded tags via `Test.useJUnitPlatform(org.gradle.api.Action)`, as follows:

### Example 450. JUnit Platform Tags

```
build.gradle
test {
    useJUnitPlatform {
        includeTags 'fast'
        excludeTags 'slow'
    }
}
```

The TestNG framework uses the concept of test groups for a similar effect.<sup>[14]</sup> You can configure which test groups to include or exclude during the test execution via the `Test.useTestNG(org.gradle.api.Action)` setting, as seen here:

### Example 451. Grouping TestNG tests

**build.gradle**

```
test {
    useTestNG {
        excludeGroups 'integrationTests'
        includeGroups 'unitTests'
    }
}
```

§

## Using JUnit 5

JUnit 5 is the latest version of the well-known JUnit test framework. Unlike its predecessor, JUnit 5 is modularized and composed of several modules:

```
JUnit 5 = JUnit Platform + JUnit Jupiter + JUnit Vintage
```

The JUnit Platform serves as a foundation for launching testing frameworks on the JVM. JUnit Jupiter is the combination of the new programming model and extension model for writing tests and extensions in JUnit 5. JUnit Vintage provides a `TestEngine` for running JUnit 3 and JUnit 4 based tests on the platform.

The following code enables JUnit Platform support in `build.gradle`:

### Example 452. Enabling JUnit Platform to run your tests

**build.gradle**

```
test {
    useJUnitPlatform()
}
```

See `Test.useJUnitPlatform()` for more details.

**Note:** There are some known limitations of using JUnit 5 with Gradle, for example that tests in static nested classes won't be discovered and classes are still displayed by their class name instead of `@DisplayName`. These will be fixed in future version of Gradle. If you find more, please tell us at <https://github.com/gradle/gradle/issues/new>

§

## Compiling and executing JUnit Jupiter tests

To enable JUnit Jupiter support in Gradle, all you need to do is add the following dependencies:



### Example 453. JUnit Jupiter dependencies

#### build.gradle

```
dependencies {  
    testImplementation 'org.junit.jupiter:junit-jupiter-api:5.1.0'  
    testRuntimeOnly 'org.junit.jupiter:junit-jupiter-engine:5.1.0'  
}
```

You can then put your test cases into `src/test/java` as normal and execute them with `gradle test`.

§

### Executing legacy tests with JUnit Vintage

If you want to run JUnit 3/4 tests on JUnit Platform, or even mix them with Jupiter tests, you should add extra JUnit Vintage Engine dependencies:

### Example 454. JUnit Vintage dependencies

#### build.gradle

```
dependencies {  
    testImplementation 'org.junit.jupiter:junit-jupiter-api:5.1.0'  
    testRuntimeOnly 'org.junit.jupiter:junit-jupiter-engine:5.1.0'  
    testCompileOnly 'junit:junit:4.12'  
    testRuntimeOnly 'org.junit.vintage:junit-vintage-engine:5.1.0'  
}
```

In this way, you can use `gradle test` to test JUnit 3/4 tests on JUnit Platform, without the need to rewrite them.

A sample of mixed tests can be found at `samples/testing/junitplatform/mix` in the '-all' distribution of Gradle.

§

### Filtering test engine

JUnit Platform allows you to use different test engines. JUnit currently provides two `TestEngine` implementations out of the box: `junit-jupiter-engine` and `junit-vintage-engine`. You can also write and plug in your own `TestEngine` implementation as documented here.

By default, all test engines on the test runtime classpath will be used. To control specific test engine implementations explicitly, you can add the following setting to your build script:

### Example 455. Filter specific engines

```
build.gradle
test {
    useJUnitPlatform {
        includeEngines 'junit-vintage'
        // excludeEngines 'junit-jupiter'
    }
}
```

A test engine filtering sample can be found at `samples/testing/junitplatform/engine` in the 'all' distribution of Gradle.

§

## Test execution order in TestNG

TestNG allows explicit control of the execution order of tests when you use a *testng.xml* file. Without such a file — or an equivalent one configured by `TestNGOptions.getSuiteXmlBuilder()` — you can't specify the test execution order. However, what you *can* do is control whether all aspects of a test — including its associated `@BeforeXXX` and `@AfterXXX` methods, such as those annotated with `@Before/AfterClass` and `@Before/AfterMethod` — are executed before the next test starts. You do this by setting the `TestNGOptions.getPreserveOrder()` property to `true`. If you set it to `false`, you may encounter scenarios in which the execution order is something like: `TestA.doBeforeClass()` `TestB.doBeforeClass()` `TestA` tests.

While preserving the order of tests is the default behavior when directly working with *testng.xml* files, the TestNG API that is used by Gradle's TestNG integration executes tests in unpredictable order by default.<sup>[15]</sup> The ability to preserve test execution order was introduced with TestNG version 5.14.5. Setting the `preserve` property to `true` for an older TestNG version will cause the build to fail.

### Example 456. Preserving order of TestNG tests

```
build.gradle
test {
    useTestNG {
        preserveOrder true
    }
}
```

The `groupByInstance` property controls whether tests should be grouped by instance rather than by class. The TestNG documentation explains the difference in more detail, but essentially, if you have a test method `A()` that depends on `B()`, grouping by instance ensures that each A-B pairing, e.g. `B(1)-A(1)`, is executed before the next pairing. With group by class, all `B()` methods are run and then all `A()` ones.

Note that you typically only have more than one instance of a test if you're using a data provider to parameterize it. Also, grouping tests by instances was introduced with TestNG version 6.1. Setting the `group`

property to `true` for an older TestNG version will cause the build to fail.

#### Example 457. Grouping TestNG tests by instances

**build.gradle**

```
test {  
    useTestNG {  
        groupByInstances = true  
    }  
}
```

§

### TestNG parameterized methods and reporting

TestNG supports parameterizing test methods, allowing a particular test method to be executed multiple times with different inputs. Gradle includes the parameter values in its reporting of the test method execution.

Given a parameterized test method named `aTestMethod` that takes two parameters, it will be reported with the name `aTestMethod(toStringValueOfParam1, toStringValueOfParam2)`. This makes it easy to identify the parameter values for a particular iteration.

§

## Configuring integration tests

A common requirement for projects is to incorporate integration tests in one form or another. Their aim is to verify that the various parts of the project are working together properly. This often means that they require special execution setup and dependencies compared to unit tests.

The simplest way to add integration tests to your build is by taking these steps:

Create a new source set for them

Add the dependencies you need to the appropriate configurations for that source set

Configure the compilation and runtime classpaths for that source set

Create a task to run the integration tests

You may also need to perform some additional configuration depending on what form the integration tests take. We will discuss those as we go.

Let's start with a practical example that implements the first three steps in a build script, centered around a new source set `intTest`:

### Example 458. Setting up working integration tests

#### **build.gradle**

```
sourceSets {
    intTest {
        compileClasspath += sourceSets.main.output
        runtimeClasspath += sourceSets.main.output
    }
}

configurations {
    intTestImplementation.extendsFrom implementation
    intTestRuntimeOnly.extendsFrom runtimeOnly
}

dependencies {
    intTestImplementation 'junit:junit:4.12'
}
```

This will set up a new source set called `intTest` that automatically creates:

`intTestImplementation`, `intTestCompileOnly`, `intTestRuntimeOnly` configurations (and a few others that are less commonly needed)

A `compileIntTestJava` task that will compile all the source files under `src/intTest/java`

The example also does the following, not all of which you may need for your specific integration tests:

Adds the production classes from the `main` source set to the compilation and runtime classpaths of the integration tests — `sourceSets.main.output` is a file collection of all the directories containing compiled production classes and resources

Makes the `intTestImplementation` configuration extend from `implementation`, which means that all the declared dependencies of the production code also become dependencies of the integration tests

Does the same for the `intTestRuntimeOnly` configuration

In most cases, you want your integration tests to have access to the classes under test, which is why we ensure that those are included on the compilation and runtime classpaths in this example. But some types of test interact with the production code in a different way. For example, you may have tests that run your application as an executable and verify the output. In the case of web applications, the tests may interact with your application via HTTP. Since the tests don't need direct access to the classes under test in such cases, you don't need to add the production classes to the test classpath.

Another common step is to attach all the unit test dependencies to the integration tests as well — via `intTestImplementation` — but that only makes sense if the integration tests require *all* or nearly all the same dependencies that the unit tests have.

There are a couple of other facets of the example you should take note of:

`+=` allows you to append paths and collections of paths to `compileClasspath` and `runtimeClasspath` instead of overwriting them

If you want to use the convention-based configurations, such as `intTestImplementation`, you *must* declare the dependencies *after* the new source set

Creating and configuring a source set automatically sets up the compilation stage, but it does nothing with respect to running the integration tests. So the last piece of the puzzle is a custom test task that uses the information from the new source set to configure its runtime classpath and the test classes:

#### Example 459. Defining a working integration test task

##### **build.gradle**

```
task integrationTest(type: Test) {
    description = 'Runs integration tests.'
    group = 'verification'

    testClassesDirs = sourceSets.intTest.output.classesDirs
    classpath = sourceSets.intTest.runtimeClasspath
    shouldRunAfter test
}

check.dependsOn integrationTest
```

Again, we're accessing a source set to get the relevant information, i.e. where the compiled test classes are — the `testClassesDir` property — and what needs to be on the classpath when running them — `classpath`.

Users commonly want to run integration tests after the unit tests, because they are often slower to run and you want the build to fail early on the unit tests rather than later on the integration tests. That's why the above example adds a `shouldRunAfter()` declaration. This is preferred over `mustRunAfter()` so that Gradle has more flexibility in executing the build in parallel.

## §

### Skipping the tests

If you want to skip the tests when running a build, you have a few options. You can either do it via command line arguments or in the build script. To do it on the command line, you can use the `-x` or `--exclude-task` option like so:

```
gradle build -x test
```

This excludes the `test` task and any other task that it *exclusively* depends on, i.e. no other task depends on the same task. Those tasks will not be marked "SKIPPED" by Gradle, but will simply not appear in the list of tasks executed.

Skipping a test via the build script can be done a few ways. One common approach is to make test

execution conditional via the `Task.onlyIf(org.gradle.api.specs.Spec)` method. The following sample skips the `test` task if the project has a property called `mySkipTests`:

#### Example 460. Skipping the unit tests based on a project property

**build.gradle**

```
test.onlyIf { !project.hasProperty('mySkipTests') }
```

In this case, Gradle will mark the skipped tests as "SKIPPED" rather than exclude them from the build.

§

## Forcing tests to run

In well-defined builds, you can rely on Gradle to only run tests if the tests themselves or the production code change. However, you may encounter situations where the tests rely on a third-party service or something else that might change but can't be modeled in the build.

You can force tests to run in this situation by cleaning the output of the relevant `Test` task — say `test` — and running the tests again, like so:

```
gradle cleanTest test
```

`cleanTest` is based on a *task rule* provided by the Base Plugin. You can use it for *any* task.

§

## Debugging when running tests

On the few occasions that you want to debug your code while the tests are running, it can be helpful if you can attach a debugger at that point. You can either set the `Test.getDebug()` property to `true` or use the `-` command line option.

When debugging for tests is enabled, Gradle will start the test process suspended and listening on port 5005.

---

[13] The JUnit wiki contains a detailed description on how to work with JUnit categories: <https://github.com/junit-team/junit/wiki/Categories>.

[14] The TestNG documentation contains more details about test groups: <http://testng.org/doc/documentation-main.html#test-groups>.

[15] The TestNG documentation contains more details about test ordering when working with `testng.xml` files: <http://testng.org/doc/documentation-main.html#testng-xml>.

# The Base Plugin

The Base Plugin provides some tasks and conventions that are common to most builds and adds a structure to the build that promotes consistency in how they are run. Its most significant contribution is a set of *lifecycle* tasks that act as an umbrella for the more specific tasks provided by other plugins and build authors.

§

## Usage

**Example 461. Applying the Base Plugin**

```
build.gradle  
plugins {  
    id 'base'  
}
```

§

## Tasks

### **clean** — type: Delete

Deletes the build directory and everything in it, i.e. the path specified by the `Project.getBuildDir()` project property.

### **check** — *lifecycle task*

Plugins and build authors should attach their verification tasks, such as ones that run tests, to this lifecycle task using `check.dependsOn(task)`.

### **assemble** — *lifecycle task*

Plugins and build authors should attach tasks that produce distributions and other consumable artifacts to this lifecycle task. For example, `jar` produces the consumable artifact for Java libraries. Attach tasks to this lifecycle task using `assemble.dependsOn(task)`.

### **build** — *lifecycle task*

*Depends on:* `check`, `assemble`

Intended to build everything, including running all tests, producing the production artifacts and generating documentation. You will probably rarely attach concrete tasks directly to `build` as `assemble` and `check` are typically more appropriate.

### **buildConfiguration** — task rule

Assembles those artifacts attached to the named configuration. For example, `buildArchives` will execute any task that is required to create any artifact attached to the `archives` configuration.

### **uploadConfiguration** — task rule

Does the same as `buildConfiguration`, but also uploads all the artifacts attached to the given configuration.

### **cleanTask** — task rule

Removes the defined outputs of a task, e.g. `cleanJar` will delete the JAR file produced by the `jar` task of the Java Plugin.

§

## Dependency management

The Base Plugin adds no configurations for dependencies, but it does add the following configurations for artifacts:

### **default**

A fallback configuration used by consumer projects. Let's say you have project B with a *project dependency* on project A. Gradle uses some internal logic to determine which of project A's artifacts and dependencies are added to the specified configuration of project B. If no other factors apply — you don't



need to worry what these are — then Gradle falls back to using everything in project A's default configuration.

**New builds and plugins should not be using the default configuration!** It remains for the reason of backwards compatibility.

## **archives**

A standard configuration for the production artifacts of a project. This results in an `uploadArchives` task for publishing artifacts attached to the `archives` configuration.

Note that the `assemble` task generates all artifacts that are attached to the `archives` configuration.

## §

## Conventions

The Base Plugin only adds conventions related to the creation of archives, such as ZIPs, TARs and JARs. Specifically, it provides the following project properties that you can set:

**archivesBaseName** — default: `$project.name`

Provides the default `AbstractArchiveTask.getBaseName()` for archive tasks.

**distsDirName** — default: *distributions*

Default name of the directory in which distribution archives, i.e. non-JARs, are created.

**libsDirName** — default: *libs*

Default name of the directory in which library archives, i.e. JARs, are created.

The plugin also provides default values for the following properties on any task that extends `AbstractArchiveTask`:

**destinationDir**

Defaults to `$buildDir/$distsDirName` for non-JAR archives and `$buildDir/$libsDirName` for JARs and derivatives of JAR, such as WARs.

**version**

Defaults to `$project.version` or 'unspecified' if the project has no version.

**baseName**

Defaults to `$archivesBaseName`.

# The Java Plugin

The Java plugin adds Java compilation along with testing and bundling capabilities to a project. It serves as the basis for many of the other JVM language Gradle plugins. You can find a comprehensive introduction and overview to the Java Plugin in the *Building Java & JVM projects* chapter.

§

## Usage

To use the Java plugin, include the following in your build script:

**Example 462. Using the Java plugin**

```
build.gradle
apply plugin: 'java'
```

§

## Project layout

The Java plugin assumes the project layout shown below. None of these directories need to exist or have anything in them. The Java plugin will compile whatever it finds, and handles anything which is missing.

**src/main/java**

Production Java source.

**src/main/resources**

Production resources, such as XML and properties files.

**src/test/java**

Test Java source.

**src/test/resources**

Test resources.

**src/sourceSet/java**

Java source for the source set named *sourceSet*.

**src/sourceSet/resources**

Resources for the source set named *sourceSet*.

§

## Changing the project layout

You configure the project layout by configuring the appropriate source set. This is discussed in more detail in the following sections. Here is a brief example which changes the main Java and resource source directories.

### Example 463. Custom Java source layout

#### **build.gradle**

```
sourceSets {
    main {
        java {
            srcDirs = ['src/java']
        }
        resources {
            srcDirs = ['src/resources']
        }
    }
}
```

§

## Source sets

The plugin adds the following source sets:

#### **main**

Contains the production source code of the project, which is compiled and assembled into a JAR.

#### **test**

Contains your test source code, which is compiled and executed using JUnit or TestNG. These are typically unit tests, but you can include any test in this source set as long as they all share the same compilation and runtime classpaths.

§

## Source set properties

The following table lists some of the important properties of a source set. You can find more details in the API documentation for [SourceSet](#).

#### **name** — (read-only) **String**

The name of the source set, used to identify it.

#### **output** — (read-only) [SourceSetOutput](#)

The output files of the source set, containing its compiled classes and resources.

**output.classesDirs** — (read-only) [FileCollection](#)

*Default value:* `$buildDir/classes/java/$name`, e.g. `build/classes/java/main`

The directories to generate the classes of this source set into. May contain directories for other JVM languages, e.g. `build/classes/kotlin/main`.

**output.resourcesDir** — [File](#)

*Default value:* `$buildDir/resources/$name`, e.g. `build/resources/main`

The directory to generate the resources of this source set into.

**compileClasspath** — [FileCollection](#)

*Default value:* `${name}CompileClasspath` configuration

The classpath to use when compiling the source files of this source set.

**annotationProcessorPath** — [FileCollection](#)

*Default value:* `${name}AnnotationProcessor` configuration

The processor path to use when compiling the source files of this source set.

**runtimeClasspath** — [FileCollection](#)

*Default value:* `$output`, `${name}RuntimeClasspath` configuration

The classpath to use when executing the classes of this source set.

**java** — (read-only) [SourceDirectorySet](#)

The Java source files of this source set. Contains only `.java` files found in the Java source directories, and excludes all other files.

**java.srcDirs** — [Set<File>](#)

*Default value:* `src/$name/java`, e.g. `src/main/java`

The source directories containing the Java source files of this source set. You can set this to any value that is described in this section.

**java.outputDir** — [File](#)

*Default value:* `$buildDir/classes/java/$name`, e.g. `build/classes/java/main`

The directory to generate compiled Java sources into. You can set this to any value that is described in this section.

**resources** — (read-only) [SourceDirectorySet](#)

The resources of this source set. Contains only resources, and excludes any `.java` files found in the resource directories. Other plugins, such as the Groovy Plugin, exclude additional types of files from this collection.

**resources.srcDirs** — [Set<File>](#)

*Default value:* `[src/$name/resources]`

The directories containing the resources of this source set. You can set this to any type of value that is described in this section.

#### **allJava** — (read-only) `SourceDirectorySet`

*Default value:* Same as `java` property

All Java files of this source set. Some plugins, such as the Groovy Plugin, add additional Java source files to this collection.

#### **allSource** — (read-only) `SourceDirectorySet`

*Default value:* Sum of everything in the `resources` and `java` properties

All source files of this source set of any language. This includes all resource files and all Java source files. Some plugins, such as the Groovy Plugin, add additional source files to this collection.

§

### Defining new source sets

See the integration test example in the *Testing in Java & JVM projects* chapter.

§

### Some other simple source set examples

Adding a JAR containing the classes of a source set:

#### **Example 464. Assembling a JAR for a source set**

##### **build.gradle**

```
task intTestJar(type: Jar) {
    from sourceSets.intTest.output
}
```

Generating Javadoc for a source set:

#### **Example 465. Generating the Javadoc for a source set**

##### **build.gradle**

```
task intTestJavadoc(type: Javadoc) {
    source sourceSets.intTest.allJava
}
```

Adding a test suite to run the tests in a source set:

## Example 466. Running tests in a source set

### build.gradle

```
task intTest(type: Test) {
    testClassesDirs = sourceSets.intTest.output.classesDirs
    classpath = sourceSets.intTest.runtimeClasspath
}
```

## §

## Tasks

The Java plugin adds a number of tasks to your project, as shown below.

### compileJava — type: [JavaCompile](#)

*Depends on:* All tasks which contribute to the compilation classpath, including `jar` tasks from projects that are on the classpath via project dependencies

Compiles production Java source files using the JDK compiler.

### processResources — type: [Copy](#)

Copies production resources into the production resources directory.

### classes

*Depends on:* `compileJava`, `processResources`

This is an aggregate task that just depends on other tasks. Other plugins may attach additional compilation tasks to it.

### compileTestJava — type: [JavaCompile](#)

*Depends on:* `classes`, and all tasks that contribute to the test compilation classpath

Compiles test Java source files using the JDK compiler.

### processTestResources — type: [Copy](#)

Copies test resources into the test resources directory.

### testClasses

*Depends on:* `compileTestJava`, `processTestResources`

This is an aggregate task that just depends on other tasks. Other plugins may attach additional test compilation tasks to it.

### jar — type: [Jar](#)

*Depends on:* `classes`

Assembles the production JAR file, based on the classes and resources attached to the `main` source set.

**javadoc** — **type:** [Javadoc](#)

*Depends on:* `classes`

Generates API documentation for the production Java source using Javadoc.

**test** — **type:** [Test](#)

*Depends on:* `testClasses`, and all tasks which produce the test runtime classpath

Runs the unit tests using JUnit or TestNG.

**uploadArchives** — **type:** [Upload](#)

*Depends on:* `jar`, and any other task that produces an artifact attached to the `archives` configuration

Uploads artifacts in the `archives` configuration — including the production JAR file — to the configured repositories.

**clean** — **type:** [Delete](#)

Deletes the project build directory.

**cleanTaskName** — **type:** [Delete](#)

Deletes files created by the specified task. For example, `cleanJar` will delete the JAR file created by the `jar` task and `cleanTest` will delete the test results created by the `test` task.

§

## SourceSet Tasks

For each source set you add to the project, the Java plugin adds the following tasks:

**compileSourceSetJava** — **type:** [JavaCompile](#)

*Depends on:* All tasks which contribute to the source set's compilation classpath

Compiles the given source set's Java source files using the JDK compiler.

**processSourceSetResources** — **type:** [Copy](#)

Copies the given source set's resources into the resources directory.

**sourceSetClasses** — **type:** [Task](#)

*Depends on:* `compileSourceSetJava`, `processSourceSetResources`

Prepares the given source set's classes and resources for packaging and execution. Some plugins may add additional compilation tasks for the source set.

§

## Lifecycle Tasks

The Java plugin attaches some of its tasks to the lifecycle tasks defined by the Base Plugin — which the Java Plugin applies automatically — and it also adds a few other lifecycle tasks:

## **assemble**

*Depends on:* `jar`, and all other tasks that create artifacts attached to the `archives` configuration

Aggregate task that assembles all the archives in the project. This task is added by the Base Plugin.

## **check**

*Depends on:* `test`

Aggregate task that performs verification tasks, such as running the tests. Some plugins add their own verification tasks to `check`. You should also attach any custom `Test` tasks to this lifecycle task if you want them to execute for a full build. This task is added by the Base Plugin.

## **build**

*Depends on:* `check`, `assemble`

Aggregate tasks that performs a full build of the project. This task is added by the Base Plugin.

## **buildNeeded**

*Depends on:* `build`, and `buildNeeded` tasks in all projects that are dependencies in the `testRuntime` configuration.

Performs a full build of the project and all projects it depends on.

## **buildDependents**

*Depends on:* `build`, and `buildDependents` tasks in all projects that have this project as a dependency in their `testRuntimeClasspath` configurations

Performs a full build of the project and all projects which depend upon it.

## **buildConfigName — task rule**

*Depends on:* all tasks that generate the artifacts attached to the named — `ConfigName` — configuration

Assembles the artifacts for the specified configuration. This rule is added by the Base Plugin.

## **uploadConfigName — task rule, type: `Upload`**


*Depends on:* all tasks that generate the artifacts attached to the named — `ConfigName` — configuration

Assembles and uploads the artifacts in the specified configuration. This rule is added by the Base Plugin.

The following diagram shows the relationships between these tasks.



Figure 30. Java plugin - tasks

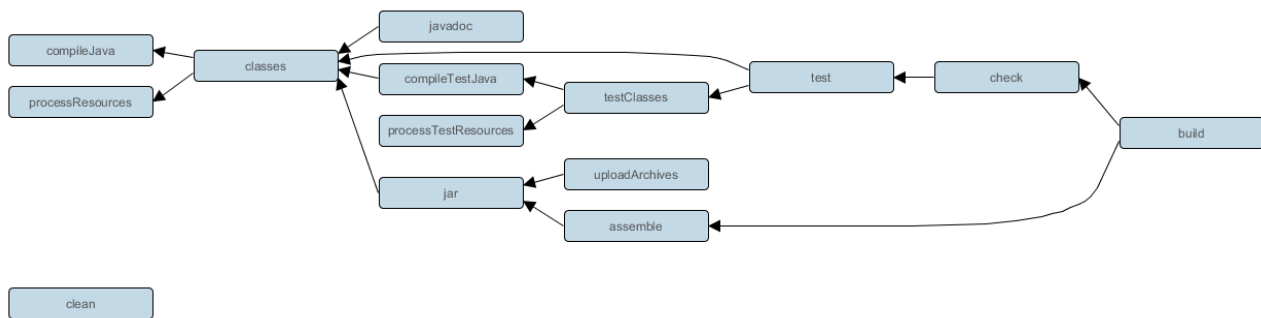

§

## Dependency management

The Java plugin adds a number of dependency configurations to your project, as shown below. It assigns those configurations to tasks such as `compileJava` and `test`.

§

### Dependency configurations

**Note:** To find information on the `api` configuration, please consult the Java Library Plugin reference documentation and the Dependency Management Tutorial.

#### `compile`(Deprecated)

Compile time dependencies. Superseded by `implementation`.

#### `implementation` extends `compile`

Implementation only dependencies.

#### `compileOnly`

Compile time only dependencies, not used at runtime.

#### `compileClasspath` extends `compile`, `compileOnly`, `implementation`

Compile classpath, used when compiling source. Used by task `compileJava`.

#### `annotationProcessor`

Annotation processors used during compilation.

#### `runtime`(Deprecated) extends `compile`

Runtime dependencies. Superseded by `runtimeOnly`.

#### `runtimeOnly`

Runtime only dependencies.

#### `runtimeClasspath` extends `runtimeOnly`, `runtime`, `implementation`

Runtime classpath contains elements of the implementation, as well as runtime only elements.

#### **testCompile(Deprecated) extends compile**

Additional dependencies for compiling tests. Superseded by `testImplementation`.

#### **testImplementation extends testCompile, implementation**

Implementation only dependencies for tests.

#### **testCompileOnly**

Additional dependencies only for compiling tests, not used at runtime.

#### **testCompileClasspath extends testCompile, testCompileOnly, testImplementation**

Test compile classpath, used when compiling test sources. Used by task `compileTestJava`.

#### **testRuntime(Deprecated) extends runtime, testCompile**

Additional dependencies for running tests only. Used by task `test`. Superseded by `testRuntimeOnly`.

#### **testRuntimeOnly extends runtimeOnly**

Runtime only dependencies for running tests. Used by task `test`.

#### **testRuntimeClasspath extends testRuntimeOnly, testRuntime, testImplementation**

Runtime classpath for running tests.


#### **archives**

Artifacts (e.g. jars) produced by this project. Used by tasks `uploadArchives`.

#### **default extends runtime**

The default configuration used by a project dependency on this project. Contains the artifacts and dependencies required by this project at runtime.

**Figure 31. Java plugin - dependency configurations**

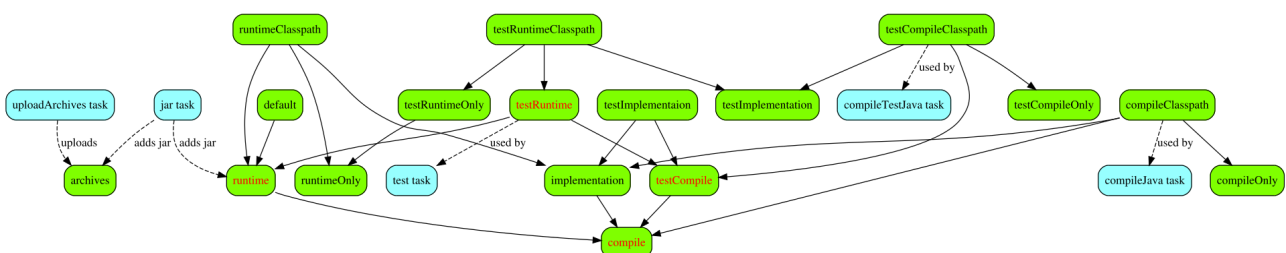

For each source set you add to the project, the Java plugin adds the following dependency configurations:

§

## SourceSet dependency configurations

### **`sourceSetCompile(Deprecated)`**

Compile time dependencies for the given source set. Superseded by `sourceSetImplementation`.

### **`sourceSetImplementation extends sourceSetCompile`**

Compile time dependencies for the given source set. Used by `sourceSetCompileClasspath`, `sourceSetRuntimeClasspath`, and `sourceSetRuntimeOnlyClasspath`.

### **`sourceSetCompileOnly`**

Compile time only dependencies for the given source set, not used at runtime.

### **`sourceSetCompileClasspath extends compileSourceSetJava`**

Compile classpath, used when compiling source. Used by `sourceSetCompile`, `sourceSetCompileOnly`, and `sourceSetRuntimeOnly`.

### **`sourceSetAnnotationProcessor`**

Annotation processors used during compilation of this source set.

### **`sourceSetRuntime(Deprecated)`**

Runtime dependencies for the given source set. Used by `sourceSetCompile`. Superseded by `sourceSetImplementation`.

### **`sourceSetRuntimeOnly`**

Runtime only dependencies for the given source set.

### **`sourceSetRuntimeClasspath extends sourceSetRuntimeOnly, sourceSetRuntime, sourceSetCompileClasspath`**

Runtime classpath contains elements of the implementation, as well as runtime only elements.

§

## Publishing

### **`components.java`**

A [SoftwareComponent](#) for publishing the production JAR created by the `jar` task. This component includes the runtime dependency information for the JAR.

§

## Convention properties

The Java Plugin adds a number of convention properties to the project, shown below. You can use these properties in your build script as though they were properties of the project object.

§

## Directory properties

### **String** `reporting.baseDir`

The name of the directory to generate reports into, relative to the build directory. Default value: `reports`

### **(read-only) File** `reportsDir`

The directory to generate reports into. Default value: `buildDir/reports.baseDir`

### **String** `testResultsDirName`

The name of the directory to generate test result .xml files into, relative to the build directory. Default value: `test-results`

### **(read-only) File** `testResultsDir`

The directory to generate test result .xml files into. Default value: `buildDir/testResultsDirName`

### **String** `testReportDirName`

The name of the directory to generate the test report into, relative to the reports directory. Default value: `test-reports`

### **(read-only) File** `testReportDir`

The directory to generate the test report into. Default value: `reportsDir/testReportDirName`

### **String** `libsDirName`

The name of the directory to generate libraries into, relative to the build directory. Default value: `libs`

### **(read-only) File** `libsDir`

The directory to generate libraries into. Default value: `buildDir/libsDirName`

### **String** `distsDirName`

The name of the directory to generate distributions into, relative to the build directory. Default value: `dist`

### **(read-only) File** `distsDir`

The directory to generate distributions into. Default value: `buildDir/distsDirName`

### **String** `docsDirName`

The name of the directory to generate documentation into, relative to the build directory. Default value: `docs`

### **(read-only) File** `docsDir`

The directory to generate documentation into. Default value: `buildDir/docsDirName`

### **String** `dependencyCacheDirName`

The name of the directory to use to cache source dependency information, relative to the build directory. Default value: `dependency-cache`

§

## Other convention properties

**(read-only)** `SourceSetContainer` `sourceSets`

Contains the project's source sets. Default value: Not null `SourceSetContainer`

`JavaVersion` `sourceCompatibility`

Java version compatibility to use when compiling Java source. Default value: version of the current JVM in use `JavaVersion`. Can also set using a String or a Number, e.g. `'1.5'` or `1.5`.

`JavaVersion` `targetCompatibility`

Java version to generate classes for. Default value: `sourceCompatibility`. Can also set using a String or Number, e.g. `'1.5'` or `1.5`.

`String` `archivesBaseName`

The basename to use for archives, such as JAR or ZIP files. Default value: `projectName`

`Manifest` `manifest`

The manifest to include in all JAR files. Default value: an empty manifest.

These properties are provided by convention objects of type `JavaPluginConvention`, and `BasePluginConvention`.

§

## Javadoc

The `javadoc` task is an instance of `Javadoc`. It supports the core Javadoc options and the options of the standard doclet described in the reference documentation of the Javadoc executable. For a complete list of supported Javadoc options consult the API documentation of the following classes: `CoreJavadocOptions` and `StandardJavadocDocletOptions`.

§

## Javadoc properties

**FileCollection classpath**

Default value: `sourceSets.main.output + sourceSets.main.compileClasspath`

**FileTree source**

Default value: `sourceSets.main.allJava`. Can set using anything described in the section called “Understanding implicit conversion to file collections”.

**File destinationDir**

Default value: `docsDir/javadoc`

**String title**

Default value: The name and version of the project

§

## Clean

The `clean` task is an instance of `Delete`. It simply removes the directory denoted by its `dir` property.

§

## Clean properties

**File dir**

Default value: `buildDir`

§

## Resources

The Java plugin uses the `Copy` task for resource handling. It adds an instance for each source set in the project. You can find out more about the copy task in the section called “File copying in depth”.

§

## ProcessResources properties

**Object srcDirs**

Default value: `sourceSet.resources`. Can set using anything described in the section called “Understanding implicit conversion to file collections”.

**File destinationDir**

Default value: `sourceSet.output.resourcesDir`. Can set using anything described in the section called “File paths in depth”.

§

## CompileJava

The Java plugin adds a `JavaCompile` instance for each source set in the project. Some of the most common configuration options are shown below.

§

### Compile properties

`FileCollection` **classpath**

Default value: `sourceSet.compileClasspath`

`FileTree` **source**

Default value: `sourceSet.java`. Can set using anything described in the section called “Understanding implicit conversion to file collections”.

**File** **destinationDir**

Default value: `sourceSet.java.outputDir`

By default, the Java compiler runs in the Gradle process. Setting `options.fork` to `true` causes compilation to occur in a separate process. In the case of the Ant `javac` task, this means that a new process will be forked for each compile task, which can slow down compilation. Conversely, Gradle’s direct compiler integration (see above) will reuse the same compiler process as much as possible. In both cases, all fork options specified with `options.forkOptions` will be honored.

§

### Incremental Java compilation

Starting with Gradle 2.1, it is possible to compile Java incrementally. See the `JavaCompile` task for information on how to enable it.

The main goals for incremental compilation are:

Make incremental builds much faster.

Change as few output classes as possible. Classes that don’t need to be recompiled remain unchanged in the output directory. An example scenario when this is really useful is using JRebel - the fewer output classes are changed the quicker the JVM can use refreshed classes.

To help you understand how incremental compilation works, the following provides a high-level overview:

Gradle will recompile all classes *affected* by a change.

A class is *affected* if it has been changed or if it depends on another affected class. This works no matter if the other class is defined in the same project, another project or even an external library.

A class’s dependencies are determined from type references in its bytecode.

Since constants can be inlined, any change to a constant will result in Gradle recompiling all source files. For that reason, you should try to minimize the use of constants in your source code and replace them with static methods where possible.

Since source-retention annotations are not visible in bytecode, changes to a source-retention annotation will result in full recompilation.

You can improve incremental compilation performance by applying good software design principles like loose coupling. For instance, if you put an interface between a concrete class and its dependents, the dependent classes are only recompiled when the interface changes, but not when the implementation changes.

The class analysis is cached in the project directory, so the first build after a clean checkout can be slower. Consider turning off the incremental compiler on your build server.

§

#### Known issues

If a compile task fails due to a compile error, it will do a full compilation again the next time it is invoked.

§

#### Incremental annotation processing

Starting with Gradle 4.7, the incremental compiler also supports incremental annotation processing. Annotation processors need to opt in to this feature, otherwise they will trigger a full recompilation.

As a user you can see which annotation processors are triggering full recompilations in the `--info` log. Incremental annotation processing will be deactivated if a custom `executable` or `javaHome` is configured on the compile task.

§

#### Making an annotation processor incremental

Please first have a look at the section called “Incremental Java compilation”, as incremental annotation processing builds on top of it.

Gradle supports incremental compilation for two common categories of annotation processors: “isolating” and “aggregating”. Please consult the information below to decide which category fits your processor.

You can then register your processor for incremental compilation using a file in the processor’s META-INF directory. The format is one line per processor, with the fully qualified name of the processor class and its category separated by a comma.

#### Example 467. Registering incremental annotation processors

```
processor/src/main/resources/META-INF/gradle/incremental.annotation.processors
EntityProcessor,isolating
ServiceRegistryProcessor,dynamic
```



If your processor can only decide at runtime whether it is incremental or not, you can declare it as "dynamic" in the META-INF descriptor and return its true type at runtime using the `Processor#getSupportedOptions()` method.

#### Example 468. Registering incremental annotation processors dynamically

`processor/src/main/java/ServiceRegistryProcessor.java`

```
@Override
public Set<String> getSupportedOptions() {
    return Collections.singleton("org.gradle.annotation.processing.aggregating")
}
```

Both categories have the following limitations:

They must generate their files using the Filer API. Writing files any other way will result in silent failures later on, as these files won't be cleaned up correctly. If your processor does this, it cannot be incremental.

They must not depend on compiler-specific APIs like `com.sun.source.util.Trees`. Gradle wraps the processing APIs, so attempts to cast to compiler-specific types will fail. If your processor does this, it cannot be incremental, unless you have some fallback mechanism.

If they use `Filer#getResource`, Gradle will recompile all source files. See [gradle/issues/4701](#)

If they use `Filer#createResource`, Gradle will recompile all source files. See [gradle/issues/4702](#)

§

"Isolating" annotation processors

The fastest category, these look at each annotated element in isolation, creating generated files or validation messages for it. For instance an `EntityProcessor` could create a `<TypeName>Repository` for each type annotated with `@Entity`.

#### Example 469. An isolated annotation processor

`processor/src/main/java/EntityProcessor.java`

```
Set<? extends Element> entities = roundEnv.getElementsAnnotatedWith(entityAnnotation);
for (Element entity : entities) {
    createRepository((TypeElement) entity);
}
```

"Isolating" processors have the following limitations:

They must make all decisions (code generation, validation messages) for an annotated type based on information reachable from its AST. This means you can analyze the types' super-class, method return types, annotations etc., even transitively. But you cannot make decisions based on unrelated elements in the `RoundEnvironment`. Doing so will result in silent failures because too few files will be recompiled later. If your processor needs to make decisions based on a combination of otherwise unrelated elements, mark it as "aggregating" instead.

They must provide exactly one originating element for each file generated with the `Filer` API. If zero or many originating elements are provided, Gradle will recompile all source files.

When a source file is recompiled, Gradle will recompile all files generated from it. When a source file is deleted, the files generated from it are deleted.

§

"Aggregating" annotation processors

These can aggregate several source files into one or more output files or validation messages. For instance, a `ServiceRegistryProcessor` could create a single `ServiceRegistry` with one method for each type annotated with `@Service`

#### Example 470. An aggregating annotation processor

`processor/src/main/java/ServiceRegistryProcessor.java`

```
JavaFileObject serviceRegistry = filer.createSourceFile("ServiceRegistry");
Writer writer = serviceRegistry.openWriter();
writer.write("public class ServiceRegistry {");
for (Element service : roundEnv.getElementsAnnotatedWith(serviceAnnotation)) {
    addServiceCreationMethod(writer, (TypeElement) service);
}
writer.write("}");
writer.close();
```

"Aggregating" processors have the following limitations:

They can only read `CLASS` or `RUNTIME` retention annotations

They can only read parameter names if the user passes the `-parameters` compiler argument.

Gradle will always reprocess (but not recompile) all annotated files that the processor was registered for. Gradle will always recompile any files the processor generates.

§

### Compile avoidance

If a dependent project has changed in an ABI-compatible way (only its private API has changed), then Java compilation tasks will be up-to-date. This means that if project `A` depends on project `B` and a class in `B` is changed in an ABI-compatible way (typically, changing only the body of a method), then Gradle won't recompile `A`.

Some of the types of changes that do not affect the public API and are ignored:

Changing a method body

Changing a comment

Adding, removing or changing private methods, fields, or inner classes

Adding, removing or changing a resource

Changing the name of jars or directories in the classpath

Renaming a parameter

Compile-avoidance is deactivated if annotation processors are found on the compile classpath, because for annotation processors the implementation details matter. Annotation processors should be declared on the annotation processor path instead. Gradle 5.0 will ignore processors on the compile classpath.

#### Example 471. Declaring annotation processors

**build.gradle**

```
dependencies {  
    // The dagger compiler and its transitive dependencies will only be found on  
    annotationProcessor 'com.google.dagger:dagger-compiler:2.8'  
  
    // And we still need the Dagger library on the compile classpath itself  
    implementation 'com.google.dagger:dagger:2.8'  
}
```

§

## Test

The `test` task is an instance of `Test`. It automatically detects and executes all unit tests in the `test` source set. It also generates a report once test execution is complete. JUnit and TestNG are both supported. Have a look at `Test` for the complete API.

See the *Testing in Java & JVM projects* chapter for more details.

§

## Jar

The `jar` task creates a JAR file containing the class files and resources of the project. The JAR file is declared as an artifact in the `archives` dependency configuration. This means that the JAR is available in the classpath of a dependent project. If you upload your project into a repository, this JAR is declared as part of the dependency descriptor. You can learn more about how to work with archives in the section called “Archive creation in depth” and artifact configurations in *Legacy publishing*.

§

## Manifest

Each jar or war object has a `manifest` property with a separate instance of `Manifest`. When the archive is generated, a corresponding `MANIFEST.MF` file is written into the archive.

#### Example 472. Customization of MANIFEST.MF

##### build.gradle

```
jar {
    manifest {
        attributes("Implementation-Title": "Gradle",
                   "Implementation-Version": version)
    }
}
```

You can create stand-alone instances of a `Manifest`. You can use that for example, to share manifest information between jars.

#### Example 473. Creating a manifest object.

##### build.gradle

```
ext.sharedManifest = manifest {
    attributes("Implementation-Title": "Gradle",
               "Implementation-Version": version)
}
task fooJar(type: Jar) {
    manifest = project.manifest {
        from sharedManifest
    }
}
```

You can merge other manifests into any `Manifest` object. The other manifests might be either described by a file path or, like in the example above, by a reference to another `Manifest` object.

#### Example 474. Separate MANIFEST.MF for a particular archive

##### build.gradle

```
task barJar(type: Jar) {
    manifest {
        attributes key1: 'value1'
        from sharedManifest, 'src/config/basemanifest.txt'
        from('src/config/javabasemanifest.txt',
             'src/config/libbasemanifest.txt') {
            eachEntry { details ->
                if (details.baseValue != details.mergeValue) {
                    details.value = baseValue
                }
                if (details.key == 'foo') {
                    details.exclude()
                }
            }
        }
    }
}
```

Manifests are merged in the order they are declared by the `from` statement. If the base manifest and the merged manifest both define values for the same key, the merged manifest wins by default. You can fully customize the merge behavior by adding `eachEntry` actions in which you have access to a `ManifestMergeDetails` instance for each entry of the resulting manifest. The merge is not immediately triggered by the `from` statement. It is done lazily, either when generating the jar, or by calling `writeTo` or `eff`

You can easily write a manifest to disk.

#### **Example 475. Saving a MANIFEST.MF to disk**

**build.gradle**

```
jar.manifest.writeTo("$buildDir/mymanifest.mf")
```

# The Java Library Plugin

The Java Library plugin expands the capabilities of the Java plugin by providing specific knowledge about Java libraries. In particular, a Java library exposes an API to consumers (i.e., other projects using the Java or the Java Library plugin). All the source sets, tasks and configurations exposed by the Java plugin are implicitly available when using this plugin.

§

## Usage

To use the Java Library plugin, include the following in your build script:

**Example 476. Using the Java Library plugin**

```
build.gradle
apply plugin: 'java-library'
```

§

## API and implementation separation

The key difference between the standard Java plugin and the Java Library plugin is that the latter introduces the concept of an *API* exposed to consumers. A library is a Java component meant to be consumed by other components. It's a very common use case in multi-project builds, but also as soon as you have external dependencies.

The plugin exposes two configurations that can be used to declare dependencies: `api` and `implementation`. The `api` configuration should be used to declare dependencies which are exported by the library API, whereas the `implementation` configuration should be used to declare dependencies which are internal to the component.

**Example 477. Declaring API and implementation dependencies**

```
build.gradle
dependencies {
    api 'commons-httpclient:commons-httpclient:3.1'
    implementation 'org.apache.commons:commons-lang3:3.5'
}
```

Dependencies appearing in the `api` configurations will be transitively exposed to consumers of the library, and as such will appear on the compile classpath of consumers. Dependencies found in the `implementation` configuration will, on the other hand, not be exposed to consumers, and therefore not leak into the consumers' compile classpath. This comes with several benefits:

dependencies do not leak into the compile classpath of consumers anymore, so you will never accidentally depend on a transitive dependency

faster compilation thanks to reduced classpath size

less recompilations when implementation dependencies change: consumers would not need to be recompiled

cleaner publishing: when used in conjunction with the new `maven-publish` plugin, Java libraries produce POM files that distinguish exactly between what is required to compile against the library and what is required to use the library at runtime (in other words, don't mix what is needed to compile the library itself and what is needed to compile against the library).

**Note:** The `compile` configuration still exists but should not be used as it will not offer the guarantees that the `api` and `implementation` configurations provide.

If your build consumes a published module with POM metadata, the Java and Java Library plugins both honor `api` and `implementation` separation through the scopes used in the pom. Meaning that the compile classpath only includes `compile` scoped dependencies, while the runtime classpath adds the `runtime` scoped dependencies as well.

This often does not have an effect on modules published with Maven, where the POM that defines the project is directly published as metadata. There, the `compile` scope includes both dependencies that were required to compile the project (i.e. `implementation` dependencies) and dependencies required to compile against the published library (i.e. `API` dependencies). For most published libraries, this means that all dependencies belong to the `compile` scope. However, as mentioned above, if the library is published with Gradle, the produced POM file only puts `api` dependencies into the `compile` scope and the remaining `implementation` dependencies into the `runtime` scope.

**Note:** Separating compile and runtime scope of modules is active by default in Gradle 5.0+. In Gradle 4.6+, you need to activate it by adding `enableFeaturePreview('IMPROVED_POM_SUPPORT')` in `settings.gradle`.

§

## Recognizing API and implementation dependencies

This section will help you identify API and Implementation dependencies in your code using simple rules of thumb. The first of these is:

Prefer the `implementation` configuration over `api` when possible

This keeps the dependencies off of the consumer's compilation classpath. In addition, the consumers will immediately fail to compile if any implementation types accidentally leak into the public API.

So when should you use the `api` configuration? An API dependency is one that contains at least one type that is exposed in the library binary interface, often referred to as its ABI (Application Binary Interface). This includes, but is not limited to:

- types used in super classes or interfaces

- types used in public method parameters, including generic parameter types (where *public* is something that is visible to compilers. I.e. , *public*, *protected* and *package private* members in the Java world)

- types used in public fields

- public annotation types

By contrast, any type that is used in the following list is irrelevant to the ABI, and therefore should be declared as an `implementation` dependency:

- types exclusively used in method bodies

- types exclusively used in private members

- types exclusively found in internal classes (future versions of Gradle will let you declare which packages belong to the public API)

The following class makes use of a couple of third-party libraries, one of which is exposed in the class's public API and the other is only used internally. The import statements don't help us determine which is which, so we have to look at the fields, constructors and methods instead:



### Example 478. Making the difference between API and implementation

```
src/main/java/org/gradle/HttpClientWrapper.java
// The following types can appear anywhere in the code
// but say nothing about API or implementation usage
import org.apache.commons.httpclient.*;
import org.apache.commons.httpclient.methods.*;
import org.apache.commons.lang3.exception.ExceptionUtils;
import java.io.IOException;
import java.io.UnsupportedEncodingException;

public class HttpClientWrapper {

    private final HttpClient client; // private member: implementation details

    // HttpClient is used as a parameter of a public method
    // so "leaks" into the public API of this component
    public HttpClientWrapper(HttpClient client) {
        this.client = client;
    }

    // public methods belongs to your API
    public byte[] doRawGet(String url) {
        GetMethod method = new GetMethod(url);
        try {
            int statusCode = doGet(method);
            return method.getResponseBody();
        } catch (Exception e) {
            ExceptionUtils.rethrow(e); // this dependency is internal only
        } finally {
            method.releaseConnection();
        }
        return null;
    }

    // GetMethod is used in a private method, so doesn't belong to the API
    private int doGet(GetMethod method) throws Exception {
        int statusCode = client.executeMethod(method);
        if (statusCode != HttpStatus.SC_OK) {
            System.err.println("Method failed: " + method.getStatusLine());
        }
        return statusCode;
    }
}
```

The *public* constructor of `HttpClientWrapper` uses `HttpClient` as a parameter, so it is exposed to consumers and therefore belongs to the API. Note that `GetMethod` is used in the signature of a *private* method, and so it doesn't count towards making `HttpClient` an API dependency.

On the other hand, the `ExceptionUtils` type, coming from the `commons-lang` library, is only used in a method body (not in its signature), so it's an implementation dependency.

Therefore, we can deduce that `commons-httpclient` is an API dependency, whereas `commons-lang` is an implementation dependency. This conclusion translates into the following declaration in the build script:


#### Example 479. Declaring API and implementation dependencies

```
build.gradle
dependencies {
    api 'commons-httpclient:commons-httpclient:3.1'
    implementation 'org.apache.commons:commons-lang3:3.5'
}
```

§

## The Java Library plugin configurations

The following graph describes the main configurations setup when the Java Library plugin is in use.

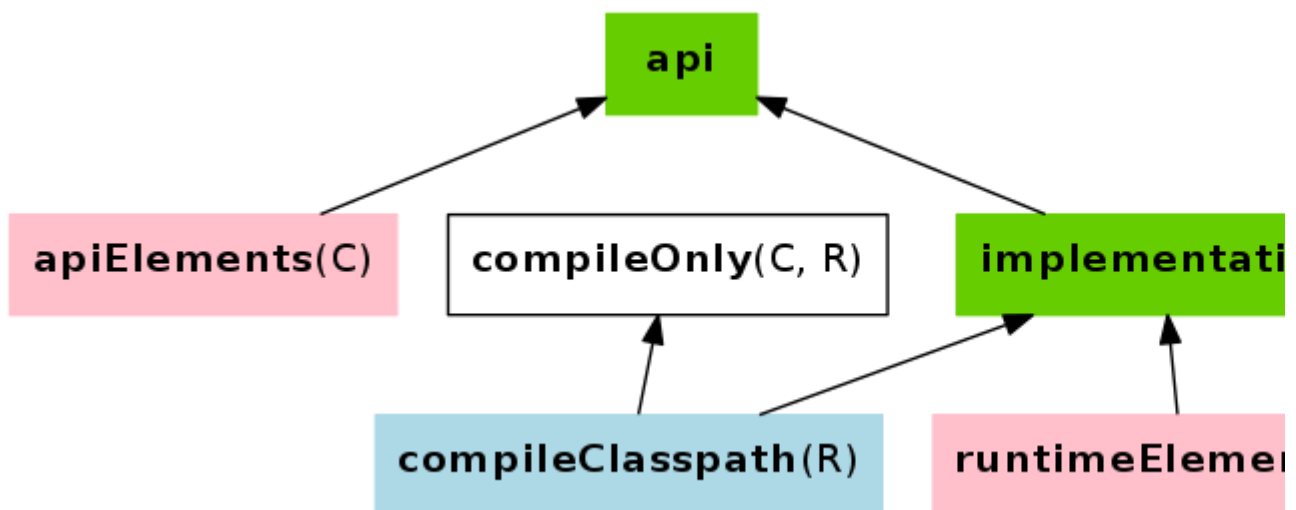


The configurations in *green* are the ones a user should use to declare dependencies

The configurations in *pink* are the ones used when a component compiles, or runs against the library

The configurations in *blue* are internal to the component, for its own use

The configurations in *white* are configurations inherited from the Java plugin

And the next graph describes the test configurations setup:

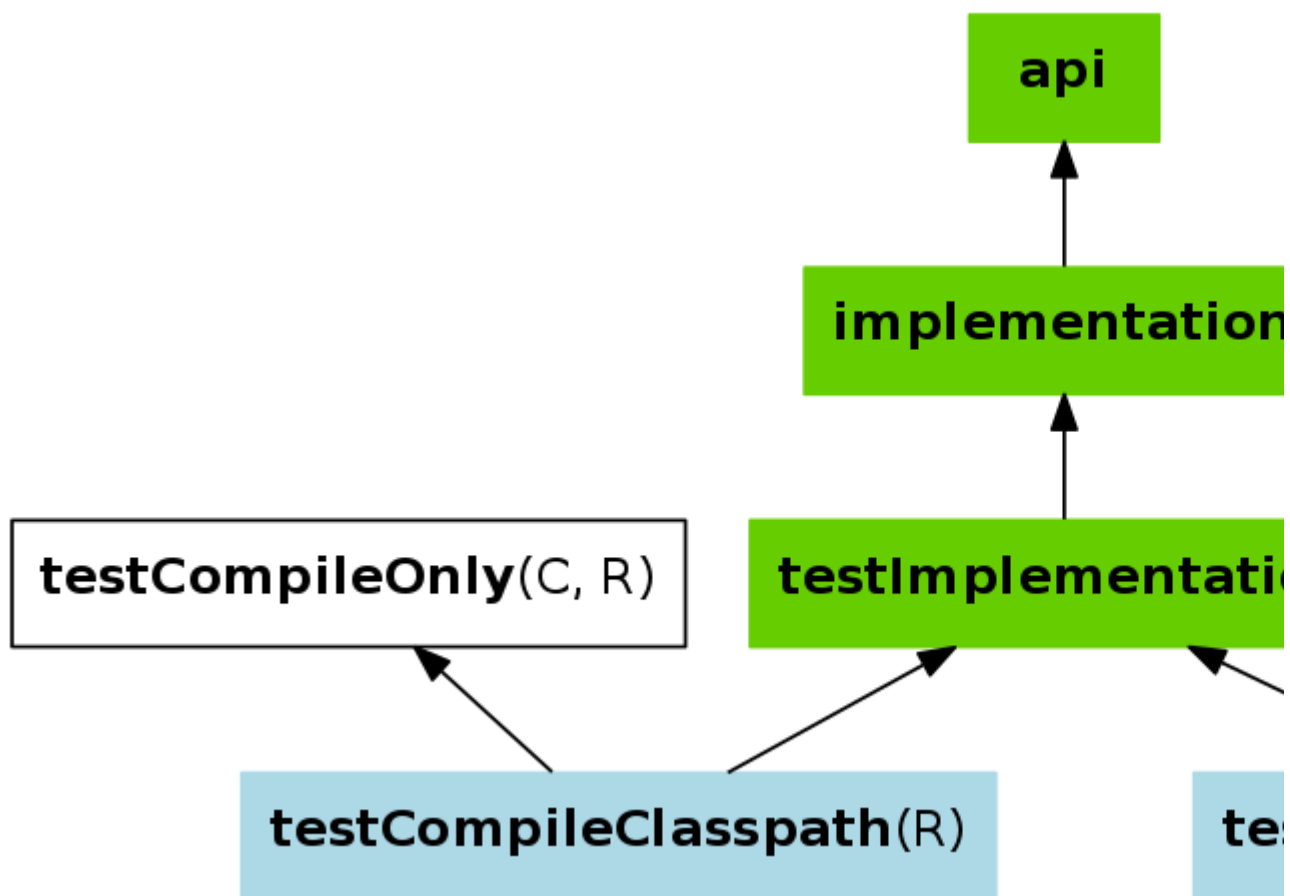

**Note:** The *compile*, *testCompile*, *runtime* and *testRuntime* configurations inherited from the Java plugin are still available but are deprecated. You should avoid using them, as they are only kept for backwards compatibility.

The role of each configuration is described in the following tables:

**Table 29. Java Library plugin - configurations used to declare dependencies**

Configuration name	Role	Can be consumed	Can be resolved	Description
api	Declaring API dependencies	no	no	This is where you should declare dependencies which are transitively exported to consumers, for compile.
implementation	Declaring implementation dependencies	no	no	This is where you should declare dependencies which are purely internal and not meant to be exposed to consumers.
compileOnly	Declaring compile only dependencies	yes	yes	This is where you should declare dependencies which are only required at compile time, but should not leak into the runtime. This typically includes dependencies which are shaded when found at runtime.
runtimeOnly	Declaring runtime dependencies	no	no	This is where you should declare dependencies which are only required at runtime, and not at compile time.
testImplementation	Test dependencies	no	no	This is where you should declare dependencies which are used to compile tests.
testCompileOnly	Declaring test compile only dependencies	yes	yes	This is where you should declare dependencies which are only required at test compile time, but should not leak into the runtime. This typically includes dependencies which are shaded when found at runtime.
testRuntimeOnly	Declaring test runtime dependencies	no	no	This is where you should declare dependencies which are only required at test runtime, and not at test compile time.

**Table 30. Java Library plugin - configurations used by consumers**

Configuration name	Role	Can be consumed	Can be resolved	Description
apiElements	For compiling against this library	yes	no	This configuration is meant to be used by consumers, to retrieve all the elements necessary to compile against this library. Unlike the default configuration, this doesn't leak implementation or runtime dependencies.
runtimeElements	For executing this library	yes	no	This configuration is meant to be used by consumers, to retrieve all the elements necessary to run against this library.

**Table 31. Java Library plugin - configurations used by the library itself**

Configuration name	Role	Can be consumed	Can be resolved	Description
compileClasspath	For compiling this library	no	yes	This configuration contains the compile classpath of this library, and is therefore used when invoking the java compiler to compile it.
runtimeClasspath	For executing this library	no	yes	This configuration contains the runtime classpath of this library
testCompileClasspath	For compiling the tests of this library	no	yes	This configuration contains the test compile classpath of this library.
testRuntimeClasspath	For executing tests of this library	no	yes	This configuration contains the test runtime classpath of this library

§

## Known issues

§

### Compatibility with other plugins

At the moment the Java Library plugin is only wired to behave correctly with the `java` plugin. Other plugins, such as the Groovy plugin, may not behave correctly. In particular, if the Groovy plugin is used in addition to the `java-library` plugin, then consumers may not get the Groovy classes when they consume the library. To workaround this, you need to explicitly wire the Groovy compile dependency, like this:

#### Example 480. Configuring the Groovy plugin to work with Java Library

**a/build.gradle**

```
configurations {
    apiElements {
        outgoing.variants.getByName('classes').artifact(
            file: compileGroovy.destinationDir,
            type: ArtifactTypeDefinition.JVM_CLASS_DIRECTORY,
            builtBy: compileGroovy)
    }
}
```

§

## Increased memory usage for consumers

When a project uses the Java Library plugin, consumers will use the output classes directory of this project directly on their compile classpath, instead of the jar file if the project uses the Java plugin. An indirect consequence is that up-to-date checking will require more memory, because Gradle will snapshot individual class files instead of a single jar. This may lead to increased memory consumption for large projects.

# Web Application Quickstart

**Note:** This chapter is a work in progress.

This chapter introduces the Gradle support for web applications. Gradle recommends two plugins for web application development: the War plugin and the Gretty plugin. The War plugin extends the Java plugin to build a WAR file for your project. The Gretty plugin allows you to deploy your web application to an embedded Jetty web container.

§

## Building a WAR file

To build a WAR file, you apply the War plugin to your project:

### Example 481. War plugin

**build.gradle**

```
plugins {  
    id 'war'  
}
```

**Note:** The code for this example can be found at `samples/webApplication/quickstart` in the ‘-all’ distribution of Gradle.

This also applies the Java plugin to your project. Running `gradle build` will compile, test and WAR your project. Gradle will look for the source files to include in the WAR file in `src/main/webapp`. Your compiled classes and their runtime dependencies are also included in the WAR file, in the `WEB-INF/classes` and `WEB-INF/lib` directories, respectively.

### Groovy web applications

You can combine multiple plugins in a single project, so you can use the War and Groovy plugins together to build a Groovy based web application. The appropriate Groovy libraries will be added to the WAR file for you.

§

## Running your web application

To run your web application, you apply the Gretty plugin to your project:

### Example 482. Running web application with Gretty plugin

**build.gradle**

```
plugins {  
    id "org.gretty" version "2.2.0"  
}
```

This also applies the War plugin to your project. Running `gradle appRun` will run your web application in an embedded servlet container. Running `gradle appRunWar` will build the WAR file, and then run it in an embedded web container.

§

## Summary

You can find out more about the War plugin in *The War Plugin*. You can find more sample Java projects in the `samples/webApplication` directory in the Gradle distribution.



# The War Plugin

The War plugin extends the Java plugin to add support for assembling web application WAR files. It disables the default JAR archive generation of the Java plugin and adds a default WAR archive task.

§

## Usage

To use the War plugin, include the following in your build script:

### Example 483. Using the War plugin

```
build.gradle
plugins {
    id 'war'
}
```

§

## Project layout

In addition to the standard Java project layout, the War Plugin adds:

```
src/main/webapp
    Web application sources
```

§

## Tasks

The War plugin adds and modifies the following tasks:


**war** — type: `War`  
*Depends on:* `compile`

Assembles the application WAR file.

**assemble** - *lifecycle task*  
*Depends on:* `war`

The War plugin adds the following dependencies to tasks added by the Java plugin;

Figure 32. War plugin - tasks



§

## Dependency management

The War plugin adds two dependency configurations:

`providedCompile`

`providedRuntime`

These two configurations have the same scope as the respective `compile` and `runtime` configurations, except that they are not added to the WAR archive.

It is important to note that these `provided` configurations work transitively. Let's say you add `commons-httpclient` to any of the provided configurations. This dependency has a dependency on `commons-codec`. Because this is a “provided” configuration, this means that neither of these dependencies will be added to your WAR, even if the `commons-codec` library is an explicit dependency of your `compile` configuration. If you don't want this transitive behavior, simply declare your `provided` dependencies like `commons-httpclient:commons-httpclient:jar:3.1`.

§

## Publishing

`components.web`

A `SoftwareComponent` for publishing the production WAR created by the `war` task.

§

## Convention properties

`webAppDirName` — `String`

*Default value:* `src/main/webapp`

The name of the web application source directory, relative to the project directory.

`webAppDir` — **(read-only)** `File`

*Default value:* `$webAppDirName`, e.g. `src/main/webapp`

The path to the web application source directory.

These properties are provided by a [WarPluginConvention](#) object.

§

## War

The default behavior of the `War` task is to copy the content of `src/main/webapp` to the root of the archive. Your `webapp` directory may of course contain a `WEB-INF` sub-directory, which may contain a `web.xml` file. Your compiled classes are compiled to `WEB-INF/classes`. All the dependencies of the `runtime` <sup>[16]</sup> configuration are copied to `WEB-INF/lib`.

The [War](#) class in the API documentation has additional useful information.

§

## Customizing

Here is an example with the most important customization options:

#### Example 484. Customization of war plugin

##### build.gradle

```
configurations {
    moreLibs
}

repositories {
    flatDir { dirs "lib" }
    jcenter()
}

dependencies {
    compile module(":compile:1.0") {
        dependency ":compile-transitive-1.0@jar"
        dependency ":providedCompile-transitive:1.0@jar"
    }
    providedCompile "javax.servlet:servlet-api:2.5"
    providedCompile module(":providedCompile:1.0") {
        dependency ":providedCompile-transitive:1.0@jar"
    }
    runtime ":runtime:1.0"
    providedRuntime ":providedRuntime:1.0@jar"
    testCompile "junit:junit:4.12"
    moreLibs ":otherLib:1.0"
}

war {
    from 'src/rootContent' // adds a file-set to the root of the archive
    webInf { from 'src/additionalWebInf' } // adds a file-set to the WEB-INF dir
    classpath fileTree('additionalLibs') // adds a file-set to the WEB-INF/lib d.
    classpath configurations.moreLibs // adds a configuration to the WEB-INF/lib
    webXml = file('src/someWeb.xml') // copies a file to WEB-INF/web.xml
}
```

Of course one can configure the different file-sets with a closure to define excludes and includes.

---

[16] The runtime configuration extends the compile configuration.

# The Ear Plugin

The Ear plugin adds support for assembling web application EAR files. It adds a default EAR archive task. It doesn't require the Java plugin, but for projects that also use the Java plugin it disables the default JAR archive generation.

§

## Usage

To use the Ear plugin, include the following in your build script:

**Example 485. Using the Ear plugin**

```
build.gradle
apply plugin: 'ear'
```

§

## Tasks

The Ear plugin adds the following tasks to the project.

**Table 32. Ear plugin - tasks**

task name	Depends on	Type	Description
ear	compile (only if the Java plugin is also applied)	Ear	Assembles the application EAR file.

The Ear plugin adds the following dependencies to tasks added by the base plugin.

**Table 33. Ear plugin - additional task dependencies**

task name	Depends on
assemble	ear

§

## Project layout

**Table 34. Ear plugin - project layout**

Directory	Meaning
<code>src/main/application</code>	Ear resources, such as a META-INF directory

§

## Dependency management

The Ear plugin adds two dependency configurations: `deploy` and `earlib`. All dependencies in the `deploy` configuration are placed in the root of the EAR archive, and are *not* transitive. All dependencies in the `earlib` configuration are placed in the 'lib' directory in the EAR archive and *are* transitive.

§

## Convention properties

**Table 35. Ear plugin - directory properties**

Property name	Type	Default value	Description
<code>appDirName</code>	<code>String</code>	<code>src/main/application</code>	The name of the application source directory, relative to the project directory.
<code>libDirName</code>	<code>String</code>	<code>lib</code>	The name of the lib directory inside the generated EAR.
<code>deploymentDescriptor</code>	<code>org.gradle.plugins.ear.descriptor.DeploymentDescriptor</code>	A deployment descriptor with sensible defaults named <code>application.xml</code>	Metadata to generate a deployment descriptor file, e.g. <code>application.xml</code> . If this file already exists in the <code>appDirName/META-INF</code> directory, then the existing file contents will be used and the explicit configuration in the <code>ear.deploymentDescriptor</code> will be ignored.

These properties are provided by a `EarPluginConvention` convention object.

§

## Ear

The default behavior of the Ear task is to copy the content of `src/main/application` to the root of the archive. If your `application` directory doesn't contain a `META-INF/application.xml` deployment descriptor then one will be generated for you.

The [Ear](#) class in the API documentation has additional useful information.

§

## Customizing

Here is an example with the most important customization options:

## Example 486. Customization of ear plugin

### build.gradle

```
apply plugin: 'ear'
apply plugin: 'java'

repositories { mavenCentral() }

dependencies {
    // The following dependencies will be the ear modules and
    // will be placed in the ear root
    deploy project(path: ':war', configuration: 'archives')

    // The following dependencies will become ear libs and will
    // be placed in a dir configured via the libDirName property
    earlib group: 'log4j', name: 'log4j', version: '1.2.15', ext: 'jar'
}

ear {
    appDirName 'src/main/app' // use application metadata found in this folder
    // put dependent libraries into APP-INF/lib inside the generated EAR
    libDirName 'APP-INF/lib'
    deploymentDescriptor { // custom entries for application.xml:
        // fileName = "application.xml" // same as the default value
        // version = "6" // same as the default value
        applicationName = "customear"
        initializeInOrder = true
        displayName = "Custom Ear" // defaults to project.name
        // defaults to project.description if not set
        description = "My customized EAR for the Gradle documentation"
        // libraryDirectory = "APP-INF/lib" // not needed, above libDirName setting
        // module("my.jar", "java") // won't deploy as my.jar isn't deploy dependent
        // webModule("my.war", "/") // won't deploy as my.war isn't deploy dependent
        securityRole "admin"
        securityRole "superadmin"
        withXml { provider -> // add a custom node to the XML
            provider.asNode().appendNode("data-source", "my/data/source")
        }
    }
}
```

You can also use customization options that the `Ear` task provides, such as `from` and `metaInf`.



## §

### Using custom descriptor file

You may already have appropriate settings in a `application.xml` file and want to use that instead of configuring the `ear.deploymentDescriptor` section of the build script. To accommodate that goal, place the `META-INF/application.xml` in the right place inside your source folders (see the `appDirName` property). The file contents will be used and the explicit configuration in the `ear.deploymentDescriptor` will be ignored.

# The Jetty Plugin

**Note:** This plugin has been removed as of Gradle 4.0. We recommend using the Gretty plugin instead.

# The Application Plugin

The Application plugin facilitates creating an executable JVM application. It makes it easy to start the application locally during development, and to package the application as a TAR and/or ZIP including operating system specific start scripts.

Applying the Application plugin also implicitly applies the Java plugin. The `main` source set is effectively the “application”.

Applying the Application plugin also implicitly applies the Distribution plugin. A `main` distribution is created that packages up the application, including code dependencies and generated start scripts.

§

## Usage

To use the application plugin, include the following in your build script:

### Example 487. Using the application plugin

```
build.gradle
apply plugin: 'application'
```

The only mandatory configuration for the plugin is the specification of the main class (i.e. entry point) of the application.

### Example 488. Configure the application main class

```
build.gradle
mainClassName = "org.gradle.sample.Main"
```

You can run the application by executing the `run` task (type: `JavaExec`). This will compile the main source set, and launch a new JVM with its classes (along with all runtime dependencies) as the classpath and using the specified main class. You can launch the application in debug mode with `gradle run --debug-jvm` (see `JavaExec.setDebug(boolean)`).

Since Gradle 4.9, the command line arguments can be passed with `--args`. For example, if you want to launch the application with command line arguments `foo --bar`, you can use `gradle run --args 'foo --bar'` (see `JavaExec.setArgsString(java.lang.String)`).

If your application requires a specific set of JVM settings or system properties, you can configure the `applicationDefaultJvmArgs` property. These JVM arguments are applied to the `run` task and also considered in the generated start scripts of your distribution.

**Example 489. Configure default JVM settings**

**build.gradle**

```
applicationDefaultJvmArgs = [ "-Dgreeting.language=en" ]
```

If your application's start scripts should be in a different directory than `bin`, you can configure the `executableDir` property.

**Example 490. Configure custom directory for start scripts**

**build.gradle**

```
executableDir = "custom_bin_dir"
```

§

**The distribution**

A distribution of the application can be created, by way of the Distribution plugin (which is automatically applied). A `main` distribution is created with the following content:

**Table 36. Distribution content**

Location	Content
Root dir)	<code>src/dist</code>
<code>lib</code>	All runtime dependencies and main source set class files.
<code>bin</code>	Start scripts (generated by <code>createStartScripts</code> task).

Static files to be added to the distribution can be simply added to `src/dist`. More advanced customization can be done by configuring the `CopySpec` exposed by the main distribution.

#### Example 491. Include output from other tasks in the application distribution

##### build.gradle

```
task createDocs {
    def docs = file("$buildDir/docs")
    outputs.dir docs
    doLast {
        docs.mkdirs()
        new File(docs, "readme.txt").write("Read me!")
    }
}

distributions {
    main {
        contents {
            from(createDocs) {
                into "docs"
            }
        }
    }
}
```

By specifying that the distribution should include the task's output files (see the section called “Task inputs and outputs”), Gradle knows that the task that produces the files must be invoked before the distribution can be assembled and will take care of this for you.

#### Example 492. Automatically creating files for distribution

##### Output of `gradle distZip`

```
> gradle distZip
> Task :createDocs
> Task :compileJava
> Task :processResources NO-SOURCE
> Task :classes
> Task :jar
> Task :startScripts
> Task :distZip
```

BUILD SUCCESSFUL in 0s

5 actionable tasks: 5 executed

You can run `gradle installDist` to create an image of the application in `build/install/projectName`. You can run `gradle distZip` to create a ZIP containing the distribution, `gradle distTar` to create an application TAR or `gradle assemble` to build both.

§

## Customizing start script generation

The application plugin can generate Unix (suitable for Linux, macOS etc.) and Windows start scripts out of the box. The start scripts launch a JVM with the specified settings defined as part of the original build and runtime environment (e.g. `JAVA_OPTS` env var). The default script templates are based on the same scripts used to launch Gradle itself, that ship as part of a Gradle distribution.

The start scripts are completely customizable. Please refer to the documentation of [CreateStartScripts](#) for more details and customization examples.

§

## Tasks

The Application plugin adds the following tasks to the project.

**Table 37. Application plugin - tasks**

Task name	Depends on	Type	Description
<code>run</code>	<code>classes</code>	<a href="#">JavaExec</a>	Starts the application.
<code>startScripts</code>	<code>jar</code>	<a href="#">CreateStartScripts</a>	Creates OS specific scripts to run the project as a JVM application.
<code>installDist</code>	<code>jar</code> , <code>startScripts</code>	<a href="#">Sync</a>	Installs the application into a specified directory.
<code>distZip</code>	<code>jar</code> , <code>startScripts</code>	<a href="#">Zip</a>	Creates a full distribution ZIP archive including runtime libraries and OS specific scripts.
<code>distTar</code>	<code>jar</code> , <code>startScripts</code>	<a href="#">Tar</a>	Creates a full distribution TAR archive including runtime libraries and OS specific scripts.

§

## Convention properties

The application plugin adds some properties to the project, which you can use to configure its behaviour. See the [Project](#) class in the API documentation.

# The Java Library Distribution Plugin

**Note:** The Java library distribution plugin is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The Java library distribution plugin adds support for building a distribution ZIP for a Java library. The distribution contains the JAR file for the library and its dependencies.

§

## Usage

To use the Java library distribution plugin, include the following in your build script:

### Example 493. Using the Java library distribution plugin

```
build.gradle
apply plugin: 'java-library-distribution'
```

To define the name for the distribution you have to set the `baseName` property as shown below:

### Example 494. Configure the distribution name

```
build.gradle
distributions {
    main {
        baseName = 'my-name'
    }
}
```

The plugin builds a distribution for your library. The distribution will package up the runtime dependencies of the library. All files stored in `src/main/dist` will be added to the root of the archive distribution. You can run “`gradle distZip`” to create a ZIP file containing the distribution.

§

## Tasks

The Java library distribution plugin adds the following tasks to the project.

**Table 38. Java library distribution plugin - tasks**

task name	Depends on	Type	Description
distZip	jar	zip	Creates a full distribution ZIP archive including runtime libraries.

## §

### Including other resources in the distribution

All of the files from the `src/dist` directory are copied. To include any static files in the distribution, simply arrange them in the `src/dist` directory, or add them to the content of the distribution.

#### Example 495. Include files in the distribution

##### **build.gradle**

```
distributions {  
    main {  
        baseName = 'my-name'  
        contents {  
            from { 'src/dist' }  
        }  
    }  
}
```



# Groovy Quickstart

To build a Groovy project, you use the *Groovy plugin*. This plugin extends the Java plugin to add Groovy compilation capabilities to your project. Your project can contain Groovy source code, Java source code, or a mix of the two. In every other respect, a Groovy project is identical to a Java project, which we have already seen in *Java Quickstart*.

## §

### A basic Groovy project

Let's look at an example. To use the Groovy plugin, add the following to your build file:

#### Example 496. Groovy plugin

**build.gradle**

```
apply plugin: 'groovy'
```

**Note:** The code for this example can be found at `samples/groovy/quickstart` in the ‘-all’ distribution of Gradle.

This will also apply the Java plugin to the project, if it has not already been applied. The Groovy plugin extends the `compile` task to look for source files in directory `src/main/groovy`, and the `compileTest` task to look for test source files in directory `src/test/groovy`. The compile tasks use joint compilation for these directories, which means they can contain a mixture of Java and Groovy source files.

To use the Groovy compilation tasks, you must also declare the Groovy version to use and where to find the Groovy libraries. You do this by adding a dependency to the `groovy` configuration. The `compile` configuration inherits this dependency, so the Groovy libraries will be included in classpath when compiling Groovy and Java source. For our sample, we will use Groovy 2.2.0 from the public Maven repository:

### Example 497. Dependency on Groovy

#### build.gradle

```
repositories {
    mavenCentral()
}

dependencies {
    compile 'org.codehaus.groovy:groovy-all:2.4.10'
}
```

Here is our complete build file:

### Example 498. Groovy example - complete build file

#### build.gradle

```
apply plugin: 'eclipse'
apply plugin: 'groovy'

repositories {
    mavenCentral()
}

dependencies {
    compile 'org.codehaus.groovy:groovy-all:2.4.10'
    testCompile 'junit:junit:4.12'
}
```

Running `gradle build` will compile, test and JAR your project.

§

## Summary

This chapter describes a very simple Groovy project. Usually, a real project will require more than this. Because a Groovy project *is* a Java project, whatever you can do with a Java project, you can also do with a Groovy project.

You can find out more about the Groovy plugin in *The Groovy Plugin*, and you can find more sample Groovy projects in the `samples/groovy` directory in the Gradle distribution.

# The Groovy Plugin

The Groovy plugin extends the Java plugin to add support for Groovy projects. It can deal with Groovy code, mixed Groovy and Java code, and even pure Java code (although we don't necessarily recommend to use it for the latter). The plugin supports *joint compilation*, which allows you to freely mix and match Groovy and Java code, with dependencies in both directions. For example, a Groovy class can extend a Java class that in turn extends a Groovy class. This makes it possible to use the best language for the job, and to rewrite any class in the other language if needed.

§

## Usage

To use the Groovy plugin, include the following in your build script:

**Example 499. Using the Groovy plugin**

**build.gradle**

```
apply plugin: 'groovy'
```

§

## Tasks

The Groovy plugin adds the following tasks to the project.

**Table 39. Groovy plugin - tasks**


task name	Depends on	Type	Description
compileGroovy	compileJava	<a href="#">GroovyCompile</a>	Compiles production Groovy source files.
compileTestGroovy	compileTestJava	<a href="#">GroovyCompile</a>	Compiles test Groovy source files.
compileSourceSetGroovy	compileSourceSetJava	<a href="#">GroovyCompile</a>	Compiles the given source set's Groovy source files.
groovydoc	-	<a href="#">Groovydoc</a>	Generates API documentation for the production Groovy source files.

The Groovy plugin adds the following dependencies to tasks added by the Java plugin.

**Table 40. Groovy plugin - additional task dependencies**

task name	Depends on
<code>classes</code>	<code>compileGroovy</code>
<code>testClasses</code>	<code>compileTestGroovy</code>
<code>sourceSetClasses</code>	<code>compileSourceSetGroovy</code>

**Figure 33. Groovy plugin - tasks**

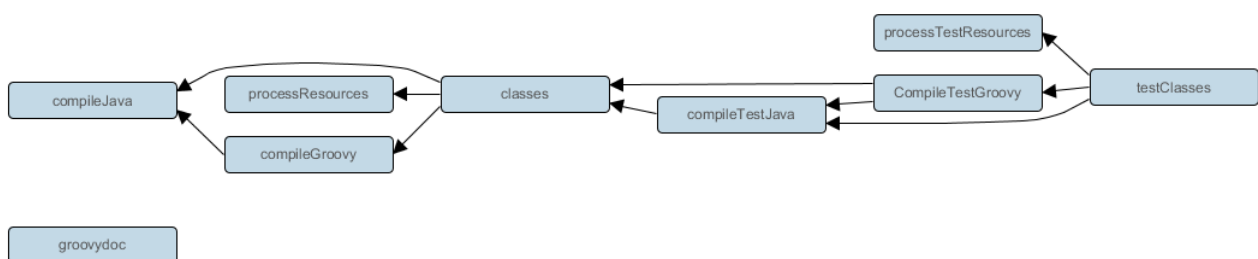

## §

### Project layout

The Groovy plugin assumes the project layout shown in `src/main/java`. All the Groovy source directories can contain Groovy *and* Java code. The Java source directories may only contain Java source code.<sup>[17]</sup> None of these directories need to exist or have anything in them; the Groovy plugin will simply compile whatever it finds.

#### `src/main/java`

Production Java source.

#### `src/main/resources`

Production resources, such as XML and properties files.

#### `src/main/groovy`

Production Groovy source. May also contain Java source files for joint compilation.

#### `src/test/java`

Test Java source.

#### `src/test/resources`

Test resources.

**src/test/groovy**

Test Groovy source. May also contain Java source files for joint compilation.

**src/sourceSet/java**

Java source for the source set named *sourceSet*.

**src/sourceSet/resources**

Resources for the source set named *sourceSet*.

**src/sourceSet/groovy**

Groovy source files for the given source set. May also contain Java source files for joint compilation.

§

## Changing the project layout

Just like the Java plugin, the Groovy plugin allows you to configure custom locations for Groovy production and test source files.

### Example 500. Custom Groovy source layout

**build.gradle**

```
sourceSets {
    main {
        groovy {
            srcDirs = ['src/groovy']
        }
    }

    test {
        groovy {
            srcDirs = ['test/groovy']
        }
    }
}
```

§

## Dependency management

Because Gradle's build language is based on Groovy, and parts of Gradle are implemented in Groovy, Gradle already ships with a Groovy library. Nevertheless, Groovy projects need to explicitly declare a Groovy dependency. This dependency will then be used on compile and runtime class paths. It will also be used to get hold of the Groovy compiler and Groovydoc tool, respectively.

If Groovy is used for production code, the Groovy dependency should be added to the `compile` configuration:

### Example 501. Configuration of Groovy dependency

```
build.gradle
repositories {
    mavenCentral()
}

dependencies {
    compile 'org.codehaus.groovy:groovy-all:2.4.10'
}
```

If Groovy is only used for test code, the Groovy dependency should be added to the `testCompile` configuration:

### Example 502. Configuration of Groovy test dependency

```
build.gradle
dependencies {
    testCompile 'org.codehaus.groovy:groovy-all:2.4.10'
}
```

To use the Groovy library that ships with Gradle, declare a `localGroovy()` dependency. Note that different Gradle versions ship with different Groovy versions; as such, using `localGroovy()` is less safe than declaring a regular Groovy dependency.

### Example 503. Configuration of bundled Groovy dependency

```
build.gradle
dependencies {
    compile localGroovy()
}
```

The Groovy library doesn't necessarily have to come from a remote repository. It could also come from a local `lib` directory, perhaps checked in to source control:

### Example 504. Configuration of Groovy file dependency

#### build.gradle

```
repositories {
    flatDir { dirs 'lib' }
}

dependencies {
    compile module('org.codehaus.groovy:groovy:2.4.10') {
        dependency('org.ow2.asm:asm-all:5.0.3')
        dependency('antlr:antlr:2.7.7')
        dependency('commons-cli:commons-cli:1.2')
        module('org.apache.ant:ant:1.9.4') {
            dependencies('org.apache.ant:ant-junit:1.9.4@jar',
                'org.apache.ant:ant-launcher:1.9.4')
        }
    }
}
```

## §

### Automatic configuration of groovyClasspath

The `GroovyCompile` and `Groovydoc` tasks consume Groovy code in two ways: on their `classpath`, and on their `groovyClasspath`. The former is used to locate classes referenced by the source code, and will typically contain the Groovy library along with other libraries. The latter is used to load and execute the Groovy compiler and Groovydoc tool, respectively, and should only contain the Groovy library and its dependencies.

Unless a task's `groovyClasspath` is configured explicitly, the Groovy (base) plugin will try to infer it from the task's `classpath`. This is done as follows:

If a `groovy-all(-indy)` Jar is found on `classpath`, that jar will be added to `groovyClasspath`.

If a `groovy(-indy)` jar is found on `classpath`, and the project has at least one repository declared, a corresponding `groovy(-indy)` repository dependency will be added to `groovyClasspath`.

Otherwise, execution of the task will fail with a message saying that `groovyClasspath` could not be inferred.

Note that the “-indy” variation of each jar refers to the version with `invokedynamic` support.

## §

### Convention properties

The Groovy plugin does not add any convention properties to the project.

§

## Source set properties

The Groovy plugin adds the following convention properties to each source set in the project. You can use these properties in your build script as though they were properties of the source set object.

**Table 41. Groovy plugin - source set properties**

roperty name	Type	Default value	Description
<code>roovy</code>	<code>SourceDirectorySet</code> (read-only)	Not null	The Groovy source files of this source set. Contains all <code>.groovy</code> and <code>.java</code> files found in the Groovy source directories, and excludes all other types of files.
<code>roovy.srcDirs</code>	<code>Set&lt;File&gt;</code> . Can set using anything described in the section called “Understanding implicit conversion to file collections”.	<code>[projectDir]</code>	The source directories containing the Groovy source files of this source set. May also contain Java source files for joint compilation.
<code>llGroovy</code>	<code>FileTree</code> (read-only)	Not null	All Groovy source files of this source set. Contains only the <code>.groovy</code> files found in the Groovy source directories.

These properties are provided by a convention object of type `GroovySourceSet`.

The Groovy plugin also modifies some source set properties:

**Table 42. Groovy plugin - source set properties**

roperty name	Change
<code>llJava</code>	Adds all <code>.java</code> files found in the Groovy source directories.
<code>llSource</code>	Adds all source files found in the Groovy source directories.

§

## GroovyCompile

The Groovy plugin adds a `GroovyCompile` task for each source set in the project. The task type extends the `JavaCompile` task (see the section called “Compiling your code”). The `GroovyCompile` task supports most configuration options of the official Groovy compiler.



**Table 43. Groovy plugin - GroovyCompile properties**

Task Property	Type	Default Value
classpath	<code>FileCollection</code>	<code>sourceSet.compileClasspath</code>
source	<code>FileTree</code> . Can set using anything described in the section called “Understanding implicit conversion to file collections”.	<code>sourceSet.groovy</code>
destinationDir	<code>File</code> .	<code>sourceSet.groovy.outputDir</code>
groovyClasspath	<code>FileCollection</code>	<code>groovy</code> configuration if non-empty; Groovy library found on classpath otherwise

## §

### Compiling and testing for Java 6 or Java 7

The Groovy compiler will always be executed with the same version of Java that was used to start Gradle. You should set `sourceCompatibility` and `targetCompatibility` to 1.6 or 1.7. If you also have Java source files, you can follow the same steps as for the Java plugin to ensure the correct Java compiler is used.

### Example 505. Configure Java 6 build for Groovy

#### **gradle.properties**

```
# in $HOME/.gradle/gradle.properties
java6Home=/Library/Java/JavaVirtualMachines/1.6.0.jdk/Contents/Home
```

#### **build.gradle**

```
sourceCompatibility = 1.6
targetCompatibility = 1.6

assert hasProperty('java6Home') : "Set the property 'java6Home' in your your gradle.properties"
def javaExecutablesPath = new File(java6Home, 'bin')
def javaExecutables = [:].withDefault { execName ->
    def executable = new File(javaExecutablesPath, execName)
    assert executable.exists() : "There is no ${execName} executable in ${java6Home}"
    executable
}
tasks.withType(AbstractCompile) {
    options.with {
        fork = true
        forkOptions.javaHome = file(java6Home)
    }
}
tasks.withType(Javadoc) {
    executable = javaExecutables.javadoc
}
tasks.withType(Test) {
    executable = javaExecutables.java
}
tasks.withType(JavaExec) {
    executable = javaExecutables.java
}
```

---

[17] We are using the same conventions as introduced by Russel Winder's Gant tool (<https://gant.github.io/>).

# The Scala Plugin

The Scala plugin extends the Java plugin to add support for Scala projects. It can deal with Scala code, mixed Scala and Java code, and even pure Java code (although we don't necessarily recommend to use it for the latter). The plugin supports *joint compilation*, which allows you to freely mix and match Scala and Java code, with dependencies in both directions. For example, a Scala class can extend a Java class that in turn extends a Scala class. This makes it possible to use the best language for the job, and to rewrite any class in the other language if needed.

§

## Usage

To use the Scala plugin, include the following in your build script:

### Example 506. Using the Scala plugin

**build.gradle**

```
apply plugin: 'scala'
```

§

## Tasks

The Scala plugin adds the following tasks to the project.

**Table 44. Scala plugin - tasks**


task name	Depends on	Type	Description
<code>compileScala</code>	<code>compileJava</code>	<a href="#">ScalaCompile</a>	Compiles production Scala source files.
<code>compileTestScala</code>	<code>compileTestJava</code>	<a href="#">ScalaCompile</a>	Compiles test Scala source files.
<code>compileSourceSetScala</code>	<code>compileSourceSetJava</code>	<a href="#">ScalaCompile</a>	Compiles the given source set's Scala source files.
<code>scaladoc</code>	-	<a href="#">ScalaDoc</a>	Generates API documentation for the production Scala source files.

The Scala plugin adds the following dependencies to tasks added by the Java plugin.

**Table 45. Scala plugin - additional task dependencies**

task name	Depends on
<code>classes</code>	<code>compileScala</code>
<code>testClasses</code>	<code>compileTestScala</code>
<code>sourceSetClasses</code>	<code>compileSourceSetScala</code>

**Figure 34. Scala plugin - tasks**

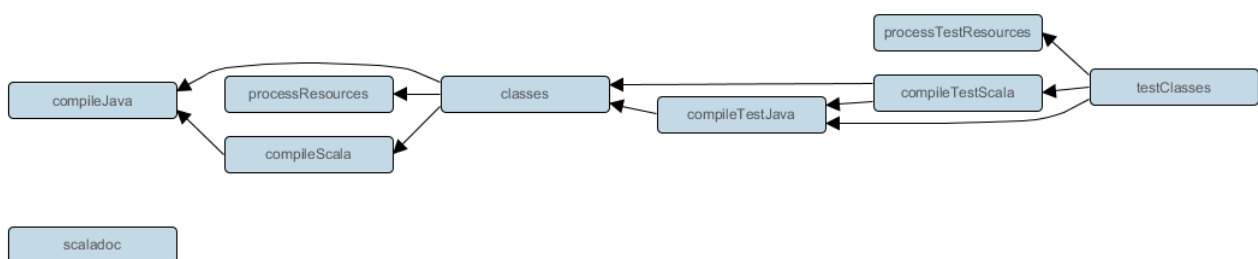

## §

### Project layout

The Scala plugin assumes the project layout shown below. All the Scala source directories can contain Scala *and* Java code. The Java source directories may only contain Java source code. None of these directories need to exist or have anything in them; the Scala plugin will simply compile whatever it finds.

#### **src/main/java**

Production Java source.

#### **src/main/resources**

Production resources, such as XML and properties files.

#### **src/main/scala**

Production Scala source. May also contain Java source files for joint compilation.

#### **src/test/java**

Test Java source.

#### **src/test/resources**

Test resources.

#### **src/test/scala**

Test Scala source. May also contain Java source files for joint compilation.

`src/sourceSet/java`

Java source for the source set named *sourceSet*.

`src/sourceSet/resources`

Resources for the source set named *sourceSet*.

`src/sourceSet/scala`

Scala source files for the given source set. May also contain Java source files for joint compilation.

§

## Changing the project layout

Just like the Java plugin, the Scala plugin allows you to configure custom locations for Scala production and test source files.

### Example 507. Custom Scala source layout

**build.gradle**

```
sourceSets {
    main {
        scala {
            srcDirs = ['src/scala']
        }
    }
    test {
        scala {
            srcDirs = ['test/scala']
        }
    }
}
```

§

## Dependency management

Scala projects need to declare a `scala-library` dependency. This dependency will then be used on compile and runtime class paths. It will also be used to get hold of the Scala compiler and Scaladoc tool, respectively.<sup>[18]</sup>

If Scala is used for production code, the `scala-library` dependency should be added to the `compile` configuration:

#### Example 508. Declaring a Scala dependency for production code

```
build.gradle
repositories {
    mavenCentral()
}

dependencies {
    compile 'org.scala-lang:scala-library:2.11.12'
    testCompile 'org.scalatest:scalatest_2.11:3.0.0'
    testCompile 'junit:junit:4.12'
}
```

If Scala is only used for test code, the `scala-library` dependency should be added to the `testCompile` configuration:

#### Example 509. Declaring a Scala dependency for test code

```
build.gradle
dependencies {
    testCompile "org.scala-lang:scala-library:2.11.1"
}
```

## §

### Automatic configuration of `scalaClasspath`

The `ScalaCompile` and `ScalaDoc` tasks consume Scala code in two ways: on their `classpath`, and on their `scalaClasspath`. The former is used to locate classes referenced by the source code, and will typically contain `scala-library` along with other libraries. The latter is used to load and execute the Scala compiler and Scaladoc tool, respectively, and should only contain the `scala-compiler` library and its dependencies.

Unless a task's `scalaClasspath` is configured explicitly, the Scala (base) plugin will try to infer it from the task's `classpath`. This is done as follows:

If a `scala-library` jar is found on `classpath`, and the project has at least one repository declared, a corresponding `scala-compiler` repository dependency will be added to `scalaClasspath`.

Otherwise, execution of the task will fail with a message saying that `scalaClasspath` could not be inferred.

## Configuring the Zinc compiler

The Scala plugin uses a configuration named `zinc` to resolve the Zinc compiler and its dependencies. Gradle will provide a default version of Zinc, but if you need to use a particular Zinc version, you can add an explicit dependency like `"com.typesafe.zinc:zinc:0.3.6"` to the `zinc` configuration. Gradle supports version 0.3.0 of Zinc and above; however, due to a regression in the Zinc compiler, versions 0.3.2 through 0.3.5.2 cannot be used.

### Example 510. Declaring a version of the Zinc compiler to use

**build.gradle**

```
dependencies {  
    zinc 'com.typesafe.zinc:zinc:0.3.9'  
}
```

**Note:** It is important to take care when declaring your `scala-library` dependency. The Zinc compiler itself needs a compatible version of `scala-library` that may be different from the version required by your application. Gradle takes care of adding a compatible version of `scala-library` for you, but over-broad dependency resolution rules could force an incompatible version to be used instead.

For example, using `configurations.all` to force a particular version of `scala-library` would also override the version used by the Zinc compiler:

### Example 511. Forcing a `scala-library` dependency for all configurations

**Note: build.gradle**

```
configurations.all {  
    resolutionStrategy.force "org.scala-lang:scala-library:2.11.12"  
}
```

The best way to avoid this problem is to be more selective when configuring the `scala-library` dependency (such as not using a `configuration.all` rule or using a conditional to prevent the rule from being applied to the `zinc` configuration). Sometimes this rule may come from a plugin or other code that you do not have control over. In such a case, you can force a correct version of the library on the `zinc` configuration only:

### Example 512. Forcing a `scala-library` dependency for the `zinc` configuration

**Note: build.gradle**

```
configurations.zinc {  
    resolutionStrategy.force "org.scala-lang:scala-library:2.10.5"  
}
```

You can diagnose problems with the version of the Zinc compiler selected by running

dependencyInsight for the `zinc` configuration.

§

## Convention properties

The Scala plugin does not add any convention properties to the project.

§

## Source set properties

The Scala plugin adds the following convention properties to each source set in the project. You can use these properties in your build script as though they were properties of the source set object.

**Table 46. Scala plugin - source set properties**

roperty name	Type	Default value	Description
<code>cala</code>	<code>SourceDirectorySet</code> (read-only)	Not null	The Scala source files of this source set. Contains all <code>.scala</code> and <code>.java</code> files found in the Scala source directories, and excludes all other types of files.
<code>cala.srcDirs</code>	<code>Set&lt;File&gt;</code> . Can set using anything described in the section called "Understanding implicit conversion to file collections".	<code>[projectDir]</code>	The source directories containing the Scala source files of this source set. May also contain Java source files for joint compilation.
<code>llScala</code>	<code>FileTree</code> (read-only)	Not null	All Scala source files of this source set. Contains only the <code>.scala</code> files found in the Scala source directories.

These convention properties are provided by a convention object of type `ScalaSourceSet`.

The Scala plugin also modifies some source set properties:

**Table 47. Scala plugin - source set properties**

roperty name	Change
<code>llJava</code>	Adds all <code>.java</code> files found in the Scala source directories.
<code>llSource</code>	Adds all source files found in the Scala source directories.



§

## Compiling in external process

Scala compilation takes place in an external process.

Memory settings for the external process default to the defaults of the JVM. To adjust memory settings, configure the `scalaCompileOptions.forkOptions` property as needed:

### Example 513. Adjusting memory settings

**build.gradle**

```
tasks.withType(ScalaCompile) {
    configure(scalaCompileOptions.forkOptions) {
        memoryMaximumSize = '1g'
        jvmArgs = ['-XX:MaxPermSize=512m']
    }
}
```

§

## Incremental compilation

By compiling only classes whose source code has changed since the previous compilation, and classes affected by these changes, incremental compilation can significantly reduce Scala compilation time. It is particularly effective when frequently compiling small code increments, as is often done at development time.

The Scala plugin defaults to incremental compilation by integrating with Zinc, a standalone version of sbt's incremental Scala compiler. If you want to disable the incremental compilation, set `force = true` in your build file:

### Example 514. Forcing all code to be compiled

**build.gradle**

```
tasks.withType(ScalaCompile) {
    scalaCompileOptions.with {
        force = true
    }
}
```

*Note:* This will only cause all classes to be recompiled if at least one input source file has changed. If there are no changes to the source files, the `compileScala` task will still be considered UP-TO-DATE as usual.

The Zinc-based Scala Compiler supports joint compilation of Java and Scala code. By default, all Java and Scala code under `src/main/scala` will participate in joint compilation. Even Java code will be compiled incrementally.

Incremental compilation requires dependency analysis of the source code. The results of this analysis are stored in the file designated by `scalaCompileOptions.incrementalOptions.analysisFile` (which

has a sensible default). In a multi-project build, analysis files are passed on to downstream `ScalaCompile` tasks to enable incremental compilation across project boundaries. For `ScalaCompile` tasks added by the Scala plugin, no configuration is necessary to make this work. For other `ScalaCompile` tasks that you might add, the property `scalaCompileOptions.incrementalOptions.publishedCode` needs to be configured to point to the classes folder or Jar archive by which the code is passed on to compile class paths of downstream `ScalaCompile` tasks. Note that if `publishedCode` is not set correctly, downstream tasks may not recompile code affected by upstream changes, leading to incorrect compilation results.

Note that Zinc's Nailgun based daemon mode is not supported. Instead, we plan to enhance Gradle's own compiler daemon to stay alive across Gradle invocations, reusing the same Scala compiler. This is expected to yield another significant speedup for Scala compilation.

§

## Compiling and testing for Java 6 or Java 7

The Scala compiler ignores Gradle's `targetCompatibility` and `sourceCompatibility` settings. In Scala 2.11, the Scala compiler always compiles to Java 6 compatible bytecode. In Scala 2.12, the Scala compiler always compiles to Java 8 compatible bytecode. If you also have Java source, you can follow the same steps as for the Java plugin to ensure the correct Java compiler is used.

### Example 515. Configure Java 6 build for Scala

#### **gradle.properties**

```
# in $HOME/.gradle/gradle.properties
java6Home=/Library/Java/JavaVirtualMachines/1.6.0.jdk/Contents/Home
```

#### **build.gradle**

```
sourceCompatibility = 1.6

assert hasProperty('java6Home') : "Set the property 'java6Home' in your your gradle.properties"
def javaExecutablesPath = new File(java6Home, 'bin')
def javaExecutables = [:].withDefault { execName ->
    def executable = new File(javaExecutablesPath, execName)
    assert executable.exists() : "There is no ${execName} executable in ${java6Home}"
    executable
}

tasks.withType(AbstractCompile) {
    options.with {
        fork = true
        forkOptions.javaHome = file(java6Home)
    }
}

tasks.withType(Test) {
    executable = javaExecutables.java
}

tasks.withType(JavaExec) {
    executable = javaExecutables.java
}

tasks.withType(Javadoc) {
    executable = javaExecutables.javadoc
}
```

## §

### Eclipse Integration

When the Eclipse plugin encounters a Scala project, it adds additional configuration to make the project work with Scala IDE out of the box. Specifically, the plugin adds a Scala nature and dependency container.

§

## IntelliJ IDEA Integration

When the IDEA plugin encounters a Scala project, it adds additional configuration to make the project work with IDEA out of the box. Specifically, the plugin adds a Scala SDK (IntelliJ IDEA 14+) and a Scala compiler library that matches the Scala version on the project's class path. The Scala plugin is backwards compatible with earlier versions of IntelliJ IDEA and it is possible to add a Scala facet instead of the default Scala SDK by configuring `targetVersion` on [IdeaModel](#).

### Example 516. Explicitly specify a target IntelliJ IDEA version

#### **build.gradle**

```
idea {  
    targetVersion = "13"  
}
```

---

[18] See the section called “Automatic configuration of `scalaClasspath`”.

# The ANTLR Plugin

The ANTLR plugin extends the Java plugin to add support for generating parsers using ANTLR.

**Note:** The ANTLR plugin supports ANTLR version 2, 3 and 4.

§

## Usage

To use the ANTLR plugin, include the following in your build script:

**Example 517. Using the ANTLR plugin**

```
build.gradle
apply plugin: 'antlr'
```

§

## Tasks

The ANTLR plugin adds a number of tasks to your project, as shown below.

**Table 48. ANTLR plugin - tasks**

task name	Depends on	Type	Description
<code>generateGrammarSource</code>	-	<a href="#">AntlrTask</a>	Generates the source files for all production ANTLR grammars.
<code>generateTestGrammarSource</code>	-	<a href="#">AntlrTask</a>	Generates the source files for all test ANTLR grammars.
<code>generateSourceSetGrammarSource</code>		<a href="#">AntlrTask</a>	Generates the source files for all ANTLR grammars for the given source set.

The ANTLR plugin adds the following dependencies to tasks added by the Java plugin.

**Table 49. ANTLR plugin - additional task dependencies**

task name	Depends on
<code>compileJava</code>	<code>generateGrammarSource</code>
<code>compileTestJava</code>	<code>generateTestGrammarSource</code>
<code>compileSourceSetJava</code>	<code>generateSourceSetGrammarSource</code>

§

## Project layout

**Table 50. ANTLR plugin - project layout**

Directory	Meaning
<code>src/main/antlr</code>	Production ANTLR grammar files. If the ANTLR grammar is organized in packages, the structure in the <code>antlr</code> folder should reflect the package structure. This ensures that the generated sources end up in the correct target subfolder.
<code>src/test/antlr</code>	Test ANTLR grammar files.
<code>src/sourceSet/antlr</code>	ANTLR grammar files for the given source set.

§

## Dependency management

The ANTLR plugin adds an `antlr` dependency configuration which provides the ANTLR implementation to use. The following example shows how to use ANTLR version 3.

**Example 518. Declare ANTLR version**

```
build.gradle
repositories {
    mavenCentral()
}

dependencies {
    antlr "org.antlr:antlr:3.5.2" // use ANTLR version 3
    // antlr "org.antlr:antlr4:4.5" // use ANTLR version 4
}
```

If no dependency is declared, `antlr:antlr:2.7.7` will be used as the default. To use a different ANTLR version add the appropriate dependency to the `antlr` dependency configuration as above.

§

## Convention properties

The ANTLR plugin does not add any convention properties.

§

## Source set properties

The ANTLR plugin adds the following properties to each source set in the project.

**Table 51. ANTLR plugin - source set properties**

roperty name	Type	Default value	Description
antlr	<code>SourceDirectorySet</code> (read-only)	Not null	The ANTLR grammar files of this source set. Contains all <code>.g</code> or <code>.g4</code> files found in the ANTLR source directories, and excludes all other types of files.
antlr.srcDirs	<code>Set&lt;File&gt;</code> . Can set using anything described in the section called “Understanding implicit conversion to file collections”.	<code>[projectDir/src/name/antlr]</code>	The source directories containing the ANTLR grammar files of this source set.

§

## Controlling the ANTLR generator process

The ANTLR tool is executed in a forked process. This allows fine grained control over memory settings for the ANTLR process. To set the heap size of an ANTLR process, the `maxHeapSize` property of `AntlrTask` can be used. To pass additional command-line arguments, append to the `arguments` property of `AntlrTask`.

**Example 519. setting custom max heap size and extra arguments for ANTLR**

```
build.gradle
generateGrammarSource {
    maxHeapSize = "64m"
    arguments += ["-visitor", "-long-messages"]
}
```

# The Checkstyle Plugin

The Checkstyle plugin performs quality checks on your project's Java source files using Checkstyle and generates reports from these checks.

§

## Usage

To use the Checkstyle plugin, include the following in your build script:

### Example 520. Using the Checkstyle plugin

**build.gradle**

```
apply plugin: 'checkstyle'
```

The plugin adds a number of tasks to the project that perform the quality checks. You can execute the checks by running `gradle check`.

Note that Checkstyle will run with the same Java version used to run Gradle.

§

## Tasks

The Checkstyle plugin adds the following tasks to the project:

**Table 52. Checkstyle plugin - tasks**

task name	Depends on	Type	Description
checkstyleMain	classes	Checkstyle	Runs Checkstyle against the production Java source files.
checkstyleTest	testClasses	Checkstyle	Runs Checkstyle against the test Java source files.
checkstyleSourceSet	sourceSetClasses	Checkstyle	Runs Checkstyle against the given source set's Java source files.

The Checkstyle plugin adds the following dependencies to tasks defined by the Java plugin.



**Table 53. Checkstyle plugin - additional task dependencies**

task name	Depends on
check	All Checkstyle tasks, including <code>checkstyleMain</code> and <code>checkstyleTest</code> .

## §

### Project layout

By default, the Checkstyle plugin expects configuration files to be placed in the root project, but this can be changed.

**Table 54. Checkstyle plugin - root project layout**

file	Meaning
<code>config/checkstyle</code>	Other Checkstyle configuration files (e.g., <code>Suppressions.xml</code> )
<code>config/checkstyle/checkstyle.xml</code>	Checkstyle configuration file

## §

### Dependency management

The Checkstyle plugin adds the following dependency configurations:

**Table 55. Checkstyle plugin - dependency configurations**

name	Meaning
<code>checkstyle</code>	The Checkstyle libraries to use

## §

### Configuration

See the [CheckstyleExtension](#) class in the API documentation.

## §

#### Built-in variables

The Checkstyle plugin defines a `config_loc` property that can be used in Checkstyle configuration files to define paths to other configuration files like `Suppressions.xml`.

### Example 521. Using the config\_loc property

**config/checkstyle/checkstyle.xml**

```
<module name="SuppressionFilter">
  <property name="file" value="{config_loc}/suppressions.xml"/>
</module>
```

§

## Customizing the HTML report

The HTML report generated by the [Checkstyle](#) task can be customized using a XSLT stylesheet, for example to highlight specific errors or change its appearance:

### Example 522. Customizing the HTML report

**build.gradle**

```
tasks.withType(Checkstyle) {
  reports {
    xml.enabled false
    html.enabled true
    html.stylesheet resources.text.fromFile('config/xsl/checkstyle-custom.xsl')
  }
}
```

View a sample Checkstyle stylesheet.

# The CodeNarc Plugin

The CodeNarc plugin performs quality checks on your project's Groovy source files using CodeNarc and generates reports from these checks.

§

## Usage

To use the CodeNarc plugin, include the following in your build script:

### Example 523. Using the CodeNarc plugin

**build.gradle**

```
apply plugin: 'codenarc'
```

The plugin adds a number of tasks to the project that perform the quality checks when used with the Groovy Plugin. You can execute the checks by running `gradle check`.

§

## Tasks

The CodeNarc plugin adds the following tasks to the project:

**Table 56. CodeNarc plugin - tasks**

task name	Depends on	Type	Description
<code>codenarcMain</code>	-	<a href="#">CodeNarc</a>	Runs CodeNarc against the production Groovy source files.
<code>codenarcTest</code>	-	<a href="#">CodeNarc</a>	Runs CodeNarc against the test Groovy source files.
<code>codenarcSourceSet</code>	-	<a href="#">CodeNarc</a>	Runs CodeNarc against the given source set's Groovy source files.

The CodeNarc plugin adds the following dependencies to tasks defined by the Groovy plugin.

Table 57. CodeNarc plugin - additional task dependencies

task name	Depends on
check	All CodeNarc tasks, including <code>codenarcMain</code> and <code>codenarcTest</code> .

§

## Project layout

The CodeNarc plugin expects the following project layout:

Table 58. CodeNarc plugin - project layout

file	Meaning
<code>config/codenarc/codenarc.xml</code>	CodeNarc configuration file

§

## Dependency management

The CodeNarc plugin adds the following dependency configurations:

Table 59. CodeNarc plugin - dependency configurations

name	Meaning
<code>codenarc</code>	The CodeNarc libraries to use

§

## Configuration

See the `CodeNarcExtension` class in the API documentation.

# The FindBugs Plugin

The FindBugs plugin performs quality checks on your project's Java source files using FindBugs and generates reports from these checks.

§

## Usage

To use the FindBugs plugin, include the following in your build script:

### Example 524. Using the FindBugs plugin

**build.gradle**

```
apply plugin: 'findbugs'
```

The plugin adds a number of tasks to the project that perform the quality checks. You can execute the checks by running `gradle check`.

Note that Findbugs will run with the same Java version used to run Gradle.

§

## Tasks

The FindBugs plugin adds the following tasks to the project:

**Table 60. FindBugs plugin - tasks**

ask name	Depends on	Type	Description
<code>indbugsMain</code>	<code>classes</code>	<a href="#">FindBugs</a>	Runs FindBugs against the production Java source files.
<code>indbugsTest</code>	<code>testClasses</code>	<a href="#">FindBugs</a>	Runs FindBugs against the test Java source files.
<code>indbugsSourceSet</code>	<code>sourceSetClasses</code>	<a href="#">FindBugs</a>	Runs FindBugs against the given source set's Java source files.

The FindBugs plugin adds the following dependencies to tasks defined by the Java plugin.

Table 61. FindBugs plugin - additional task dependencies

ask name	Depends on
heck	All FindBugs tasks, including <code>findbugsMain</code> and <code>findbugsTest</code> .

§

Dependency management

The FindBugs plugin adds the following dependency configurations:

Table 62. FindBugs plugin - dependency configurations

ame	Meaning
indbugs	The FindBugs libraries to use

§

Configuration

See the `FindBugsExtension` class in the API documentation.

§

Customizing the HTML report

The HTML report generated by the `FindBugs` task can be customized using a XSLT stylesheet, for example to highlight specific errors or change its appearance:

Example 525. Customizing the HTML report

```
build.gradle
tasks.withType(FindBugs) {
    reports {
        xml.enabled false
        html.enabled true
        html.stylesheet resources.text.fromFile('config/xsl/findbugs-custom.xml')
    }
}
```

View a sample FindBugs stylesheet.

# The JDepend Plugin

The JDepend plugin performs quality checks on your project's source files using JDepend and generates reports from these checks.

§

## Usage

To use the JDepend plugin, include the following in your build script:

### Example 526. Using the JDepend plugin

**build.gradle**

```
apply plugin: 'jdepend'
```

The plugin adds a number of tasks to the project that perform the quality checks. You can execute the checks by running `gradle check`.

Note that JDepend will run with the same Java version used to run Gradle.

§

## Tasks

The JDepend plugin adds the following tasks to the project:

**Table 63. JDepend plugin - tasks**

ask name	Depends on	Type	Description
<code>dependMain</code>	<code>classes</code>	<a href="#">JDepend</a>	Runs JDepend against the production Java source files.
<code>dependTest</code>	<code>testClasses</code>	<a href="#">JDepend</a>	Runs JDepend against the test Java source files.
<code>dependSourceSet</code>	<code>sourceSetClasses</code>	<a href="#">JDepend</a>	Runs JDepend against the given source set's Java source files.

The JDepend plugin adds the following dependencies to tasks defined by the Java plugin.

Table 64. JDepend plugin - additional task dependencies

task name	Depends on
check	All JDepend tasks, including <code>jdependMain</code> and <code>jdependTest</code> .

§

## Dependency management

The JDepend plugin adds the following dependency configurations:

Table 65. JDepend plugin - dependency configurations

name	Meaning
depend	The JDepend libraries to use

§

## Configuration

See the [JDependExtension](#) class in the API documentation.



# The PMD Plugin

The PMD plugin performs quality checks on your project's Java source files using PMD and generates reports from these checks.

§

## Usage

To use the PMD plugin, include the following in your build script:

### Example 527. Using the PMD plugin

```
build.gradle  
apply plugin: 'pmd'
```

The plugin adds a number of tasks to the project that perform the quality checks. You can execute the checks by running `gradle check`.

Note that PMD will run with the same Java version used to run Gradle.

§

## Tasks

The PMD plugin adds the following tasks to the project:

**Table 66. PMD plugin - tasks**

ask name	Depends on	Type	Description
<code>pmdMain</code>	-	<a href="#">Pmd</a>	Runs PMD against the production Java source files.
<code>pmdTest</code>	-	<a href="#">Pmd</a>	Runs PMD against the test Java source files.
<code>pmdSourceSet</code>	-	<a href="#">Pmd</a>	Runs PMD against the given source set's Java source files.

The PMD plugin adds the following dependencies to tasks defined by the Java plugin.

**Table 67. PMD plugin - additional task dependencies**

task name	Depends on
check	All PMD tasks, including <code>pmdMain</code> and <code>pmdTest</code> .

§

## Dependency management

The PMD plugin adds the following dependency configurations:

**Table 68. PMD plugin - dependency configurations**

name	Meaning
libs	The PMD libraries to use

§

## Configuration

See the `PmdExtension` class in the API documentation.

# The JaCoCo Plugin

**Note:** The JaCoCo plugin is currently incubating. Please be aware that the DSL and other configuration may change in later Gradle versions.

The JaCoCo plugin provides code coverage metrics for Java code via integration with JaCoCo.

§

## Getting Started

To get started, apply the JaCoCo plugin to the project you want to calculate code coverage for.

### Example 528. Applying the JaCoCo plugin

```
build.gradle
apply plugin: "jacoco"
```

If the Java plugin is also applied to your project, a new task named `jacocoTestReport` is created that depends on the `test` task. The report is available at `$buildDir/reports/jacoco/test`. By default, a HTML report is generated.

§

## Configuring the JaCoCo Plugin

The JaCoCo plugin adds a project extension named `jacoco` of type `JacocoPluginExtension`, which allows configuring defaults for JaCoCo usage in your build.

### Example 529. Configuring JaCoCo plugin settings

```
build.gradle
jacoco {
    toolVersion = "0.8.1"
    reportsDir = file("$buildDir/customJacocoReportDir")
}
```

**Table 69. Gradle defaults for JaCoCo properties**

property	Gradle default
reportsDir	<code>\$buildDir/reports/jacoco</code>

§


## JaCoCo Report configuration

The [JacocoReport](#) task can be used to generate code coverage reports in different formats. It implements the standard Gradle type [Reporting](#) and exposes a report container of type [JacocoReportsContainer](#).

### Example 530. Configuring test task

#### build.gradle

```
jacocoTestReport {
    reports {
        xml.enabled false
        csv.enabled false
        html.destination file("${buildDir}/jacocoHtml")
    }
}
```

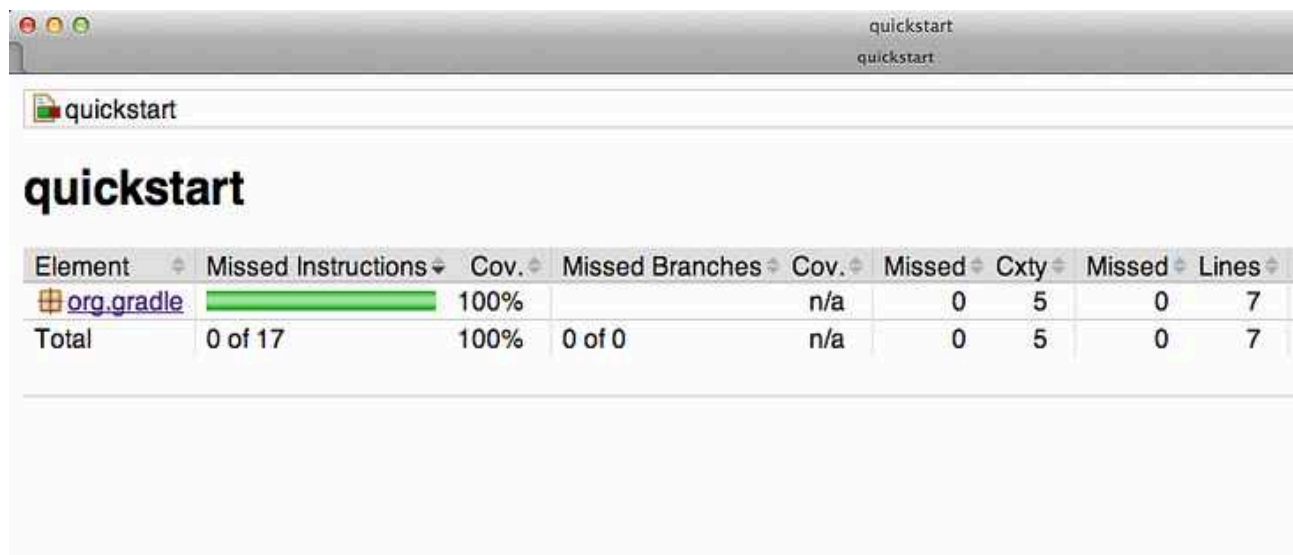

§

## Enforcing code coverage metrics

**Note:** This feature requires the use of JaCoCo version 0.6.3 or higher.

The [JacocoCoverageVerification](#) task can be used to verify if code coverage metrics are met based on configured rules. Its API exposes the method [JacocoCoverageVerification.violationRules\(org.gradle.api.Action\)](#) which is used as

main entry point for configuring rules. Invoking any of those methods returns an instance of [JacocoViolationRulesContainer](#) providing extensive configuration options. The build fails if any of the configured rules are not met. JaCoCo only reports the first violated rule.

Code coverage requirements can be specified for a project as a whole, for individual files, and for particular JaCoCo-specific types of coverage, e.g., lines covered or branches covered. The following example describes the syntax.

#### Example 531. Configuring violation rules

##### build.gradle

```
jacocoTestCoverageVerification {
    violationRules {
        rule {
            limit {
                minimum = 0.5
            }
        }

        rule {
            enabled = false
            element = 'CLASS'
            includes = ['org.gradle.*']

            limit {
                counter = 'LINE'
                value = 'TOTALCOUNT'
                maximum = 0.3
            }
        }
    }
}
```

**Note:** The code for this example can be found at `samples/testing/jacoco/quickstart` in the ‘-all’ distribution of Gradle.

The [JacocoCoverageVerification](#) task is not a task dependency of the `check` task provided by the Java plugin. There is a good reason for it. The task is currently not incremental as it doesn’t declare any outputs. Any violation of the declared rules would automatically result in a failed build when executing the `check` task. This behavior might not be desirable for all users. Future versions of Gradle might change the behavior.

## §

### JaCoCo specific task configuration

The JaCoCo plugin adds a [JacocoTaskExtension](#) extension to all tasks of type `Test`. This extension allows the configuration of the JaCoCo specific properties of the test task.

### Example 532. Configuring test task

#### build.gradle

```
test {
    jacoco {
        append = false
        destinationFile = file("$buildDir/jacoco/jacocoTest.exec")
        classDumpDir = file("$buildDir/jacoco/classpathdumps")
    }
}
```

**Note:** Using the configuration `append = true` (the default) causes the JaCoCo agent to append to a shared output file that may be left over from a different test execution. If `append = true`, Gradle disables caching for the Test task since it cannot guarantee the same results each time.

**Table 70. Default values of the JaCoCo Task extension**

Property	Gradle default
enabled	true
destPath	<code>\$buildDir/jacoco</code>
doAppend	true
includes	[]
excludes	[]
excludeClassLoaders	[]
excludeNoLocationClasses	false
sessionId	auto-generated
dumpOnExit	true
output	<code>Output.FILE</code>
address	-
port	-
classDumpPath	-
isX	false

While all tasks of type `Test` are automatically enhanced to provide coverage information when the `java` plugin has been applied, any task that implements `JavaForkOptions` can be enhanced by the JaCoCo plugin. That is, any task that forks Java processes can be used to generate coverage information.

For example you can configure your build to generate code coverage using the `application` plugin.

**Example 533. Using application plugin to generate code coverage data**

```
build.gradle
apply plugin: "application"
apply plugin: "jacoco"

mainClassName = "org.gradle.MyMain"

jacoco {
    applyTo run
}

task applicationCodeCoverageReport(type:JacocoReport){
    executionData run
    sourceSets sourceSets.main
}
```

**Note:** The code for this example can be found at `samples/testing/jacoco/application` in the ‘-all’ distribution of Gradle.

**Example 534. Coverage reports generated by applicationCodeCoverageReport**

```
Build layout
application/
  build/
    jacoco/
      run.exec
      reports/jacoco/applicationCodeCoverageReport/html/
        index.html
```

§  
**Tasks**

For projects that also apply the Java Plugin, The JaCoCo plugin automatically adds the following tasks:

**Table 71. JaCoCo plugin - tasks**

ask name	Depends on	Type	Description
<code>jacocoTestReport</code>	-	<a href="#">JacocoReport</a>	Generates code coverage report for the test task.
<code>jacocoTestCoverageVerification</code>	-	<a href="#">JacocoCoverageVerification</a>	Verifies code coverage metrics based on specified rules for the test task.



## §

### Dependency management

The JaCoCo plugin adds the following dependency configurations:

**Table 72. JaCoCo plugin - dependency configurations**

ame	Meaning
acocoAnt	The JaCoCo Ant library used for running the <code>JacocoReport</code> , <code>JacocoMerge</code> and <code>JacocoCoverageVerification</code> tasks.
acocoAgent	The JaCoCo agent library used for instrumenting the code under test.

# The OSGi Plugin

The OSGi plugin provides a factory method to create an `OsgiManifest` object. `OsgiManifest` extends `Manifest`. To learn more about generic manifest handling, see the section called “Manifest”. If the Java plugins is applied, the OSGi plugin replaces the manifest object of the default jar with an `OsgiManifest` object. The replaced manifest is merged into the new one.

**Note:** The OSGi plugin makes heavy use of the BND tool. A separate plugin implementation is maintained by the BND authors that has more advanced features.

§

## Usage

To use the OSGi plugin, include the following in your build script:

### Example 535. Using the OSGi plugin

```
build.gradle
apply plugin: 'osgi'
```

§

## Implicitly applied plugins

Applies the Java base plugin.

§

## Tasks

The OSGi plugin adds the following tasks to the project:

**Table 73. OSGi plugin - tasks**

ask name	Depends on	Type	Description
<code>sgClasses</code>	<code>classes</code>	<code>Sync</code>	Copies all classes from the main source set to a single directory that is processed by BND.

§

## Convention object

The OSGi plugin adds the following convention object: `OsgiPluginConvention`

§

## Convention properties

The OSGi plugin does not add any convention properties to the project.

§

## Convention methods

The OSGi plugin adds the following methods. For more details, see the API documentation of the convention object.

**Table 74. OSGi methods**

Method	Return Type	Description
<code>getManifest()</code>	<code>OsgiManifest</code>	Returns an <code>OsgiManifest</code> object.
<code>getManifest(Closure cl)</code>	<code>OsgiManifest</code>	Returns an <code>OsgiManifest</code> object configured by the closure.

The classes in the `classes` dir are analyzed regarding their package dependencies and the packages they expose. Based on this the *Import-Package* and the *Export-Package* values of the OSGi Manifest are calculated. If the classpath contains jars with an OSGi bundle, the bundle information is used to specify version information for the *Import-Package* value. Beside the explicit properties of the `OsgiManifest` object you can add instructions.

### Example 536. Configuration of OSGi MANIFEST.MF file

#### build.gradle

```
jar {  
    manifest { // the manifest of the default jar is of type OsgiManifest  
        name = 'overwrittenSpecialOsgiName'  
        instruction 'Private-Package',  
                    'org.mycomp.packagel1',  
                    'org.mycomp.package2'  
        instruction 'Bundle-Vendor', 'MyCompany'  
        instruction 'Bundle-Description', 'Platform2: Metrics 2 Measures Framework'  
        instruction 'Bundle-DocURL', 'http://www.mycompany.com'  
    }  
}  
  
task fooJar(type: Jar) {  
    manifest = osgiManifest {  
        instruction 'Bundle-Vendor', 'MyCompany'  
    }  
}
```

The first argument of the instruction call is the key of the property. The other arguments form the value. To learn more about the available instructions have a look at the BND tool.

# The Eclipse Plugins

The Eclipse plugins generate files that are used by the Eclipse IDE, thus making it possible to import the project into Eclipse (File - Import... - Existing Projects into Workspace).

The `eclipse-wtp` is automatically applied whenever the `eclipse` plugin is applied to a War or Ear project. For utility projects (i.e. Java projects used by other web projects), you need to apply the `eclipse-wtp` plugin explicitly.

What exactly the `eclipse` plugin generates depends on which other plugins are used:

**Table 75. Eclipse plugin behavior**

Plugin	Description
<code>one</code>	Generates minimal <code>.project</code> file.
<code>java</code>	Adds Java configuration to <code>.project</code> . Generates <code>.classpath</code> and JDT settings file.
<code>roovy</code>	Adds Groovy configuration to <code>.project</code> file.
<code>scala</code>	Adds Scala support to <code>.project</code> and <code>.classpath</code> files.
<code>/ar</code>	Adds web application support to <code>.project</code> file.
<code>ear</code>	Adds ear application support to <code>.project</code> file.

The `eclipse-wtp` plugin generates all WTP settings files and enhances the `.project` file. If a Java or War is applied, `.classpath` will be extended to get a proper packaging structure for this utility library or web application project.

Both Eclipse plugins are open to customization and provide a standardized set of hooks for adding and removing content from the generated files.

§

## Usage

To use either the Eclipse or the Eclipse WTP plugin, include one of the lines in your build script:

### Example 537. Using the Eclipse plugin

```
build.gradle  
apply plugin: 'eclipse'
```

### Example 538. Using the Eclipse WTP plugin

```
build.gradle  
apply plugin: 'eclipse-wtp'
```

*Note:* Internally, the `eclipse-wtp` plugin also applies the `eclipse` plugin so you don't need to apply both.

Both Eclipse plugins add a number of tasks to your projects. The main tasks that you will use are the `eclipse` and `cleanEclipse` tasks.

§

## Tasks

The Eclipse plugins add the tasks shown below to a project.

**Table 76. Eclipse plugin - tasks**

task name	Depends on	Type	Description
<code>eclipse</code>	all Eclipse configuration file generation tasks	<a href="#">Task</a>	Generates all Eclipse configuration files
<code>cleanEclipse</code>	all Eclipse configuration file clean tasks	<a href="#">Delete</a>	Removes all Eclipse configuration files
<code>cleanEclipseProject</code>	-	<a href="#">Delete</a>	Removes the <code>.project</code> file.
<code>cleanEclipseClasspath</code>	-	<a href="#">Delete</a>	Removes the <code>.classpath</code> file.
<code>cleanEclipseJdt</code>	-	<a href="#">Delete</a>	Removes the <code>.settings/org.eclipse.jdt.core</code> file.
<code>eclipseProject</code>	-	<a href="#">GenerateEclipseProject</a>	Generates the <code>.project</code> file.
<code>eclipseClasspath</code>	-	<a href="#">GenerateEclipseClasspath</a>	Generates the <code>.classpath</code> file.
<code>eclipseJdt</code>	-	<a href="#">GenerateEclipseJdt</a>	Generates the <code>.settings/org.eclipse.jdt.core</code> file.

**Table 77. Eclipse WTP plugin - additional tasks**

task name	Depends on	Type	Description
<code>cleanEclipseWtpComponent</code>	-	<a href="#">Delete</a>	Removes the <code>.settings/org.eclipse.wst.common.component</code> file.
<code>cleanEclipseWtpFacet</code>	-	<a href="#">Delete</a>	Removes the <code>.settings/org.eclipse.wst.common.facet</code> file.
<code>eclipseWtpComponent</code>	-	<a href="#">GenerateEclipseWtpComponent</a>	Generates the <code>.settings/org.eclipse.wst.common.component</code> file.
<code>eclipseWtpFacet</code>	-	<a href="#">GenerateEclipseWtpFacet</a>	Generates the <code>.settings/org.eclipse.wst.common.facet</code> file.

§

## Configuration

**Table 78. Configuration of the Eclipse plugins**

Model	Reference name	Description
<code>EclipseModel</code>	<code>eclipse</code>	Top level element that enables configuration of the Eclipse plugin in a DSL-friendly fashion.
<code>EclipseProject</code>	<code>eclipse.project</code>	Allows configuring project information
<code>EclipseClasspath</code>	<code>eclipse.classpath</code>	Allows configuring classpath information.
<code>EclipseJdt</code>	<code>eclipse.jdt</code>	Allows configuring jdt information (source/target Java compatibility).
<code>EclipseWtpComponent</code>	<code>eclipse.wtp.component</code>	Allows configuring wtp component information only if <code>eclipse-wtp</code> plugin was applied.
<code>EclipseWtpFacet</code>	<code>eclipse.wtp.facet</code>	Allows configuring wtp facet information only if <code>eclipse-wtp</code> plugin was applied.

§

## Customizing the generated files

The Eclipse plugins allow you to customize the generated metadata files. The plugins provide a DSL for configuring model objects that model the Eclipse view of the project. These model objects are then merged with the existing Eclipse XML metadata to ultimately generate new metadata. The model objects provide lower level hooks for working with domain objects representing the file content before and after merging with the model configuration. They also provide a very low level hook for working directly with the raw XML for adjustment before it is persisted, for fine tuning and configuration that the Eclipse and Eclipse WTP plugins do not model.

§

## Merging

Sections of existing Eclipse files that are also the target of generated content will be amended or overwritten, depending on the particular section. The remaining sections will be left as-is.



§

## Disabling merging with a complete rewrite

To completely rewrite existing Eclipse files, execute a clean task together with its corresponding generation task, like `gradle cleanEclipse eclipse` (in that order). If you want to make this the default behavior, add `tasks.eclipse.dependsOn(cleanEclipse)` to your build script. This makes it unnecessary to execute the clean task explicitly.

This strategy can also be used for individual files that the plugins would generate. For instance, this can be done for the `.classpath` file with `gradle cleanEclipseClasspath eclipseClasspath`.

§

## Hooking into the generation lifecycle

The Eclipse plugins provide objects modeling the sections of the Eclipse files that are generated by Gradle. The generation lifecycle is as follows:

The file is read; or a default version provided by Gradle is used if it does not exist

The `beforeMerged` hook is executed with a domain object representing the existing file

The existing content is merged with the configuration inferred from the Gradle build or defined explicitly in the eclipse DSL

The `whenMerged` hook is executed with a domain object representing contents of the file to be persisted

The `withXml` hook is executed with a raw representation of the XML that will be persisted

The final XML is persisted

The following table lists the domain object used for each of the Eclipse model types:

**Table 79. Advanced configuration hooks**

Model	<code>beforeMerged { arg -&gt; }</code> argument type	<code>whenMerged { arg -&gt; }</code> argument type	<code>withXml { arg -&gt; }</code> argument type	<code>withProperties { arg -&gt; }</code> argument type
<code>eclipseProject</code>	<code>Project</code>	<code>Project</code>	<code>XmlProvider</code>	-
<code>eclipseClasspath</code>	<code>Classpath</code>	<code>Classpath</code>	<code>XmlProvider</code>	-
<code>eclipseJdt</code>	<code>Jdt</code>	<code>Jdt</code>	-	<code>java.util.Properties</code>
<code>eclipseWtpComponent</code>	<code>WtpComponent</code>	<code>WtpComponent</code>	<code>XmlProvider</code>	-
<code>eclipseWtpFacet</code>	<code>WtpFacet</code>	<code>WtpFacet</code>	<code>XmlProvider</code>	-

§

### Partial overwrite of existing content

A complete overwrite causes all existing content to be discarded, thereby losing any changes made directly in the IDE. Alternatively, the `beforeMerged` hook makes it possible to overwrite just certain parts of the existing content. The following example removes all existing dependencies from the `Classpath` domain object:

#### Example 539. Partial Overwrite for Classpath

##### **build.gradle**

```
eclipse.classpath.file {
    beforeMerged { classpath ->
        classpath.entries.removeAll { entry -> entry.kind == 'lib' || entry.kind
        }
    }
}
```

The resulting `.classpath` file will only contain Gradle-generated dependency entries, but not any other dependency entries that may have been present in the original file. (In the case of dependency entries, this is also the default behavior.) Other sections of the `.classpath` file will be either left as-is or merged. The same could be done for the natures in the `.project` file:

#### Example 540. Partial Overwrite for Project

##### **build.gradle**

```
eclipse.project.file.beforeMerged { project ->
    project.natures.clear()
}
```

§

### Modifying the fully populated domain objects

The `whenMerged` hook allows to manipulate the fully populated domain objects. Often this is the preferred way to customize Eclipse files. Here is how you would export all the dependencies of an Eclipse project:

#### Example 541. Export Classpath Entries

##### **build.gradle**

```
eclipse.classpath.file {
    whenMerged { classpath ->
        classpath.entries.findAll { entry -> entry.kind == 'lib' }*.exported = false
    }
}
```

§

## Modifying the XML representation

The `withXml` hook allows to manipulate the in-memory XML representation just before the file gets written to disk. Although Groovy's XML support makes up for a lot, this approach is less convenient than manipulating the domain objects. In return, you get total control over the generated file, including sections not modeled by the domain objects.

### Example 542. Customizing the XML

#### **build.gradle**

```
apply plugin: 'eclipse-wtp'

eclipse.wtp.facet.file.withXml { provider ->
    provider.asNode().fixed.find { it.@facet == 'jst.java' }.@facet = 'jst2.java'
}
```

# The IDEA Plugin

The IDEA plugin generates files that are used by IntelliJ IDEA, thus making it possible to open the project from IDEA (`File - Open Project`). Both external dependencies (including associated source and Javadoc files) and project dependencies are considered.

**Note:** If you simply want to load a Gradle project into IntelliJ IDEA, then use the IDE's import facility. You do not need to apply this plugin to import your project into IDEA, although if you do, the import will take account of any extra IDEA configuration you have that doesn't directly modify the generated files — see the Configuration section for more details.

What exactly the IDEA plugin generates depends on which other plugins are used:

## Always

Generates an IDEA module file. Also generates an IDEA project and workspace file if the project is the root project.

## Java Plugin

Additionally adds Java configuration to the IDEA module and project files.

One focus of the IDEA plugin is to be open to customization. The plugin provides a standardized set of hooks for adding and removing content from the generated files.

## §

## Usage

To use the IDEA plugin, include this in your build script:

### Example 543. Using the IDEA plugin

```
build.gradle
apply plugin: 'idea'
```

The IDEA plugin adds a number of tasks to your project. The `idea` task generates an IDEA module file for the project. When the project is the root project, the `idea` task also generates an IDEA project and workspace. The IDEA project includes modules for each of the projects in the Gradle build.

The IDEA plugin also adds an `openIdea` task when the project is the root project. This task generates the IDEA configuration files and opens the result in IDEA. This means you can simply run `./gradlew openIdea`

from the root project to generate and open the IDEA project in one convenient step.

The IDEA plugin also adds a `cleanIdea` task to the project. This task deletes the generated files, if present.

§

## Tasks

The IDEA plugin adds the tasks shown below to a project. Notice that the `clean` task does not depend on the `cleanIdeaWorkspace` task. This is because the workspace typically contains a lot of user specific temporary data and it is not desirable to manipulate it outside IDEA.

### `idea`

*Depends on:* `ideaProject`, `ideaModule`, `ideaWorkspace`

Generates all IDEA configuration files

### `openIdea`

*Depends on:* `idea`

Generates all IDEA configuration files and opens the project in IDEA

### `cleanIdea` — type: `Delete`

*Depends on:* `cleanIdeaProject`, `cleanIdeaModule`

Removes all IDEA configuration files

### `cleanIdeaProject` — type: `Delete`

Removes the IDEA project file

### `cleanIdeaModule` — type: `Delete`

Removes the IDEA module file

### `cleanIdeaWorkspace` — type: `Delete`

Removes the IDEA workspace file

### `ideaProject` — type: `GenerateIdeaProject`

Generates the `.ipr` file. This task is only added to the root project.

### `ideaModule` — type: `GenerateIdeaModule`

Generates the `.iml` file

### `ideaWorkspace` — type: `GenerateIdeaWorkspace`

Generates the `.iws` file. This task is only added to the root project.

§

## Configuration

The plugin adds some configuration options that allow to customize the IDEA project and module files that it generates. These take the form of both model properties and lower-level mechanisms that modify the generated files directly. For example, you can add source and resource directories, as well as inject your own fragments of XML. The former type of configuration is honored by IDEA's import facility, whereas the latter is not.

Here are the configuration properties you can use:

**idea** — **type:** [IdeaModel](#)

Top level element that enables configuration of the idea plugin in a DSL-friendly fashion

**idea.project** — **type:** [IdeaProject](#)

Allows configuring project information

**idea.module** — **type:** [IdeaModule](#)

Allows configuring module information

**idea.workspace** — **type:** [IdeaWorkspace](#)

Allows configuring the workspace XML

Follow the links to the types for examples of using these configuration properties.

§

## Customizing the generated files

The IDEA plugin provides hooks and behavior for customizing the generated content in a more controlled and detailed way. In addition, the `withXml` hook is the only practical way to modify the workspace file because its corresponding domain object is essentially empty.

**Note:** The techniques we discuss in this section don't work with IDEA's import facility

The tasks recognize existing IDEA files and merge them with the generated content.

§

### Merging

Sections of existing IDEA files that are also the target of generated content will be amended or overwritten, depending on the particular section. The remaining sections will be left as-is.

§

Disabling merging with a complete overwrite

To completely rewrite existing IDEA files, execute a clean task together with its corresponding generation task, like `“gradle cleanIdea idea”` (in that order). If you want to make this the default behavior, add `“tasks.cleanIdea.enabled = true”` to your build script. This makes it unnecessary to execute the clean task explicitly.

This strategy can also be used for individual files that the plugin would generate. For instance, this can be done for the `“.iml”` file with `“gradle cleanIdeaModule ideaModule”`.

§

Hooking into the generation lifecycle

The plugin provides objects modeling the sections of the metadata files that are generated by Gradle. The generation lifecycle is as follows:

The file is read; or a default version provided by Gradle is used if it does not exist

The `beforeMerged` hook is executed with a domain object representing the existing file

The existing content is merged with the configuration inferred from the Gradle build or defined explicitly in the eclipse DSL

The `whenMerged` hook is executed with a domain object representing contents of the file to be persisted

The `withXml` hook is executed with a raw representation of the XML that will be persisted

The final XML is persisted

The following are the domain objects used for each of the model types:

#### IdeaProject

- `beforeMerged { Project arg -> ... }`
- `whenMerged { Project arg -> ... }`
- `withXml { XmlProvider arg -> ... }`

#### IdeaModule

- `beforeMerged { Module arg -> ... }`
- `whenMerged { Module arg -> ... }`
- `withXml { XmlProvider arg -> ... }`

#### IdeaWorkspace

- `beforeMerged { Workspace arg -> ... }`
- `whenMerged { Workspace arg -> ... }`
- `withXml { XmlProvider arg -> ... }`

§

#### Partial rewrite of existing content

A complete rewrite causes all existing content to be discarded, thereby losing any changes made directly in the IDE. The `beforeMerged` hook makes it possible to overwrite just certain parts of the existing content. The following example removes all existing dependencies from the `Module` domain object:

#### Example 544. Partial Rewrite for Module

##### **build.gradle**

```
idea.module.iml {
    beforeMerged { module ->
        module.dependencies.clear()
    }
}
```

The resulting module file will only contain Gradle-generated dependency entries, but not any other dependency entries that may have been present in the original file. (In the case of dependency entries, this is also the default behavior.) Other sections of the module file will be either left as-is or merged. The same could be done for the module paths in the project file:

#### Example 545. Partial Rewrite for Project

##### **build.gradle**

```
idea.project.ipr {
    beforeMerged { project ->
        project.modulePaths.clear()
    }
}
```

§

#### Modifying the fully populated domain objects

The `whenMerged` hook allows you to manipulate the fully populated domain objects. Often this is the preferred way to customize IDEA files. Here is how you would export all the dependencies of an IDEA module:



### Example 546. Export Dependencies

#### build.gradle

```
idea.module.iml {  
    whenMerged { module ->  
        module.dependencies*.exported = true  
    }  
}
```

§

#### Modifying the XML representation

The `withXml` hook allows you to manipulate the in-memory XML representation just before the file gets written to disk. Although Groovy's XML support makes up for a lot, this approach is less convenient than manipulating the domain objects. In return, you get total control over the generated file, including sections not modeled by the domain objects.

### Example 547. Customizing the XML

#### build.gradle

```
idea.project.ipr {  
    withXml { provider ->  
        provider.node.component  
            .find { it.@name == 'VcsDirectoryMappings' }  
            .mapping.@vcs = 'Git'  
    }  
}
```

§

## Further things to consider

The paths of dependencies in the generated IDEA files are absolute. If you manually define a path variable pointing to the Gradle dependency cache, IDEA will automatically replace the absolute dependency paths with this path variable. you can configure this path variable via the `idea.pathVariables` property, so that it can do a proper merge without creating duplicates.

# Best practices

# Authoring Maintainable Build Scripts

Gradle build scripts combine the qualities of declarative build logic, expressiveness as well as flexibility and rigidity as needed. As a build script author it is easy to fall into the trap of striking the wrong balance or applying poor coding habits. This chapter describes best practices for writing your build script in a meaningful, yet flexible and efficient way.

**Note:** The third-party Gradle lint plugin helps with enforcing a desired code style in a build script if you are looking for appropriate linting automation.

## §

### Avoiding imperative logic in scripts

The Gradle runtime does not enforce a specific style for build logic. For that very reason, it's easy to end up with a build script that mixes declarative DSL elements with imperative, procedural code. Let's talk about some concrete examples.

*Declarative code:* Built-in, language-agnostic DSL elements (e.g. `Project.dependencies{}` or `Project.repositories{}`) or DSLs exposed by plugins

*Imperative code:* Conditional logic or very complex task action implementations

The end goal of every build script should be to only contain declarative language elements which makes the code easier to understand and maintain. Imperative logic should live in binary plugins and which in turn is applied to the build script. As a side product, you automatically enable your team to reuse the plugin logic in other projects if you publish the artifact to a binary repository.

The following sample build shows a negative example of using conditional logic directly in the build script. While this code snippet is small, it is easy to imagine a full-blown build script using numerous procedural statements and the impact it would have on readability and maintainability. By moving the code into a class testability also becomes a valid option.

### Example 548. A build script using conditional logic to create a task

#### build.gradle

```
if (project.findProperty('releaseEngineer')) {
    task release {
        doLast {
            logger.quiet 'Releasing to production...'

            // release the artifact to production
        }
    }
}
```

Let's compare the build script with the same logic implemented as a binary plugin. The code might look more involved at first but clearly looks more like typical application code. This particular plugin class lives in the [bu:](#) directory which makes it available to the build script automatically.

### Example 549. A binary plugin implementing imperative logic

#### ReleasePlugin.java

```
package com.enterprise;

import org.gradle.api.Action;
import org.gradle.api.Plugin;
import org.gradle.api.Project;
import org.gradle.api.Task;

public class ReleasePlugin implements Plugin<Project> {
    private static final String RELEASE_ENG_ROLE_PROP = "releaseEngineer";
    private static final String RELEASE_TASK_NAME = "release";

    @Override
    public void apply(Project project) {
        if (project.findProperty(RELEASE_ENG_ROLE_PROP) != null) {
            Task task = project.getTasks().create(RELEASE_TASK_NAME);

            task.doLast(new Action<Task>() {
                @Override
                public void execute(Task task) {
                    task.getLogger().quiet("Releasing to production...");

                    // release the artifact to production
                }
            });
        }
    }
}
```

Now that the build logic has been translated into a plugin, you can apply it in the build script. The build script

has been shrunk from 8 lines of code to a one liner.

#### Example 550. A build script applying a plugin that encapsulates imperative logic

**build.gradle**

```
apply plugin: 'com.enterprise.release'
```

§

## Avoiding Gradle internal APIs

Use of Gradle internal APIs in plugins and build scripts has the potential to break builds when either Gradle or plugins change.

The following packages are listed in the Gradle public API definition, with the exception of any subpackage with `internal` in the name:

```
org/gradle/*
org/gradle/api/**
org/gradle/authentication/**
org/gradle/buildinit/**
org/gradle/caching/**
org/gradle/concurrent/**
org/gradle/deployment/**
org/gradle/external/javadoc/**
org/gradle/ide/**
org/gradle/includedbuild/**
org/gradle/ivy/**
org/gradle/jvm/**
org/gradle/language/**
org/gradle/maven/**
org/gradle/nativeplatform/**
org/gradle/normalization/**
org/gradle/platform/**
org/gradle/play/**
org/gradle/plugin/devel/**
org/gradle/plugin/repository/*
org/gradle/plugin/use/*
org/gradle/plugin/management/*
org/gradle/plugins/**
org/gradle/process/**
org/gradle/testfixtures/**
org/gradle/testing/jacoco/**
org/gradle/tooling/**
org/gradle/swiftpm/**
org/gradle/model/**
org/gradle/testkit/**
org/gradle/testing/**
org/gradle/vcs/**
org/gradle/workers/**
```

§

## Alternatives for oft-used internal APIs

To provide a nested DSL for your custom task, don't use `org.gradle.internal.reflect.Instantiator`; use `ObjectFactory` instead. It may also be helpful to read *Lazy Configuration*.

Don't use `org.gradle.api.internal.ConventionMapping`. Use `Provider` and/or `Property`. You can find an example for capturing user input to configure runtime behavior in the implementing plugins guide.

Instead of `org.gradle.internal.os.OperatingSystem`, use another method to detect operating system, such as Apache commons-lang `SystemUtils` or `System.getProperty("os.name")`.

Use other collections or I/O frameworks instead of `org.gradle.util.CollectionUtils`, `org.gradle`, and other classes under `org.gradle.util.*`.

Gradle plugin authors may find the Designing Gradle Plugins subsection on restricting the plugin implementation to Gradle's public API helpful.

§

## Declaring tasks in a build script

The task API gives a build author a lot of flexibility to declare tasks in a build script. For optimal readability and maintainability follow these rules:

The task type should be the only key-value pair that belongs within the parentheses after the task name.

Any other configuration logic for a task should be defined as part of `Project.task(java.lang.String, groovy.lang.Closure)` if possible.

Task actions should only be declared with the methods `Task.doFirst(org.gradle.api.Action)` or `Task.doLast(org.gradle.api.Action)`.

`Task.doLast(org.gradle.api.Action)` should be used if the task only defines a single action.

A task should define a group and description.

### Example 551. Definition of tasks following best practices

#### **build.gradle**

```
import com.enterprise.DocsGenerate

task generateHtmlDocs(type: DocsGenerate) {
    group = JavaBasePlugin.DOCUMENTATION_GROUP
    description = 'Generates the HTML documentation for this project.'
    title = 'Project docs'
    outputDir = file("${buildDir}/docs")
}

task allDocs {
    group = JavaBasePlugin.DOCUMENTATION_GROUP
    description = 'Generates all documentation for this project.'
    dependsOn generateHtmlDocs

    doLast {
        logger.quiet('Generating all documentation...')
    }
}
```

§

## Improving task discoverability

Even new users to a build should be able to find crucial information quickly and effortlessly. In Gradle you can declare a `Task.setGroup(java.lang.String)` and a `Task.setDescription(java.lang.String)` for any task of the build. The tasks report uses the assigned values to organize and render the task for easy discoverability. Assigning a group and description is most helpful for any task that you expect build users to invoke.

The example task `generateDocs` generates documentation for a project in the form of HTML pages. The task should be organized underneath the bucket `Documentation`. The description should express its intent.

### Example 552. A task declaring the group and description

#### **build.gradle**

```
task generateDocs {
    group = 'Documentation'
    description = 'Generates the HTML documentation for this project.'

    doLast {
        // action implementation
    }
}
```

The output of the tasks report reflects the assigned values.

```
$ gradle tasks

> Task :tasks

Documentation tasks
-----
generateDocs - Generates the HTML documentation for this project.
```

§

## Minimize logic executed during the configuration phase

It's important for every build script developer to understand the different phases of the build lifecycle and their implications on performance and evaluation order of build logic. During the configuration phase the project and its domain objects should be *configured*, whereas the execution phase only executes the actions of the task(s) requested on the command line plus their dependencies. Be aware that any code that is not part of a task action will be executed with *every single run* of the build. A build scan can help you with identifying the time spent during each of the lifecycle phases. It's an invaluable tool for diagnosing common performance issues.

Let's consider the following incantation of the anti-pattern described above. In the build script you can see



that the dependencies assigned to the configuration `printArtifactNames` are resolved outside of the task action.

#### Example 553. Executing logic during configuration should be avoided

##### **build.gradle**

```
apply plugin: 'java-library'

repositories {
    jcenter()
}

dependencies {
    implementation 'log4j:log4j:1.2.17'
}

task printArtifactNames {
    // always executed
    def libraryNames = configurations.compileClasspath.collect { it.name }

    doLast {
        logger.quiet libraryNames
    }
}
```

The code for resolving the dependencies should be moved into the task action to avoid the performance impact of resolving the dependencies before they are actually needed.

#### Example 554. Executing logic during execution phase is preferred

##### **build.gradle**

```
apply plugin: 'java-library'

repositories {
    jcenter()
}

dependencies {
    implementation 'log4j:log4j:1.2.17'
}

task printArtifactNames {
    doLast {
        def libraryNames = configurations.compileClasspath.collect { it.name }
        logger.quiet libraryNames
    }
}
```

## §

### Avoiding the use of `GradleBuild`

The `GradleBuild` task type allows a build script to define a task that invokes another Gradle build. The use of this type is generally discouraged. There are some corner cases where the invoked build doesn't expose the same runtime behavior as from the command line or through the Tooling API leading to unexpected results.

Usually, there's a better way to model the requirement. The appropriate approach depends on the problem at hand. Here're some options:

Model the build as multi-project build if the intention is to execute tasks from different modules as unified build.

Use composite builds for projects that are physically separated but should occasionally be built as a single unit.

## §

### Avoiding inter-project configuration

Gradle does not restrict build script authors from reaching into the domain model from one project into another one in a multi-project build. Strongly-coupled projects hurts build execution performance as well as readability and maintainability of code.

The following practices should be avoided:

Explicitly depending on a task from another project via `Task.dependsOn(java.lang.Object[])`.

Setting property values or calling methods on domain objects from another project.

Executing another portion of the build with `GradleBuild`.

Declaring unnecessary project dependencies.

## §

### Avoiding passwords in plain text

Most builds need to consume one or many passwords. The reasons for this need may vary. Some builds need a password for publishing artifacts to a secured binary repository, other builds need a password for downloading binary files. Passwords should always kept safe to prevent fraud. Under no circumstance should you add the password to the build script as property in plain text or declare it in a `gradle.properties`. Those files usually live in a version control repository and can be viewed by anyone that has access to it.

Passwords should be stored in encrypted fashion. At the moment Gradle does not provide a built-in mechanism for encrypting, storing and accessing passwords. A good solution for solving this problem is the Gradle Credentials plugin.

# Organizing Gradle Projects

Source code and build logic of every software project should be organized in a meaningful way. This page lays out the best practices that lead to readable, maintainable projects. The following sections also touch on common problems and how to avoid them.

§

## Separate language-specific source files

Gradle's language plugins establish conventions for discovering and compiling source code. For example, a project applying the Java plugin will automatically compile the code in the directory `src/main/java`. Other language plugins follow the same pattern. The last portion of the directory path usually indicates the expected language of the source files.

Some compilers are capable of cross-compiling multiple languages in the same source directory. The Groovy compiler can handle the scenario of mixing Java and Groovy source files located in `src/main/groovy`. Gradle recommends that you place sources in directories according to their language, because builds are more performant and both the user and build can make stronger assumptions.

The following source tree contains Java and Kotlin source files. Java source files live in `src/main/java`, whereas Kotlin source files live in `src/main/kotlin`.

```
.
├── build.gradle
├── settings.gradle
└── src
    ├── main
    │   ├── java
    │   │   └── HelloWorld.java
    │   └── kotlin
    │       └── Utils.kt
```

§

## Separate source files per test type

It's very common that a project defines and executes different types of tests e.g. unit tests, integration tests, functional tests or smoke tests. Optimally, the test source code for each test type should be stored in dedicated source directories. Separated test source code has a positive impact on maintainability and separation of concerns as you can run test types independent from each other.

The following source tree demonstrates how to separate unit from integration tests in a Java-based project.

```
.
build.gradle
gradle
  integration-test.gradle
settings.gradle
src
  integTest
    java
      DefaultFileReaderIntegrationTest.java
  main
    java
      DefaultFileReader.java
      FileReader.java
      StringUtils.java
  test
    java
      StringUtilsTest.java
```

Gradle models source code directories with the help of the source set concept. By pointing an instance of a source set to one or many source code directories, Gradle will automatically create a corresponding compilation task out-of-the-box.

#### Example 555. Integration test source set

##### **gradle/integration-test.gradle**

```
sourceSets {
    integTest {
        java.srcDir file('src/integTest/java')
        resources.srcDir file('src/integTest/resources')
        compileClasspath += sourceSets.main.output + configurations.testRuntimeClasspath
        runtimeClasspath += output + compileClasspath
    }
}
```

Source sets are only responsible for compiling source code, but do not deal with executing the byte code. For the purpose of test execution, a corresponding task of type `Test` needs to be established.

### Example 556. Integration test task

#### **gradle/integration-test.gradle**

```
task integTest(type: Test) {
    description = 'Runs the integration tests.'
    group = 'verification'
    testClassesDirs = sourceSets.integTest.output.classesDirs
    classpath = sourceSets.integTest.runtimeClasspath
    mustRunAfter test
}

check.dependsOn integTest
```

## §

### Use standard conventions as much as possible

All Gradle core plugins follow the software engineering paradigm convention over configuration. The plugin logic provides users with sensible defaults and standards, the conventions, in a certain context. Let's take the Java plugin as an example.

It defines the directory `src/main/java` as the default source directory for compilation.

The output directory for compiled source code and other artifacts (like the JAR file) is `build`.

By sticking to the default conventions, new developers to the project immediately know how to find their way around. While those conventions can be reconfigured, it makes it harder to build script users and authors to manage the build logic and its outcome. Try to stick to the default conventions as much as possible except if you need to adapt to the layout of a legacy project. Refer to the reference page of the relevant plugin to learn about its default conventions.

## §

### Always define a settings file

Gradle tries to locate a `settings.gradle` (Groovy DSL) or a `settings.gradle.kts` (Kotlin DSL) file with every invocation of the build. For that purpose, the runtime walks the hierarchy of the directory tree up to the root directory. The algorithm stops searching as soon as it finds the settings file.

Always add a `settings.gradle` to the root directory of your build to avoid the initial performance impact. This recommendation applies to single project builds as well as multi-project builds. The file can either be empty or define the desired name of the project.

A typical Gradle project with a settings file look as such:

```
.
build.gradle
settings.gradle
```

## §

### Use `buildSrc` to abstract imperative logic

Complex build logic is usually a good candidate for being encapsulated either as custom task or binary plugin. Custom task and plugin implementations should not live in the build script. It is very convenient to use `buildSrc` for that purpose as long as the code does not need to be shared among multiple, independent projects.

The directory `buildSrc` is treated as an included build. Upon discovery of the directory, Gradle automatically compiles and tests this code and puts it in the classpath of your build script. For multi-project builds there can be only one `buildSrc` directory, which has to sit in the root project directory. `buildSrc` should be preferred over script plugins as it is easier to maintain, refactor and test the code.

`buildSrc` uses the same source code conventions applicable to Java and Groovy projects. It also provides direct access to the Gradle API. Additional dependencies can be declared in a dedicated `build.gradle` under `buildSrc`.

#### Example 557. Custom `buildSrc` build script

##### `buildSrc/build.gradle`

```
repositories {  
    mavenCentral()  
}  
  
dependencies {  
    testCompile 'junit:junit:4.12'  
}
```

A typical project including `buildSrc` has the following layout. Any code under `buildSrc` should use a package similar to application code. Optionally, the `buildSrc` directory can host a build script if additional configuration is needed (e.g. to apply plugins or to declare dependencies).

```

.
build.gradle
buildSrc
  build.gradle
  src
    main
      java
        com
          enterprise
            Deploy.java
            DeploymentPlugin.java
    test
      java
        com
          enterprise
            DeploymentPluginTest.java
settings.gradle

```

§

## Declare properties in `gradle.properties` file

In Gradle, properties can be define in the build script, in a `gradle.properties` file or as parameters on the command line.

It's common to declare properties on the command line for ad-hoc scenarios. For example you may want to pass in a specific property value to control runtime behavior just for this one invocation of the build. Properties in a build script can easily become a maintenance headache and convolute the build script logic. The `gradle.properties` helps with keeping properties separate from the build script and should be explored as viable option. It's a good location for placing properties that control the build environment.

A typical project setup places the `gradle.properties` file in the root directory of the build. Alternatively, the file can also live in the `GRADLE_USER_HOME` directory if you want to it apply to all builds on your machine.

```

.
build.gradle
gradle.properties
settings.gradle

```

§

## Avoid overlapping task outputs

Tasks should define inputs and outputs to get the performance benefits of incremental build functionality. When declaring the outputs of a task, make sure that the directory for writing outputs is unique among all the tasks in your project.

Intermingling or overwriting output files produced by different tasks compromises up-to-date checking causing slower builds. In turn, these filesystem changes may prevent Gradle's build cache from properly identifying and caching what would otherwise be cacheable tasks.

## §

### Standardizing builds with a custom Gradle distribution

Often enterprises want to standardize the build platform for all projects in the organization by defining common conventions or rules. You can achieve that with the help of initialization scripts. Initialization scripts make it extremely easy to apply build logic across all projects on a single machine. For example, to declare a in-house repository and its credentials.

There are some drawbacks to the approach. First of all, you will have to communicate the setup process across all developers in the company. Furthermore, updating the initialization script logic uniformly can prove challenging.

Custom Gradle distributions are a practical solution to this very problem. A custom Gradle distribution is comprised of the standard Gradle distribution plus one or many custom initialization scripts. The initialization scripts come bundled with the distribution and are applied every time the build is run. Developers only need to point their checked-in Wrapper files to the URL of the custom Gradle distribution.

The following steps are typical for creating a custom Gradle distribution:

Implement logic for downloading and repackaging a Gradle distribution.

Define one or many initialization scripts with the desired logic.

Bundle the initialization scripts with the Gradle distribution.

Upload the Gradle distribution archive to a HTTP server.

Change the Wrapper files of all projects to point to the URL of the custom Gradle distribution.

You can find a sample project that covers steps one to three in the `samples` directory of the standard `-all` Gradle distribution.



# The Software model

# Rule based model configuration

**Note:** Rule based configuration will be deprecated. New plugins should not use this concept.

Rule based model configuration enables *configuration logic to itself have dependencies* on other elements of configuration, and to make use of the resolved states of those other elements of configuration while performing its own configuration.

§

## Background

In a nutshell, the Software Model is a very declarative way to describe how a piece of software is built and the other components it needs as dependencies in the process. It also provides a new, rule-based engine for configuring a Gradle build. When we started to implement the software model we set ourselves the following goals:

Improve configuration and execution time performance.

Make customizations of builds with complex tool chains easier.

Provide a richer, more standardized way to model different software ecosystems.

Gradle drastically improved configuration performance through other measures. There is no longer any need for a drastic, incompatible change in how Gradle builds are configured. Gradle's support for building native software and Play Framework applications still use the configuration model.

§

## Basic Concepts

§

### The “model space”

The term “model space” is used to refer to the formal model, which can be read and modified by rules.

A counterpart to the model space is the “project space”, which should be familiar to readers. The “project space” is a graph of objects (e.g `project.repositories`, `project.tasks` etc.) having a `Project` as its root. A build script is effectively adding and configuring objects of this graph. For the most part, the “project space” is opaque to Gradle. It is an arbitrary graph of objects that Gradle only partially understands.

Each project also has its own model space, which is distinct from the project space. A key characteristic of the “model space” is that Gradle knows much more about it (which is knowledge that can be put to good use). The objects in the model space are “managed”, to a greater extent than objects in the project space. The origin, structure, state, collaborators and relationships of objects in the model space are first class constructs. This is effectively the characteristic that functionally distinguishes the model space from the project space: the objects of the model space are defined in ways that Gradle can understand them intimately, as opposed to an object that is the result of running relatively opaque code. A “rule” is effectively a building block of this definition.

The model space will eventually replace the project space, becoming the only “space”.

§

### Rules

The model space is defined by “rules”. A rule is just a function (in the abstract sense) that either produces a model element, or acts upon a model element. Every rule has a single subject and zero or more inputs. Only the subject can be changed by a rule, while the inputs are effectively immutable.

Gradle guarantees that all inputs are fully “realized” before the rule executes. The process of “realizing” a model element is effectively executing all the rules for which it is the subject, transitioning it to its final state. There is a strong analogy here to Gradle’s task graph and task execution model. Just as tasks depend on each other and Gradle ensures that dependencies are satisfied before executing a task, rules effectively depend on each other (i.e. a rule depends on all rules whose subject is one of the inputs) and Gradle ensures that all dependencies are satisfied before executing the rule.

Model elements are very often defined in terms of other model elements. For example, a compile task’s configuration can be defined in terms of the configuration of the source set that it is compiling. In this scenario, the compile task would be the subject of a rule and the source set an input. Such a rule could configure the task subject based on the source set input without concern for how it was configured, who it was configured by or when the configuration was specified.

There are several ways to declare rules, and in several forms.

§

## Rule sources

One way to define rules is via a `RuleSource` subclass. If an object extends `RuleSource` and contains any methods annotated by '@Mutate', then each such method defines a rule. For each such method, the first argument is the subject, and zero or more subsequent arguments may follow and are inputs of the rule.

### Example 558. applying a rule source plugin

**build.gradle**

```
@Managed
interface Person {
    void setFirstName(String name)
    String getFirstName()

    void setLastName(String name)
    String getLastName()
}

class PersonRules extends RuleSource {
    @Model void person(Person p) {}

    //Create a rule that modifies a Person and takes no other inputs
    @Mutate void setFirstName(Person p) {
        p.firstName = "John"
    }

    //Create a rule that modifies a ModelMap<Task> and takes as input a Person
    @Mutate void createHelloTask(ModelMap<Task> tasks, Person p) {
        tasks.create("hello") {
            doLast {
                println "Hello $p.firstName $p.lastName!"
            }
        }
    }
}

apply plugin: PersonRules
```

### Output of **gradle hello**

```
> gradle hello

> Task :hello
Hello John Smith!

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

Each of the different methods of the rule source are discrete, independent rules. Their order, or the fact that they belong to the same class, do not affect their behavior.

#### Example 559. a model creation rule

##### build.gradle

```
@Model void person(Person p) {}
```

This rule declares that there is a model element at path "person" (defined by the method name), of type `Person`. This is the form of the `Model` type rule for `Managed` types. Here, the person object is the rule subject. The method could potentially have a body, that mutated the person instance. It could also potentially have more parameters, which would be the rule inputs.

#### Example 560. a model mutation rule

##### build.gradle

```
//Create a rule that modifies a Person and takes no other inputs
@Mutate void setFirstName(Person p) {
    p.firstName = "John"
}
```

This `Mutate` rule mutates the person object. The first parameter to the method is the subject. Here, a by-type reference is used as no `Path` annotation is present on the parameter. It could also potentially have more parameters, that would be the rule inputs.

#### Example 561. creating a task

##### build.gradle

```
//Create a rule that modifies a ModelMap<Task> and takes as input a Person
@Mutate void createHelloTask(ModelMap<Task> tasks, Person p) {
    tasks.create("hello") {
        doLast {
            println "Hello $p.firstName $p.lastName!"
        }
    }
}
```

This `Mutate` rule effectively adds a task, by mutating the tasks collection. The subject here is the "tasks" node, which is available as a `ModelMap` of `Task`. The only input is our person element. As the person is being used as an input here, it will have been realised before executing this rule. That is, the task container effectively *depends on* the person element. If there are other configuration rules for the person element, potentially specified in a build script or other plugin, they will also be guaranteed to have been executed.

As `Person` is a `Managed` type in this example, any attempt to modify the person parameter in this method would result in an exception being thrown. Managed objects enforce immutability at the appropriate point in their lifecycle.

Rule source plugins can be packaged and distributed in the same manner as other types of plugins (see

*Writing Custom Plugins*). They also may be applied in the same manner (to project objects) as [Plugin](#) implementations (i.e. via `Project.apply(java.util.Map)`).

Please see the documentation for [RuleSource](#) for more information on constraints on how rule sources must be implemented and for more types of rules.

§

## Advanced Concepts

§

### Model paths

A model path identifies the location of an element relative to the root of its model space. A common representation is a period-delimited set of names. For example, the model path `"tasks"` is the path to the element that is the task container. Assuming a task whose name is `hello`, the path `"tasks.hello"` is the path to this task.

§

### Managed model elements

Currently, any kind of Java object can be part of the model space. However, there is a difference between “managed” and “unmanaged” objects.

A “managed” object is transparent and enforces immutability once realized. Being transparent means that its structure is understood by the rule infrastructure and as such each of its properties are also individual elements in the model space.

An “unmanaged” object is opaque to the model space and does not enforce immutability. Over time, more mechanisms will be available for defining managed model elements culminating in all model elements being managed in some way.

Managed models can be defined by attaching the `@Managed` annotation to an interface:

#### Example 562. a managed type

**build.gradle**

```
@Managed
interface Person {
    void setFirstName(String name)
    String getFirstName()

    void setLastName(String name)
    String getLastName()
}
```

By defining a getter/setter pair, you are effectively declaring a managed property. A managed property is a property for which Gradle will enforce semantics such as immutability when a node of the model is not the

subject of a rule. Therefore, this example declares properties named *firstName* and *lastName* on the managed type *Person*. These properties will only be writable when the view is mutable, that is to say when the *Person* is the subject of a *Rule* (see below the explanation for rules).

Managed properties can be of any scalar type. In addition, properties can also be of any type which is itself managed:

Property type	Nullable	Example
String	Yes	<b>Example 563. a String property</b>  <b>build.gradle</b> <pre>void setFirstName(String name) String getFirstName()</pre>
File	Yes	<b>Example 564. a File property</b>  <b>build.gradle</b> <pre>void setHomeDirectory(File homeDir) File getHomeDirectory()</pre>
Integer, Boolean, Byte, Short, Float, Long, Double	Yes	<b>Example 565. a Long property</b>  <b>build.gradle</b> <pre>void setId(Long id) Long getId()</pre>
int, boolean, byte, short, float, long, double	No	<b>Example 566. a boolean property</b>  <b>build.gradle</b> <pre>void setEmployed(boolean isEmployed) boolean isEmployed()</pre> <b>Example 567. an int property</b>  <b>build.gradle</b> <pre>void setAge(int age) int getAge()</pre>
Another <i>managed</i> type.	Only if read/write	<b>Example 568. a managed property</b>  <b>build.gradle</b> <pre>void setMother(Person mother) Person getMother()</pre>
An <i>enumeration</i> type.	Yes	<b>Example 569. an enumeration type property</b>  <b>build.gradle</b> <pre>void setMaritalStatus(MaritalStatus status) MaritalStatus getMaritalStatus()</pre>
A <i>ManagedSet</i> . A managed set supports the creation of new named model elements, but not	Only if read/write	

their removal.		<b>Example 570. a managed set</b>  <b>build.gradle</b> ModelSet<Person> getChildren() 
A Set or List of scalar types. All classic operations on collections are supported: add, remove, clear...	Only if read/write	<b>Example 571. a scalar collection</b>  <b>build.gradle</b> void setUserGroups(List<String> groups) List<String> getUserGroups() 

If the type of a property is itself a managed type, it is possible to declare only a getter, in which case you are declaring a read-only property. A read-only property will be instantiated by Gradle, and cannot be replaced with another object of the same type (for example calling a setter). However, the properties of that property can potentially be changed, if, and only if, the property is the subject of a rule. If it's not the case, the property is immutable, like any classic read/write managed property, and properties of the property cannot be changed at all.

Managed types can be defined out of interfaces or abstract classes and are usually defined in plugins, which are written either in Java or Groovy. Please see the [Managed](#) annotation for more information on creating managed model objects.

§

## Model element types

There are particular types (language types) supported by the model space and can be generalised as follows:

**Table 80. Type definitions**

type	Definition
scalar	A scalar type is one of the following: <ul style="list-style-type: none"> <li>• a primitive type (e.g. <code>int</code>) or its boxed type (e.g. <code>Integer</code>)</li> <li>• a <code>BigInteger</code> or <code>BigDecimal</code></li> <li>• a <code>String</code></li> <li>• a <code>File</code></li> <li>• an enumeration type</li> </ul>
scalar Collection	A <code>java.util.List</code> or <code>java.util.Set</code> containing one of the scalar types
managed type	Any class which is a valid managed model (i.e. annotated with <code>@Managed</code> )
managed collection	A <code>ModelMap</code> or <code>ModelSet</code>



There are various contexts in which these types can be used:

Table 81. Model type support

Context	Supported types
Creating top level model elements	<ul style="list-style-type: none"><li>Any managed type</li><li><code>FunctionalSourceSet</code> (when the <code>LanguageBasePlugin</code> plugin has been applied)</li><li>Subtypes of <code>LanguageSourceSet</code> which have been registered via <code>ComponentType</code></li></ul>
Properties of managed model elements	<p>The properties (attributes) of a managed model elements may be one or more of the following:</p> <ul style="list-style-type: none"><li>A managed type</li><li>A type which is annotated with <code>@Unmanaged</code></li><li>A Scalar Collection</li><li>A Managed collection containing managed types</li><li>A Managed collection containing <code>FunctionalSourceSet</code>'s (when the <code>LanguageBasePlugin</code> plugin has been applied)</li><li>Subtypes of <code>LanguageSourceSet</code> which have been registered via <code>ComponentType</code></li></ul>

§

Language source sets

`FunctionalSourceSets` and subtypes of `LanguageSourceSet` (which have been registered via `ComponentType`) can be added to the model space via rules or via the model DSL.

## Example 572. strongly modelling sources sets

### build.gradle

```
apply plugin: 'java-lang'

//Creating LanguageSourceSets via rules
class LanguageSourceSetRules extends RuleSource {
    @Model
    void mySourceSet(JavaSourceSet javaSource) {
        javaSource.source.srcDir("src/main/my")
    }
}
apply plugin: LanguageSourceSetRules

//Creating LanguageSourceSets via the model DSL
model {
    another(JavaSourceSet) {
        source {
            srcDir "src/main/another"
        }
    }
}

//Using FunctionalSourceSets
@Managed
interface SourceBundle {
    FunctionalSourceSet getFreeSources()
    FunctionalSourceSet getPaidSources()
}
model {
    sourceBundle(SourceBundle) {
        freeSources.create("main", JavaSourceSet)
        freeSources.create("resources", JvmResourceSet)
        paidSources.create("main", JavaSourceSet)
        paidSources.create("resources", JvmResourceSet)
    }
}
```

**Note:** The code for this example can be found at `samples/modelRules/language-support` in the ‘-all’ distribution of Gradle.

### Output of `gradle help`

```
> gradle help

> Task :help
```

§

## References, binding and scopes

As previously mentioned, a rule has a subject and zero or more inputs. The rule's subject and inputs are declared as "references" and are "bound" to model elements before execution by Gradle. Each rule must effectively forward declare the subject and inputs as references. Precisely how this is done depends on the form of the rule. For example, the rules provided by a `RuleSource` declare references as method parameters.

A reference is either "by-path" or "by-type".

A "by-type" reference identifies a particular model element by its type. For example, a reference to the `TaskContainer` effectively identifies the "tasks" element in the project model space. The model space is not exhaustively searched for candidates for by-type binding; rather, a rule is given a scope (discussed later) that determines the search space for a by-type binding.

A "by-path" reference identifies a particular model element by its path in model space. By-path references are always relative to the rule scope; there is currently no way to path "out" of the scope. All by-path references also have an associated type, but this does not influence what the reference binds to. The element identified by the path must however be type compatible with the reference, or a fatal "binding failure" will occur.

§

## Binding scope

Rules are bound within a "scope", which determines how references bind. Most rules are bound at the project scope (i.e. the root of the model graph for the project). However, rules can be scoped to a node within the graph. The `ModelMap.named(java.lang.String, java.lang.Class)` method is an example of a mechanism for applying scoped rules. Rules declared in the build script using the `model {}` block, or via a `RuleSource` applied as a plugin use the root of the model space as the scope. This can be considered the default scope.

By-path references are always relative to the rule scope. When the scope is the root, this effectively allows binding to any element in the graph. When it is not, then only the children of the scope can be referenced using "by-path" notation.

When binding by-type references, the following elements are considered:

The scope element itself.

The immediate children of the scope element.

The immediate children of the model space (i.e. project space) root.

For the common case, where the rule is effectively scoped to the root, only the immediate children of the root need to be considered.

§

Binding to all elements in a scope matching type

Mutating or validating all elements of a given type in some scope is a common use-case. To accommodate this, rules can be applied via the `@Each` annotation.

In the example below, a `@Defaults` rule is applied to each `FileItem` in the model setting a default file size of "1024". Another rule applies a `RuleSource` to every `DirectoryItem` that makes sure all file sizes are positive and divisible by "16".

**Example 573. a DSL example applying a rule to every element in a scope**

**build.gradle**

```

@Managed interface Item extends Named {}
@Managed interface FileItem extends Item {
    void setSize(int size)
    int getSize()
}
@Managed interface DirectoryItem extends Item {
    ModelMap<Item> getChildren()
}

class PluginRules extends RuleSource {
    @Defaults void setDefaultFileSize(@Each FileItem file) {
        file.size = 1024
    }

    @Rules void applyValidateRules(ValidateRules rules, @Each DirectoryItem dire
}
apply plugin: PluginRules

abstract class ValidateRules extends RuleSource {
    @Validate
    void validateSizeIsPositive(ModelMap<FileItem> files) {
        files.each { file ->
            assert file.size > 0
        }
    }

    @Validate
    void validateSizeDivisibleBySixteen(ModelMap<FileItem> files) {
        files.each { file ->
            assert file.size % 16 == 0
        }
    }
}

model {
    root(DirectoryItem) {
        children {
            dir(DirectoryItem) {
                children {
                    file1(FileItem)
                    file2(FileItem) { size = 2048 }
                }
            }
            file3(FileItem)
        }
    }
}

```

**Note:** The code for this example can be found at `samples/modelRules/ruleSourcePluginEach` in the ‘-all’ distribution of Gradle.

§

## The model DSL

In addition to using a `RuleSource`, it is also possible to declare a model and rules directly in a build script using the “model DSL”.

**Tip:** The model DSL makes heavy use of various Groovy DSL features. Please have a read of the section called “Some Groovy basics” for an introduction to these Groovy features.

The general form of the model DSL is:

```
model {  
    «rule-definitions»  
}
```

All rules are nested inside a `model` block. There may be any number of rule definitions inside each `model` block, and there may be any number of `model` blocks in a build script. You can also use a `model` block in build scripts that are applied using `apply from: $uri`.

There are currently 2 kinds of rule that you can define using the model DSL: configuration rules, and creation rules.

§

### Configuration rules

You can define a rule that configures a particular model element. A configuration rule has the following form:

```
model {  
    «model-path-to-subject» {  
        «configuration code»  
    }  
}
```

Continuing with the example so far of the model element `"person"` of type `Person` being present, the following DSL snippet adds a configuration rule for the person that sets its `lastName` property.

#### Example 574. DSL configuration rule

##### build.gradle

```
model {  
    person {  
        lastName = "Smith"  
    }  
}
```

A configuration rule specifies a path to the subject that should be configured and a closure containing the code to run when the subject is configured. The closure is executed with the subject passed as the closure delegate. Exactly what code you can provide in the closure depends on the type of the subject. This is discussed below.

You should note that the configuration code is not executed immediately but is instead executed only when the subject is required. This is an important behaviour of model rules and allows Gradle to configure only those elements that are required for the build, which helps reduce build time. For example, let's run a task that uses the "person" object:

#### Example 575. Configuration run when required

##### build.gradle

```
model {  
    person {  
        println "configuring person"  
        lastName = "Smith"  
    }  
}
```

##### Output of `gradle showPerson`

```
> gradle showPerson  
configuring person  
  
> Task :showPerson  
Hello John Smith!  
  
BUILD SUCCESSFUL in 0s  
1 actionable task: 1 executed
```

You can see that before the task is run, the "person" element is configured by running the rule closure. Now let's run a task that does not require the "person" element:

### Example 576. Configuration not run when not required

#### Output of `gradle somethingElse`

```
> gradle somethingElse

> Task :somethingElse
Not using person

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

In this instance, you can see that the "person" element is not configured at all.

§

#### Creation rules

It is also possible to create model elements at the root level. The general form of a creation rule is:

```
model {
    «element-name»(«element-type») {
        «initialization code»
    }
}
```

The following model rule creates the "person" element:

### Example 577. DSL creation rule

#### **build.gradle**

```
model {
    person(Person) {
        firstName = "John"
    }
}
```

A creation rule definition specifies the path of the element to create, plus its public type, represented as a Java interface or class. Only certain types of model elements can be created.

A creation rule may also provide a closure containing the initialization code to run when the element is created. The closure is executed with the element passed as the closure delegate. Exactly what code you can provide in the closure depends on the type of the subject. This is discussed below.

The initialization closure is optional and can be omitted, for example:



### Example 578. DSL creation rule without initialization

#### build.gradle

```
model {  
    barry(Person)  
}
```

You should note that the initialization code is not executed immediately but is instead executed only when the element is required. The initialization code is executed before any configuration rules are run. For example:

### Example 579. Initialization before configuration

#### build.gradle

```
model {  
    person {  
        println "configuring person"  
        println "last name is $lastName, should be Smythe"  
        lastName = "Smythe"  
    }  
    person(Person) {  
        println "creating person"  
        firstName = "John"  
        lastName = "Smith"  
    }  
}
```

#### Output of `gradle showPerson`

```
> gradle showPerson  
creating person  
configuring person  
last name is Smith, should be Smythe  
  
> Task :showPerson  
Hello John Smythe!  
  
BUILD SUCCESSFUL in 0s  
1 actionable task: 1 executed
```

Notice that the creation rule appears in the build script *after* the configuration rule, but its code runs before the code of the configuration rule. Gradle collects up all the rules for a particular subject before running any of them, then runs the rules in the appropriate order.

§

### Model rule closures

Most DSL rules take a closure containing some code to run to configure the subject. The code you can use in this closure depends on the type of the subject of the rule.

**Tip:** You can use the model report to determine the type of a particular model element.

In general, a rule closure may contain arbitrary code, mixed with some type specific DSL syntax.

```
$
ModelMap<T> subject
```

A `ModelMap` is basically a map of model elements, indexed by some name. When a `ModelMap` is used as the subject of a DSL rule, the rule closure can use any of the methods defined on the `ModelMap` interface.

A rule closure with `ModelMap` as a subject can also include nested creation or configuration rules. These behave in a similar way to the creation and configuration rules that appear directly under the `model` block.

Here is an example of a nested creation rule:

#### Example 580. Nested DSL creation rule

```
build.gradle
model {
    people {
        john(Person) {
            firstName = "John"
        }
    }
}
```

As before, a nested creation rule defines a name and public type for the element, and optionally, a closure containing code to use to initialize the element. The code is run only when the element is required in the build.

Here is an example of a nested configuration rule:

#### Example 581. Nested DSL configuration rule

```
build.gradle
model {
    people {
        john {
            lastName = "Smith"
        }
    }
}
```

As before, a nested configuration rule defines the name of the element to configure and a closure containing code to use to configure the element. The code is run only when the element is required in the build.

`ModelMap` introduces several other kinds of rules. For example, you can define a rule that targets each of the elements in the map. The code in the rule closure is executed once for each element in the map, when that element is required. Let's run a task that requires all of the children of the "people" element:

### Example 582. DSL configuration rule for each element in a map

#### build.gradle

```
model {
    people {
        john(Person) {
            println "creating $it"
            firstName = "John"
            lastName = "Smith"
        }
        all {
            println "configuring $it"
        }
        barry(Person) {
            println "creating $it"
            firstName = "Barry"
            lastName = "Barry"
        }
    }
}
```

#### Output of `gradle listPeople`

```
> gradle listPeople
creating Person 'people.barry'
configuring Person 'people.barry'
creating Person 'people.john'
configuring Person 'people.john'

> Task :listPeople
Hello Barry Barry!
Hello John Smith!

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

Any method on [ModelMap](#) that accepts an [Action](#) as its last parameter can also be used to define a nested rule.

\$

`@Managed` type subject

When a managed type is used as the subject of a DSL rule, the rule closure can use any of the methods defined on the managed type interface.

A rule closure can also configure the properties of the element using nested closures. For example:

### Example 583. Nested DSL property configuration

#### build.gradle

```
model {  
    person {  
        address {  
            city = "Melbourne"  
        }  
    }  
}
```

**Note:** Currently, the nested closures do not define rules and are executed immediately. Please be aware that this behaviour will change in a future Gradle release.

§

All other subjects

For all other types, the rule closure can use any of the methods defined by the type. There is no special DSL defined for these elements.

§

Automatic type coercion

Scalar properties in managed types can be assigned `CharSequence` values (e.g. `String`, `GString`, etc.) and they will be converted to the actual property type for you. This works for all scalar types including `File`'s, which will be resolved relative to the current project.

### Example 584. a DSL example showing type conversions

#### build.gradle

```
enum Temperature {  
    TOO_HOT,  
    TOO_COLD,  
    JUST_RIGHT  
}  
  
@Managed  
interface Item {  
    void setName(String n); String getName()  
  
    void setQuantity(int q); int getQuantity()  
  
    void setPrice(float p); float getPrice()  
  
    void setTemperature(Temperature t)  
    Temperature getTemperature()  
  
    void setDataFile(File f); File getDataFile()  
}
```

```

class ItemRules extends RuleSource {
  @Model
  void item(Item item) {
    def data = item.dataFile.text.trim()
    def (name, quantity, price, temp) = data.split(',')
    item.name = name
    item.quantity = quantity
    item.price = price
    item.temperature = temp
  }

  @Defaults
  void setDefaults(Item item) {
    item.dataFile = 'data.csv'
  }

  @Mutate
  void createDataTask(ModelMap<Task> tasks, Item item) {
    tasks.create('showData') {
      doLast {
        println ""
        Item '$item.name'
        quantity:    $item.quantity
        price:       $item.price
        temperature: $item.temperature""
      }
    }
  }
}

apply plugin: ItemRules

model {
  item {
    price = "${price * (quantity < 10 ? 2 : 0.5)}"
  }
}

```

```
}
}
```

**Note:** The code for this example can be found at `samples/modelRules/modelDslCoercion` in the ‘-all’ distribution of Gradle.

In the above example, an `Item` is created and is initialized in `setDefaults()` by providing the path to the data file. In the `item()` method the resolved `File` is parsed to extract and set the data. In the DSL block at the end, the price is adjusted based on the quantity; if there are fewer than 10 remaining the price is doubled, otherwise it is reduced by 50%. The `GString` expression is a valid value since it resolves to a `float` value in string form.

Finally, in `createDataTask()` we add the `showData` task to display all of the configured values.

§

## Declaring input dependencies

Rules declared in the DSL may *depend* on other model elements through the use of a special syntax, which is of the form:

```
$.«path-to-model-element»
```

Paths are a period separated list of identifiers. To directly depend on the `firstName` of the person, the following could be used:

```
$.person.firstName
```

### Example 585. a DSL rule using inputs

#### build.gradle

```
model {
    tasks {
        hello(Task) {
            def p = $.person
            doLast {
                println "Hello $p.firstName $p.lastName!"
            }
        }
    }
}
```

**Note:** The code for this example can be found at `samples/modelRules/modelDsl` in the ‘-all’ distribution of Gradle.

In the above snippet, the `$.person` construct is an input reference. The construct returns the value of the model element at the specified path, as its default type (i.e. the type advertised by the Model Report). It may appear anywhere in the rule that an expression may normally appear. It is not limited to the right hand side

of variable assignments.

The input element is guaranteed to be fully configured before the rule executes. That is, all of the rules that mutate the element are guaranteed to have been previously executed, leaving the target element in its final, immutable, state.

Most model elements enforce immutability when being used as inputs. Any attempt to mutate such an element will result in a runtime error. However, some legacy type objects do not currently implement such checks. Regardless, it is always invalid to attempt to mutate an input to a rule.

§

Using `ModelMap<T>` as an input

When you use a `ModelMap` as input, each item in the map is made available as a property.

§

## The model report

The built-in `ModelReport` task displays a hierarchical view of the elements in the model space. Each item prefixed with a + on the model report is a model element and the visual nesting of these elements correlates to the model path (e.g. `tasks.help`). The model report displays the following details about each model element:

**Table 82. Model report - model element details**

etail	Description
ype	This is the underlying type of the model element and is typically a fully qualified class name.
alue	Is conditionally displayed on the report when a model element can be represented as a string.
reator	Every model element has a creator. A creator signifies the origin of the model element (i.e. what created the model element).
ules	Is a listing of the rules, excluding the creator rule, which are executed for a given model element. The order in which the rules are displayed reflects the order in which they are executed.

### Example 586. model task output

#### Output of `gradle model`

```
> gradle model

> Task :model

-----
Root project
-----
```

```

+ person
  | Type:      Person
  | Creator:    PersonRules#person(Person)
  | Rules:
    person { ... } @ build.gradle line 59, column 3
    PersonRules#setFirstName(Person)
+ age
  | Type:      int
  | Value:     0
  | Creator:    PersonRules#person(Person)
+ children
  | Type:      org.gradle.model.ModelSet<Person>
  | Creator:    PersonRules#person(Person)
+ employed
  | Type:      boolean
  | Value:     false
  | Creator:    PersonRules#person(Person)
+ father
  | Type:      Person
  | Value:     null
  | Creator:    PersonRules#person(Person)
+ firstName
  | Type:      java.lang.String
  | Value:     John
  | Creator:    PersonRules#person(Person)
+ homeDirectory
  | Type:      java.io.File
  | Value:     null
  | Creator:    PersonRules#person(Person)
+ id
  | Type:      java.lang.Long
  | Value:     null
  | Creator:    PersonRules#person(Person)
+ lastName
  | Type:      java.lang.String
  | Value:     Smith
  | Creator:    PersonRules#person(Person)
+ maritalStatus
  | Type:      MaritalStatus
  | Creator:    PersonRules#person(Person)
+ mother
  | Type:      Person
  | Value:     null
  | Creator:    PersonRules#person(Person)
+ userGroups
  | Type:      java.util.List<java.lang.String>
  | Value:     null
  | Creator:    PersonRules#person(Person)

```



```

+ tasks
  | Type:      org.gradle.model.ModelMap<org.gradle.api.Task>
  | Creator:    Project.<init>.tasks()
  | Rules:
    PersonRules#createHelloTask(ModelMap<Task>, Person)
+ buildEnvironment
  | Type:      org.gradle.api.tasks.diagnostics.BuildEnvironmentReportTask
  | Value:      task ':buildEnvironment'
  | Creator:    Project.<init>.tasks.buildEnvironment()
  | Rules:
    copyToTaskContainer
+ components
  | Type:      org.gradle.api.reporting.components.ComponentReport
  | Value:      task ':components'
  | Creator:    Project.<init>.tasks.components()
  | Rules:
    copyToTaskContainer
+ dependencies
  | Type:      org.gradle.api.tasks.diagnostics.DependencyReportTask
  | Value:      task ':dependencies'
  | Creator:    Project.<init>.tasks.dependencies()
  | Rules:
    copyToTaskContainer
+ dependencyInsight
  | Type:      org.gradle.api.tasks.diagnostics.DependencyInsightReportTask
  | Value:      task ':dependencyInsight'
  | Creator:    Project.<init>.tasks.dependencyInsight()
  | Rules:
    copyToTaskContainer
+ dependentComponents
  | Type:      org.gradle.api.reporting.dependents.DependentComponentsReportTask
  | Value:      task ':dependentComponents'
  | Creator:    Project.<init>.tasks.dependentComponents()
  | Rules:
    copyToTaskContainer
+ hello
  | Type:      org.gradle.api.Task
  | Value:      task ':hello'
  | Creator:    PersonRules#createHelloTask(ModelMap<Task>, Person) > c
  | Rules:
    copyToTaskContainer
+ help
  | Type:      org.gradle.configuration.Help
  | Value:      task ':help'
  | Creator:    Project.<init>.tasks.help()
  | Rules:
    copyToTaskContainer
+ init
  | Type:      org.gradle.buildinit.tasks.InitBuild

```

```

    | Value:      task ':init'
    | Creator:    Project.<init>.tasks.init()
    | Rules:
      copyToTaskContainer
+ model
    | Type:      org.gradle.api.reporting.model.ModelReport
    | Value:      task ':model'
    | Creator:    Project.<init>.tasks.model()
    | Rules:
      copyToTaskContainer
+ projects
    | Type:      org.gradle.api.tasks.diagnostics.ProjectReportTask
    | Value:      task ':projects'
    | Creator:    Project.<init>.tasks.projects()
    | Rules:
      copyToTaskContainer
+ properties
    | Type:      org.gradle.api.tasks.diagnostics.PropertyReportTask
    | Value:      task ':properties'
    | Creator:    Project.<init>.tasks.properties()
    | Rules:
      copyToTaskContainer
+ tasks
    | Type:      org.gradle.api.tasks.diagnostics.TaskReportTask
    | Value:      task ':tasks'
    | Creator:    Project.<init>.tasks.tasks()
    | Rules:
      copyToTaskContainer
+ wrapper
    | Type:      org.gradle.api.tasks.wrapper.Wrapper
    | Value:      task ':wrapper'
    | Creator:    Project.<init>.tasks.wrapper()

```

```
| Rules:
    copyToTaskContainer
```

## §

### Limitations and future direction

*The rule engine that was part of the Software Model will be deprecated.* Everything under the model block will be ported as extensions to the current model. Native users will no longer have a separate extension model compared to the rest of the Gradle community, and they will be able to make use of the new variant aware dependency management. For more information, see the blog post on the state and future of the software model.

# Software model concepts

**Note:** Support for the software model is currently incubating. Please be aware that the DSL, APIs and other configuration may change in later Gradle versions.

The software model describes how a piece of software is built and how the components of the software relate to each other. The software model is organized around some key concepts:

A *component* is a general concept that represents some logical piece of software. Examples of components are a command-line application, a web application or a library. A component is often composed of other components. Most Gradle builds will produce at least one component.

A *library* is a reusable component that is linked into or combined into some other component. In the Java ecosystem, a library is often built as a Jar file, and then later bundled into an application of some kind. In the native ecosystem, a library may be built as a shared library or static library, or both.

A *source set* represents a logical group of source files. Most components are built from source sets of various languages. Some source sets contain source that is written by hand, and some source sets may contain source that is generated from something else.

A *binary* represents some output that is built for a component. A component may produce multiple different output binaries. For example, for a C++ library, both a shared library and a static library binary may be produced. Each binary is initially configured to be built from the component sources, but additional source sets can be added to specific binary variants.

A *variant* represents some mutually exclusive binary of a component. A library, for example, might target Java 7 and Java 8, effectively producing two distinct binaries: a Java 7 Jar and a Java 8 Jar. These are different variants of the library.

The *API* of a library represents the artifacts and dependencies that are required to compile against that library. The API typically consists of a binary together with a set of dependencies.

# Implementing model rules in a plugin

A plugin can define rules by extending `RuleSource` and adding methods that define the rules. The plugin class can either extend `RuleSource` directly or can implement `Plugin` and include a nested `RuleSource` subclass.

Refer to the API docs for `RuleSource` for more details.

§

## Applying additional rules

A rule method annotated with `Rules` can apply a `RuleSource` to a target model element.

# Building Play applications

**Note:** Support for building Play applications is currently incubating. Please be aware that the DSL, APIs and other configuration may change in later Gradle versions.

Play is a modern web application framework. The Play plugin adds support for building, testing and running Play applications with Gradle.

The Play plugin makes use of the Gradle software model.

§

## Usage

To use the Play plugin, include the following in your build script to apply the `play` plugin and add the Lightbend repositories:

### Example 587. Using the Play plugin

#### **build.gradle**

```
plugins {  
    id 'play'  
}  
  
repositories {  
    jcenter()  
    maven {  
        name "lightbend-maven-release"  
        url "https://repo.lightbend.com/lightbend/maven-releases"  
    }  
    ivy {  
        name "lightbend-ivy-release"  
        url "https://repo.lightbend.com/lightbend/ivy-releases"  
        layout "ivy"  
    }  
}
```

Note that defining the Lightbend repositories is necessary. In future versions of Gradle, this will be replaced with a more convenient syntax.

§

## Limitations

The Play plugin currently has a few limitations.

Gradle does not yet support aggregate reverse routes introduced in Play 2.4.x.

A given project may only define a single Play application. This means that a single project cannot build more than one Play application. However, a multi-project build can have many projects that each define their own Play application.

Play applications can only target a single “platform” (combination of Play, Scala and Java version) at a time. This means that it is currently not possible to define multiple variants of a Play application that, for example, produce jars for both Scala 2.10 and 2.11. This limitation may be lifted in future Gradle versions.


Support for generating IDE configurations for Play applications is limited to IDEA.

§

## Software Model

The Play plugin uses a *software model* to describe a Play application and how to build it. The Play software model extends the base Gradle software model to add support for building Play applications. A Play application is represented by a `PlayApplicationSpec` component type. The plugin automatically creates a single `PlayApplicationBinarySpec` instance when it is applied. Additional Play components cannot be added to a project.

Figure 35. Play plugin - software model

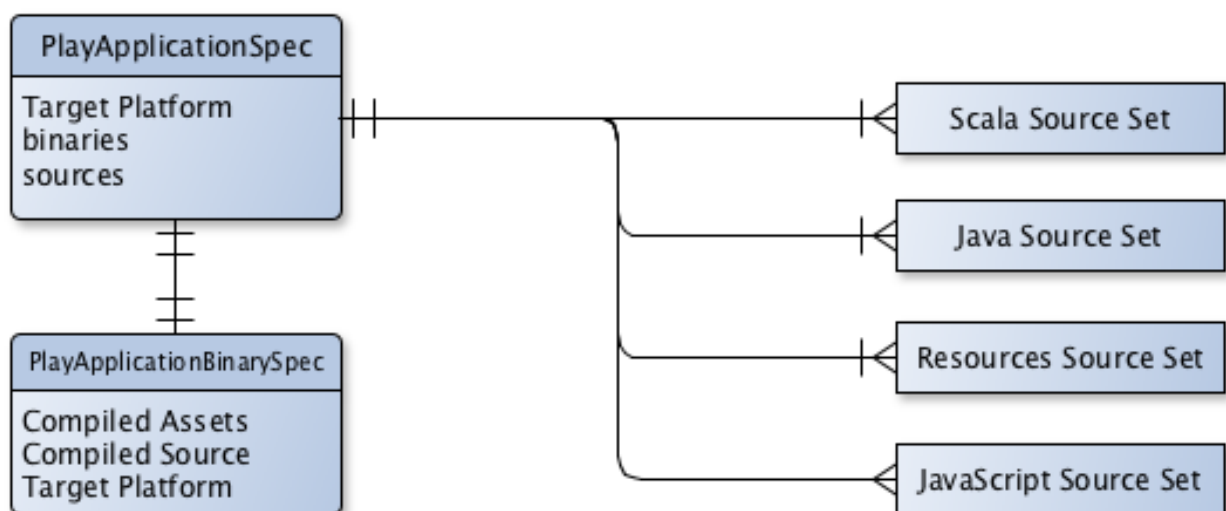

## §

### The Play application component

A Play application component describes the application to be built and consists of several configuration elements. One type of element that describes the application are the source sets that define where the application controller, route, template and model class source files should be found. These source sets are logical groupings of files of a particular type and a default source set for each type is created when the `play` plugin is applied.

**Table 83. Default Play source sets**

Source Set	Type	Directory	Filters
java	<a href="#">JavaSourceSet</a>	app	**/*.java
scala	<a href="#">ScalaLanguageSourceSet</a>	app	**/*.scala
routes	<a href="#">RoutesSourceSet</a>	conf	routes, *.routes
twirlTemplates	<a href="#">TwirlSourceSet</a>	app	**/*.scala.*
javascript	<a href="#">JavaScriptSourceSet</a>	app/assets	**/*.js

These source sets can be configured or additional source sets can be added to the Play component. See [Configuring Play](#) for further information.

Another element of configuring a Play application is the *platform*. To build a Play application, Gradle needs to understand which versions of Play, Scala and Java to use. The Play component specifies this requirement as a [PlayPlatform](#). If these values are not configured, a default version of Play, Scala and Java will be used. See [Targeting a certain version of Play](#) for information on configuring the Play platform.

Note that only a single platform can be specified for a given Play component. This means that only a single version of Play, Scala and Java can be used to build a Play component. In other words, a Play component can only produce one set of outputs, and those outputs will be built using the versions specified by the platform configured on the component.

## §

### The Play application binary

A Play application component is compiled and packaged to produce a set of outputs which are represented by a [PlayApplicationBinarySpec](#). The Play binary specifies the jar files produced by building the component as well as providing elements by which additional content can be added to those jar files. It also exposes the tasks involved in building the component and creating the binary.

See [Configuring Play](#) for examples of configuring the Play binary.



§

## Project Layout

The Play plugin follows the typical Play application layout. You can configure source sets to include additional directories or change the defaults.

<code>app</code>	Application source code.
<code>assets</code>	Assets that require compilation.
<code>javascripts</code>	JavaScript source code to be minified.
<code>controllers</code>	Application controller source code.
<code>models</code>	Application business source code.
<code>views</code>	Application UI templates.
<code>build.gradle</code>	Your project's build script.
<code>conf</code>	Main application configuration file and routes files.
<code>public</code>	Public assets.
<code>images</code>	Application image files.
<code>javascripts</code>	Typically JavaScript source code.
<code>stylesheets</code>	Typically CSS source code.
<code>test</code>	Test source code.

§

## Tasks

The Play plugin hooks into the normal Gradle lifecycle tasks such as `assemble`, `check` and `build`, but it also adds several additional tasks which form the lifecycle of a Play project:

**Table 84. Play plugin - lifecycle tasks**

Task name	Depends on	Type	Description
<code>playBinary</code>	All compile tasks for source sets added to the Play application.	<a href="#">Task</a>	Performs a build of just the Play application.
<code>dist</code>	<code>createPlayBinaryZipDist</code> , <code>createPlayBinaryTarDist</code>	<a href="#">Task</a>	Assembles the Play distribution.
<code>stage</code>	<code>stagePlayBinaryDist</code>	<a href="#">Task</a>	Stages the Play distribution.

The plugin also provides tasks for running, testing and packaging your Play application:

**Table 85. Play plugin - running and testing tasks**

task name	Depends on	Type	Description
<code>runPlayBinary</code>	<code>playBinary</code> to build Play application.	<a href="#">PlayRun</a>	Runs the Play application for local development. See how this works with continuous build.
<code>testPlayBinary</code>	<code>playBinary</code> to build Play application and <code>compilePlayBinaryTests</code> .	<a href="#">Test</a>	Runs JUnit/TestNG tests for the Play application.

For the different types of sources in a Play application, the plugin adds the following compilation tasks:

**Table 86. Play plugin - source set tasks**

task name	Source Type	Type	Description
<code>compilePlayBinaryScala</code>	Scala and Java	<a href="#">PlatformScalaCompile</a>	Compiles all Scala and Java sources defined by the Play application.
<code>compilePlayBinaryPlayTwirlTemplates</code>	Twirl templates	<a href="#">TwirlCompile</a>	Compiles Twirl templates with the Twirl compiler. Gradle supports all of the built-in Twirl template formats (HTML, XML, TXT and JavaScript). Twirl templates need to match the pattern <code>*.scala.html</code> .
<code>compilePlayBinaryPlayRoutes</code>	Play Route files	<a href="#">RoutesCompile</a>	Compiles routes files into Scala sources.
<code>minifyPlayBinaryJavaScript</code>	JavaScript files	<a href="#">JavaScriptMinify</a>	Minifies JavaScript files with the Google Closure compiler.

## §

### Finding out more about your project

Gradle provides a report that you can run from the command-line that shows some details about the components and binaries that your project produces. To use this report, just run `gradle components`. Below is an example of running this report for one of the sample projects:

## Example 588. The components report

### Output of `gradle components`

```
> gradle components

> Task :components

-----

Root project
-----

Play Application 'play'
-----

Source sets
    Java source 'play:java'
        srcDir: app
        includes: **/*.java
    JavaScript source 'play:javascript'
        srcDir: app/assets
        includes: **/*.js
    JVM resources 'play:resources'
        srcDir: conf
    Routes source 'play:routes'
        srcDir: conf
        includes: routes, *.routes
    Scala source 'play:scala'
        srcDir: app
        includes: **/*.scala
    Twirl template source 'play:twirlTemplates'
        srcDir: app
        includes: **/*.scala.*

Binaries
    Play Application Jar 'play:binary'
        build using task: :playBinary
        target platform: Play Platform (Play 2.6.15, Scala: 2.12, Java: Java SE 8)
        toolchain: Default Play Toolchain
        classes dir: build/playBinary/classes
        resources dir: build/playBinary/resources
        JAR file: build/playBinary/lib/basic.jar

Note: currently not all plugins register their components, so some components may be missing

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

## §

### Running a Play application

The `runPlayBinary` task starts the Play application under development. During development it is beneficial to execute this task as a continuous build. Continuous build is a generic feature that supports automatically re-running a build when inputs change. The `runPlayBinary` task is “continuous build aware” in that it behaves differently when run as part of a continuous build.

When not run as part of a continuous build, the `runPlayBinary` task will *block* the build. That is, the task will not complete as long as the application is running. When running as part of a continuous build, the task will start the application if not running and otherwise propagate any changes to the code of the application to the running instance. This is useful for quickly iterating on your Play application with an edit->rebuild->refresh cycle. Changes to your application will not take affect until the end of the overall build.

To enable continuous build, run Gradle with `-t runPlayBinary` or `--continuous runPlayBinary`.

Users of Play used to such a workflow with Play’s default build system should note that compile errors are handled differently. If a build failure occurs during a continuous build, the Play application will not be reloaded. Instead, you will be presented with an exception message. The exception message will only contain the overall cause of the build failure. More detailed information will only be available from the console.

§

## Configuring a Play application

§

### Targeting a certain version of Play

By default, Gradle uses Play 2.6.15, Scala 2.12 and the version of Java used to start the build. A Play application can select a different version by specifying a target `PlayApplicationSpec.platform(java.lang.Object)` on the Play application component.

#### Example 589. Selecting a version of the Play Framework

##### build.gradle

```
model {
    components {
        play {
            platform play: '2.6.15', scala: '2.12', java: '1.8'
            injectedRoutesGenerator = true
        }
    }
}
```

The following versions of Play and Scala are supported:

**Table 87. Play supported versions**

Play	Scala	Java
6.x	2.11 and 2.12	1.8
5.x	2.11	1.8
4.x	2.10 and 2.11	1.8
3.x	2.10 and 2.11	1.6, 1.7 and 1.8

§

### Adding dependencies

You can add compile, test and runtime dependencies to a Play application through `Configuration` created by the Play plugin.

If you are coming from SBT, the Play SBT plugin provides short names for common dependencies. For instance, if your project has a dependency on `ws`, you will need to add a dependency to `com.typesafe.play:play-ws-standalone-xml_2.11:2.3.9` where `2.11` is your Scala version and `2.3.9` is your Play framework version.

Other dependencies that have short names, such as `jackson`s may actually be multiple dependencies. For those dependencies, you will need to work out the dependency coordinates from a dependency report.

`play` is used for compile time dependencies.

`playTest` is used for test compile time dependencies.

`playRun` is used for run time dependencies.

#### Example 590. Adding dependencies to a Play application

**build.gradle**

```
dependencies {  
    play "commons-lang:commons-lang:2.6"  
    play "com.typesafe.play:play-guice_2.12:2.6.15"  
    play "ch.qos.logback:logback-classic:1.2.3"  
}
```

**Note:** Play 2.6 has a more modular architecture and, because of that, you may need to add some dependencies manually. For example, Guice support was moved to a separated module. Considering the following definition for a Play 2.6 project:

#### Example 591. A Play 2.6 project

**Note: build.gradle**

```
model {  
    components {  
        play {  
            platform play: '2.6.7', scala: '2.12', java: '1.8'  
            injectedRoutesGenerator = true  
        }  
    }  
}
```

You can add Guice dependency like:

#### Example 592. Adding Guice dependency in Play 2.6 project

**Note: build.gradle**

```
dependencies {  
    play "com.typesafe.play:play-guice_2.12:2.6.7"  
}
```

Of course, pay attention to keep Play version and Scala version for the dependency consistent with the platform versions.

§

## Configuring the default source sets

You can further configure the default source sets to do things like add new directories, add filters, etc.

### Example 593. Configuring extra source sets to a Play application

#### **build.gradle**

```
model {  
    components {  
        play {  
            sources {  
                java {  
                    source.srcDir "additional/java"  
                }  
                javascript {  
                    source {  
                        srcDir "additional/javascript"  
                        exclude "**/old_*.js"  
                    }  
                }  
            }  
        }  
    }  
}
```

§

## Adding extra source sets

If your Play application has additional sources that exist in non-standard directories, you can add extra source sets that Gradle will automatically add to the appropriate compile tasks.

### Example 594. Adding extra source sets to a Play application

#### build.gradle

```
model {
    components {
        play {
            sources {
                extraJava(JavaSourceSet) {
                    source.srcDir "extra/java"
                }
                extraTwirl(TwirlSourceSet) {
                    source.srcDir "extra/twirl"
                }
                extraRoutes(RoutesSourceSet) {
                    source.srcDir "extra/routes"
                }
            }
        }
    }
}
```

§

### Configuring compiler options

If your Play application requires additional Scala compiler flags, you can add these arguments directly to the Scala compiler task.

### Example 595. Configuring Scala compiler options

#### build.gradle

```
model {
    components {
        play {
            binaries.all {
                tasks.withType(PlatformScalaCompile) {
                    scalaCompileOptions.additionalParameters = ["-feature", "-language"]
                }
            }
        }
    }
}
```

§

### Configuring routes style

**Note:** The injected router is only supported in Play Framework 2.4 or better.



If your Play application's router uses dependency injection to access your controllers, you'll need to configure your application to *not* use the default static router. Under the covers, the Play plugin is using the `InjectRoutesGenerator` instead of the default `StaticRoutesGenerator` to generate the router classes.

#### Example 596. Configuring routes style

##### build.gradle

```
model {
    components {
        play {
            injectedRoutesGenerator = true
        }
    }
}
```

§

#### Configuring Twirl templates

A custom Twirl template format can be configured independently for each Twirl source set. See the [TwirlSourceSet](#) for an example.

§

#### Injecting a custom asset pipeline

Gradle Play support comes with a simplistic asset processing pipeline that minifies JavaScript assets. However, many organizations have their own custom pipeline for processing assets. You can easily hook the results of your pipeline into the Play binary by utilizing the [PublicAssets](#) property on the binary.

## Example 597. Configuring a custom asset pipeline

### build.gradle

```
model {
    components {
        play {
            binaries.all { binary ->
                tasks.create("addCopyrightToPlay${binary.name.capitalize()}Assets") {
                    source "raw-assets"
                    copyrightFile = project.file('copyright.txt')
                    destinationDir = project.file("${buildDir}/play${binary.name.capitalize()}")

                    // Hook this task into the binary
                    binary.assets.addAssetDir destinationDir
                    binary.assets.builtBy copyrightTask
                }
            }
        }
    }
}

class AddCopyrights extends SourceTask {
    @InputFile
    File copyrightFile

    @OutputDirectory
    File destinationDir

    @TaskAction
    void generateAssets() {
        String copyright = copyrightFile.text
        getSource().each { File file ->
            File outputFile = new File(destinationDir, file.name)
            outputFile.text = "${copyright}\n${file.text}"
        }
    }
}
```

## §

## Multi-project Play applications

Play applications can be built in multi-project builds as well. Simply apply the `play` plugin in the appropriate subprojects and create any project dependencies on the `play` configuration.

### Example 598. Configuring dependencies on Play subprojects

#### **build.gradle**

```
dependencies {  
    play project(":admin")  
    play project(":user")  
    play project(":util")  
}
```

See the `play/multiproject` sample provided in the Gradle distribution for a working example.

## §

### Packaging a Play application for distribution

Gradle provides the capability to package your Play application so that it can easily be distributed and run in a target environment. The distribution package (zip file) contains the Play binary jars, all dependencies, and generated scripts that set up the classpath and run the application in a Play-specific Netty container.

The distribution can be created by running the `dist` lifecycle task and places the distribution in the `$buildD` directory. Alternatively, one can validate the contents by running the `stage` lifecycle task which copies the files to the `$buildDir/stage` directory using the layout of the distribution package.

**Table 88. Play distribution tasks**

task name	Depends on	Type	Description
<code>createPlayBinaryStartScripts</code>	-	<a href="#">CreateStartScripts</a>	Generates scripts to run the Play application distribution.
<code>stagePlayBinaryDist</code>	<code>playBinary</code> , <code>createPlayBinaryStartScripts</code>	<a href="#">Copy</a>	Copies all jar files, dependencies and scripts into a staging directory.
<code>createPlayBinaryZipDist</code>		<a href="#">Zip</a>	Bundles the Play application as a standalone distribution packaged as a zip.
<code>createPlayBinaryTarDist</code>		<a href="#">Tar</a>	Bundles the Play application as a standalone distribution packaged as a tar.
<code>stage</code>	<code>stagePlayBinaryDist</code>	<a href="#">Task</a>	Lifecycle task for staging a Play distribution.
<code>dist</code>	<code>createPlayBinaryZipDist</code> , <code>createPlayBinaryTarDist</code>	<a href="#">Task</a>	Lifecycle task for creating a Play distribution.

## §

### Adding additional files to your Play application distribution

You can add additional files to the distribution package using the [Distribution](#) API.

### Example 599. Add extra files to a Play application distribution

#### build.gradle

```
model {
    distributions {
        playBinary {
            contents {
                from("README.md")
                from("scripts") {
                    into "bin"
                }
            }
        }
    }
}
```

## §

### Building a Play application with an IDE

If you want to generate IDE metadata configuration for your Play project, you need to apply the appropriate IDE plugin. Gradle supports generating IDE metadata for IDEA only for Play projects at this time.

To generate IDEA's metadata, apply the `idea` plugin along with the `play` plugin.

### Example 600. Applying both the Play and IDEA plugins

#### build.gradle

```
plugins {
    id 'play'
    id 'idea'
}
```

Source code generated by routes and Twirl templates cannot be generated by IDEA directly, so changes made to those files will not affect compilation until the next Gradle build. You can run the Play application with Gradle in continuous build to automatically rebuild and reload the application whenever something changes.

## §

### Resources

For additional information about developing Play applications:

Play types in the Gradle DSL Guide:

[PlayApplicationBinarySpec](#)

[PlayApplicationSpec](#)

[PlayPlatform](#)

[JvmClasses](#)

[PublicAssets](#)

[PlayDistributionContainer](#)

[JavaScriptMinify](#)

[PlayRun](#)

[RoutesCompile](#)

[TwirlCompile](#)

**Play Framework Documentation.**

# Building native software

**Note:** Support for building native software is currently incubating. Please be aware that the DSL, APIs and other configuration may change in later Gradle versions.

The native software plugins add support for building native software components, such as executables or shared libraries, from code written in C++, C and other languages. While many excellent build tools exist for this space of software development, Gradle offers developers its trademark power and flexibility together with dependency management practices more traditionally found in the JVM development space.

The native software plugins make use of the Gradle software model.

§

## Features

The native software plugins provide:

Support for building native libraries and applications on Windows, Linux, macOS and other platforms.

Support for several source languages.

Support for building different variants of the same software, for different architectures, operating systems, or for any purpose.

Incremental parallel compilation, precompiled headers.

Dependency management between native software components.

Unit test execution.

Generate Visual studio solution and project files.

Deep integration with various tool chain, including discovery of installed tool chains.

§

## Supported languages

The following source languages are currently supported:

C

C++

Objective-C

Objective-C++

Assembly

Windows resources

## §

### Tool chain support

Gradle offers the ability to execute the same build using different tool chains. When you build a native binary, Gradle will attempt to locate a tool chain installed on your machine that can build the binary. You can fine tune exactly how this works, see the section called “Tool chains” for details.

The following tool chains are supported:

Operating System	Tool Chain	Notes
Linux	GCC	
Linux	Clang	
macOS	XCode	Uses the Clang tool chain bundled with XCode.
Windows	Visual C++	Windows XP and later, Visual C++ 2010/2012/2013/2015/2017.
Windows	GCC with Cygwin 32	Windows XP and later.
Windows	GCC with MinGW	Windows XP and later. Mingw-w64 is currently not supported.

The following tool chains are unofficially supported. They generally work fine, but are not tested continuously:

Operating System	Tool Chain	Notes
macOS	GCC from Macports	
macOS	Clang from Macports	
Windows	GCC with Cygwin 64	Windows XP and later.



UNIX-like	GCC	
UNIX-like	Clang	

§

## Tool chain installation

**Note:** Note that if you are using GCC then you currently need to install support for C++, even if you are not building from C++ source. This restriction will be removed in a future Gradle version.

To build native software, you will need to have a compatible tool chain installed:

§

### Windows

To build on Windows, install a compatible version of Visual Studio. The native plugins will discover the Visual Studio installations and select the latest version. There is no need to mess around with environment variables or batch scripts. This works fine from a Cygwin shell or the Windows command-line.

Alternatively, you can install Cygwin with GCC or MinGW. Clang is currently not supported.

§

### macOS

To build on macOS, you should install XCode. The native plugins will discover the XCode installation using the system PATH.

The native plugins also work with GCC and Clang bundled with Macports. To use one of the Macports tool chains, you will need to make the tool chain the default using the `port select` command and add Macports to the system PATH.

§

### Linux

To build on Linux, install a compatible version of GCC or Clang. The native plugins will discover GCC or Clang using the system PATH.

§

## Native software model

The native software model builds on the base Gradle software model.

To build native software using Gradle, your project should define one or more *native components*. Each component represents either an executable or a library that Gradle should build. A project can define any number of components. Gradle does not define any components by default.

For each component, Gradle defines a *source set* for each language that the component can be built from. A source set is essentially just a set of source directories containing source files. For example, when you apply the `c` plugin and define a library called `helloworld`, Gradle will define, by default, a source set containing the C source files in the `src/helloworld/c` directory. It will use these source files to build the `h` library. This is described in more detail below.

For each component, Gradle defines one or more *binaries* as output. To build a binary, Gradle will take the source files defined for the component, compile them as appropriate for the source language, and link the result into a binary file. For an executable component, Gradle can produce executable binary files. For a library component, Gradle can produce both static and shared library binary files. For example, when you define a library called `helloworld` and build on Linux, Gradle will, by default, produce `libhelloworld.sc` and `libhelloworld.a` binaries.

In many cases, more than one binary can be produced for a component. These binaries may vary based on the tool chain used to build, the compiler/linker flags supplied, the dependencies provided, or additional source files provided. Each native binary produced for a component is referred to as a *variant*. Binary variants are discussed in detail below.

## §

### Parallel Compilation

Gradle uses the single build worker pool to concurrently compile and link native components, by default. No special configuration is required to enable concurrent building.

By default, the worker pool size is determined by the number of available processors on the build machine (as reported to the build JVM). To explicitly set the number of workers use the `--max-workers` command-line option or `org.gradle.workers.max` system property. There is generally no need to change this setting from its default.

The build worker pool is shared across all build tasks. This means that when using parallel project execution, the maximum number of concurrent individual compilation operations does not increase. For example, if the build machine has 4 processing cores and 10 projects are compiling in parallel, Gradle will only use 4 total workers, not 40.

## §

### Building a library

To build either a static or shared native library, you define a library component in the `components` container. The following sample defines a library called `hello`:

### Example 601. Defining a library component

**build.gradle**

```
model {
    components {
        hello(NativeLibrarySpec)
    }
}
```

A library component is represented using `NativeLibrarySpec`. Each library component can produce at least one shared library binary (`SharedLibraryBinarySpec`) and at least one static library binary (`StaticLibraryBinarySpec`).

§

## Building an executable

To build a native executable, you define an executable component in the `components` container. The following sample defines an executable called `main`:

### Example 602. Defining executable components

**build.gradle**

```
model {
    components {
        main(NativeExecutableSpec) {
            sources {
                c.lib library: "hello"
            }
        }
    }
}
```

An executable component is represented using `NativeExecutableSpec`. Each executable component can produce at least one executable binary (`NativeExecutableBinarySpec`).

For each component defined, Gradle adds a `FunctionalSourceSet` with the same name. Each of these functional source sets will contain a language-specific source set for each of the languages supported by the project.


## §

## Assembling or building dependents

Sometimes, you may need to *assemble* (compile and link) or *build* (compile, link and test) a component or binary and its *dependents* (things that depend upon the component or binary). The native software model provides tasks that enable this capability. First, the *dependent components* report gives insight about the relationships between each component. Second, the *build and assemble dependents* tasks allow you to assemble or build a component and its dependents in one step.

In the following example, the build file defines `OpenSSL` as a dependency of `libUtil` and `libUtil` as a dependency of `LinuxApp` and `WindowsApp`. Test suites are treated similarly. Dependents can be thought of as reverse dependencies.

**Figure 36. Dependent Components Example**

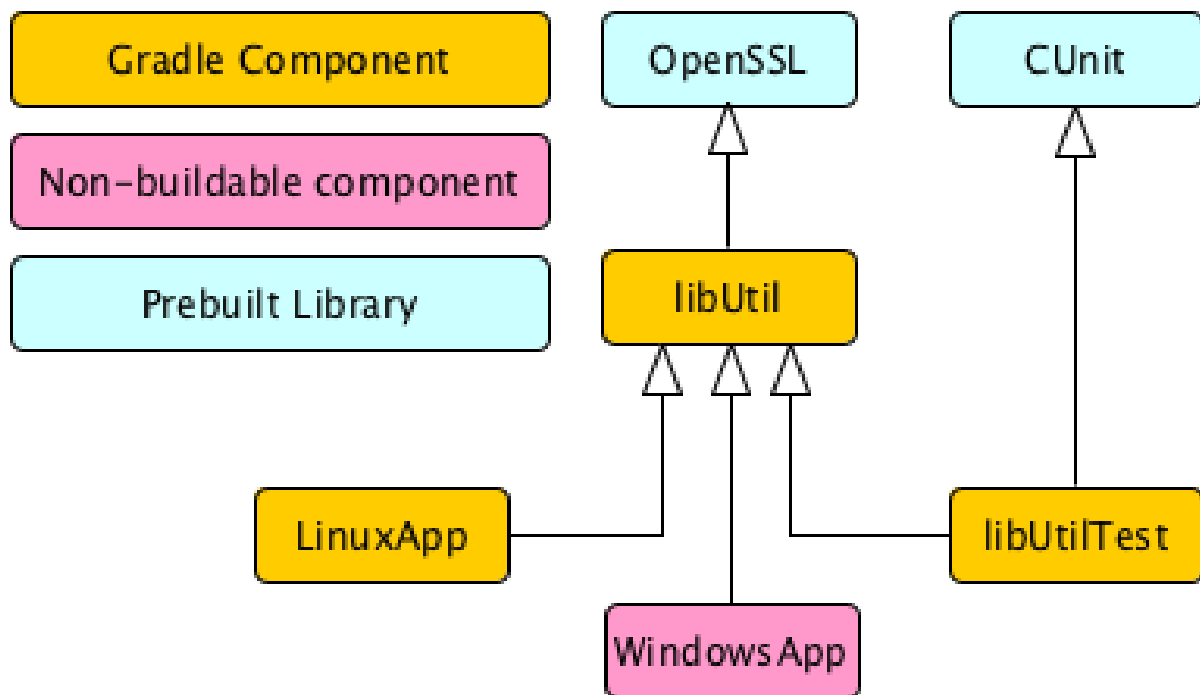

**Note:** By following the dependencies backwards, you can see `LinuxApp` and `WindowsApp` are *dependents* of `libUtil`. When `libUtil` is changed, Gradle will need to recompile or relink `LinuxApp` and `WindowsApp`.

When you *assemble* dependents of a component, the component and all of its dependents are compiled and linked, including any test suite binaries. Gradle's up-to-date checks are used to only compile or link if something has changed. For instance, if you have changed source files in a way that do not affect the headers of your project, Gradle will be able to skip compilation for dependent components and only need to re-link with the new library. Tests are not run when assembling a component.

When you *build* dependents of a component, the component and all of its dependent binaries are compiled,

linked *and checked*. Checking components means running any check task including executing any test suites, so tests *are* run when building a component.

In the following sections, we will demonstrate the usage of the `assembleDependents*`, `buildDependent` and `dependentComponents` tasks with a sample build that contains a CUnit test suite. The build script for the sample is the following:

### Example 603. Sample build

#### **build.gradle**

```
apply plugin: "c"
apply plugin: 'cunit-test-suite'

model {
    flavors {
        passing
        failing
    }
    platforms {
        x86 {
            architecture "x86"
        }
    }
    components {
        operators(NativeLibrarySpec) {
            targetPlatform "x86"
        }
    }
    testSuites {
        operatorsTest(CUnitTestSuiteSpec) {
            testing $.components.operators
        }
    }
}
```

**Note:** The code for this example can be found at `samples/native-binaries/cunit` in the ‘-all’ distribution of Gradle.

§

### Dependent components report

Gradle provides a report that you can run from the command-line that shows a graph of components in your project and components that depend upon them. The following is an example of running `gradle dependen` on the sample project:

## Example 604. Dependent components report

### Output of `gradle dependentComponents`

```
> gradle dependentComponents

> Task :dependentComponents

-----

Root project
-----

operators - Components that depend on native library 'operators'
+--- operators:failingSharedLibrary
+--- operators:failingStaticLibrary
+--- operators:passingSharedLibrary
\--- operators:passingStaticLibrary

Some test suites were not shown, use --test-suites or --all to show them.

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

**Note:** See [DependentComponentsReport](#) API documentation for more details.

By default, non-buildable binaries and test suites are hidden from the report. The `dependentComponents` task provides options that allow you to see all dependents by using the `--all` option:

## Example 605. Dependent components report

### Output of `gradle dependentComponents --all`

```
> gradle dependentComponents --all

> Task :dependentComponents

-----
Root project
-----

operators - Components that depend on native library 'operators'
+--- operators:failingSharedLibrary
+--- operators:failingStaticLibrary
|    \--- operatorsTest:failingCUnitExe (t)
+--- operators:passingSharedLibrary
\--- operators:passingStaticLibrary
     \--- operatorsTest:passingCUnitExe (t)

operatorsTest - Components that depend on Cunit test suite 'operatorsTest'
+--- operatorsTest:failingCUnitExe (t)
\--- operatorsTest:passingCUnitExe (t)

(t) - Test suite binary

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

Here is the corresponding report for the `operators` component, showing dependents of all its binaries:

### Example 606. Report of components that depends on the operators component

#### Output of `gradle dependentComponents --component operators`

```
> gradle dependentComponents --component operators

> Task :dependentComponents

-----
Root project
-----

operators - Components that depend on native library 'operators'
+--- operators:failingSharedLibrary
+--- operators:failingStaticLibrary
+--- operators:passingSharedLibrary
\--- operators:passingStaticLibrary

Some test suites were not shown, use --test-suites or --all to show them.

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

Here is the corresponding report for the `operators` component, showing dependents of all its binaries, including test suites:

### Example 607. Report of components that depends on the operators component, including test suites

#### Output of `gradle dependentComponents --test-suites --component operators`

```
> gradle dependentComponents --test-suites --component operators

> Task :dependentComponents

-----
Root project
-----

operators - Components that depend on native library 'operators'
+--- operators:failingSharedLibrary
+--- operators:failingStaticLibrary
|    \--- operatorsTest:failingCUnitExe (t)
+--- operators:passingSharedLibrary
\--- operators:passingStaticLibrary
     \--- operatorsTest:passingCUnitExe (t)

(t) - Test suite binary

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```



§

## Assembling dependents

For each `NativeBinarySpec`, Gradle will create a task named `assembleDependents${component.name}` that *assembles* (compile and link) the binary and all of its dependent binaries.

For each `NativeComponentSpec`, Gradle will create a task named `assembleDependents${component.name}` that *assembles* all the binaries of the component and all of their dependent binaries.

For example, to assemble the dependents of the "passing" flavor of the "static" library binary of the "operators" component, you would run the `assembleDependentsOperatorsPassingStaticLibrary` task:

**Example 608. Assemble components that depends on the passing/static binary of the operators comp**

Output of `gradle assembleDependentsOperatorsPassingStaticLibrary --max-workers=1`

```
> gradle assembleDependentsOperatorsPassingStaticLibrary --max-workers=1
> Task :compileOperatorsTestPassingCUnitExeOperatorsC
> Task :operatorsTestCUnitLauncher
> Task :compileOperatorsTestPassingCUnitExeOperatorsTestC
> Task :compileOperatorsTestPassingCUnitExeOperatorsTestCUnitLauncher
> Task :linkOperatorsTestPassingCUnitExe
> Task :operatorsTestPassingCUnitExe
> Task :assembleDependentsOperatorsTestPassingCUnitExe
> Task :compileOperatorsPassingStaticLibraryOperatorsC
> Task :createOperatorsPassingStaticLibrary
> Task :operatorsPassingStaticLibrary
> Task :assembleDependentsOperatorsPassingStaticLibrary
```

BUILD SUCCESSFUL in 0s

7 actionable tasks: 7 executed

In the output above, the targeted binary gets assembled as well as the test suite binary that depends on it.

You can also assemble *all* of the dependents of a component (i.e. of all its binaries/variants) using the corresponding component task, e.g. `assembleDependentsOperators`. This is useful if you have many combinations of build types, flavors and platforms and want to assemble all of them.

§

## Building dependents

For each `NativeBinarySpec`, Gradle will create a task named `buildDependents${component.name}` that *builds* (compile, link and check) the binary and all of its dependent binaries.

For each `NativeComponentSpec`, Gradle will create a task named `buildDependents${component.name}` that *builds* all the binaries of the component and all of their dependent binaries.

For example, to build the dependents of the "passing" flavor of the "static" library binary of the "operators"

component, you would run the `buildDependentsOperatorsPassingStaticLibrary` task:

**Example 609. Build components that depends on the passing/static binary of the operators component**

Output of `gradle buildDependentsOperatorsPassingStaticLibrary --max-workers=1`

```
> gradle buildDependentsOperatorsPassingStaticLibrary --max-workers=1
> Task :compileOperatorsTestPassingCUnitExeOperatorsC
> Task :operatorsTestCUnitLauncher
> Task :compileOperatorsTestPassingCUnitExeOperatorsTestC
> Task :compileOperatorsTestPassingCUnitExeOperatorsTestCunitLauncher
> Task :linkOperatorsTestPassingCUnitExe
> Task :operatorsTestPassingCUnitExe
> Task :installOperatorsTestPassingCUnitExe
> Task :runOperatorsTestPassingCUnitExe
> Task :checkOperatorsTestPassingCUnitExe
> Task :buildDependentsOperatorsTestPassingCUnitExe
> Task :compileOperatorsPassingStaticLibraryOperatorsC
> Task :createOperatorsPassingStaticLibrary
> Task :operatorsPassingStaticLibrary
> Task :buildDependentsOperatorsPassingStaticLibrary
```

BUILD SUCCESSFUL in 0s

9 actionable tasks: 9 executed

In the output above, the targeted binary as well as the test suite binary that depends on it are built and the test suite has run.

You can also build *all* of the dependents of a component (i.e. of all its binaries/variants) using the corresponding component task, e.g. `buildDependentsOperators`.

§

## Tasks

For each `NativeBinarySpec` that can be produced by a build, a single *lifecycle task* is constructed that can be used to create that binary, together with a set of other tasks that do the actual work of compiling, linking or assembling the binary.

Component Type	Native Binary Type	Lifecycle task	Location of created binary
<code>NativeExecutableSpec</code>	<code>NativeExecutableBinarySpec</code>	<code>\${component.name}Execu</code>	<code>\${project.buildDir}/ex</code>
<code>NativeLibrarySpec</code>	<code>SharedLibraryBinarySpec</code>	<code>\${component.name}Share</code>	<code>\${project.buildDir}/lib</code>
<code>NativeLibrarySpec</code>	<code>StaticLibraryBinarySpec</code>	<code>\${component.name}Stati</code>	<code>\${project.buildDir}/lib</code>

§

## Check tasks

For each `NativeBinarySpec` that can be produced by a build, a single *check task* is constructed that can be used to assemble and check that binary.

Component Type	Native Binary Type	Check task
<code>NativeExecutableSpec</code>	<code>NativeExecutableBinarySpec</code>	<code>check\${component.name}Executable</code>
<code>NativeLibrarySpec</code>	<code>SharedLibraryBinarySpec</code>	<code>check\${component.name}SharedLibr</code>
<code>NativeLibrarySpec</code>	<code>StaticLibraryBinarySpec</code>	<code>check\${component.name}StaticLibr</code>

The built-in *check* task depends on all the *check tasks* for binaries in the project. Without either CUnit or GoogleTest plugins, the binary check task only depends on the *lifecycle task* that assembles the binary, see the section called “Tasks”.

When the CUnit or GoogleTest plugins are applied, the task that executes the test suites for a component are automatically wired to the appropriate *check task*.

You can also add custom check tasks as follows:

### Example 610. Adding a custom check task

#### build.gradle

```
apply plugin: "cpp"
// You don't need to apply the plugin below if you're already using CUnit or GoogleTest
apply plugin: TestingModelBasePlugin

task myCustomCheck {
    doLast {
        println 'Executing my custom check'
    }
}

model {
    components {
        hello(NativeLibrarySpec) {
            binaries.all {
                // Register our custom check task to all binaries of this component
                checkedBy $.tasks.myCustomCheck
            }
        }
    }
}
```

**Note:** The code for this example can be found at `samples/native-binaries/custom-check` in the ‘-all’ distribution of Gradle.

Now, running `check` or any of the *check tasks* for the `hello` binaries will run the custom check task:

### Example 611. Running checks for a given binary

#### Output of `gradle checkHelloSharedLibrary`

```
> gradle checkHelloSharedLibrary

> Task :myCustomCheck
Executing my custom check

> Task :checkHelloSharedLibrary

BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

§

### Working with shared libraries

For each executable binary produced, the `cpp` plugin provides an `install${binary.name}` task, which creates a development install of the executable, along with the shared libraries it requires. This allows you to run the executable without needing to install the shared libraries in their final locations.

## §

### Finding out more about your project

Gradle provides a report that you can run from the command-line that shows some details about the components and binaries that your project produces. To use this report, just run `gradle components`. Below is an example of running this report for one of the sample projects:

#### Example 612. The components report

##### Output of `gradle components`

```
> gradle components

> Task :components

-----

Root project
-----

Native library 'hello'
-----

Source sets
    C++ source 'hello:cpp'
        srcDir: src/hello/cpp

Binaries
    Shared library 'hello:sharedLibrary'
        build using task: :helloSharedLibrary
        build type: build type 'debug'
        flavor: flavor 'default'
        target platform: platform 'current'
        tool chain: Tool chain 'clang' (Clang)
        shared library file: build/libs/hello/shared/libhello.dylib
    Static library 'hello:staticLibrary'
        build using task: :helloStaticLibrary
        build type: build type 'debug'
        flavor: flavor 'default'
        target platform: platform 'current'
        tool chain: Tool chain 'clang' (Clang)
        static library file: build/libs/hello/static/libhello.a

Native executable 'main'
-----

Source sets
    C++ source 'main:cpp'
        srcDir: src/main/cpp
```

## Binaries

```
Executable 'main:executable'
  build using task: :mainExecutable
  install using task: :installMainExecutable
  build type: build type 'debug'
  flavor: flavor 'default'
  target platform: platform 'current'
  tool chain: Tool chain 'clang' (Clang)
  executable file: build/exe/main/main
```

Note: currently not all plugins register their components, so some components may

```
BUILD SUCCESSFUL in 0s
1 actionable task: 1 executed
```

§

## Language support

Presently, Gradle supports building native software from any combination of source languages listed below. A native binary project will contain one or more named `FunctionalSourceSet` instances (eg 'main', 'test', etc), each of which can contain `LanguageSourceSets` containing source files, one for each language.

C

C++

Objective-C

Objective-C++

Assembly

Windows resources

§

### C++ sources

C++ language support is provided by means of the `'cpp'` plugin.

#### Example 613. The 'cpp' plugin

**build.gradle**

```
apply plugin: 'cpp'
```

C++ sources to be included in a native binary are provided via a `CppSourceSet`, which defines a set of C++ source files and optionally a set of exported header files (for a library). By default, for any named component the `CppSourceSet` contains `.cpp` source files in `src/${name}/cpp`, and header files in `src/${name}/h`.

While the `cpp` plugin defines these default locations for each `CppSourceSet`, it is possible to extend or override these defaults to allow for a different project layout.

### Example 614. C++ source set

#### build.gradle

```
sources {
    cpp {
        source {
            srcDir "src/source"
            include "**/*.cpp"
        }
    }
}
```

For a library named 'main', header files in `src/main/headers` are considered the "public" or "exported" headers. Header files that should not be exported should be placed inside the `src/main/cpp` directory (though be aware that such header files should always be referenced in a manner relative to the file including them).

§

### C sources

C language support is provided by means of the 'c' plugin.

### Example 615. The 'c' plugin

#### build.gradle

```
apply plugin: 'c'
```

C sources to be included in a native binary are provided via a `CSourceSet`, which defines a set of C source files and optionally a set of exported header files (for a library). By default, for any named component the `CSourceSet` contains `.c` source files in `src/${name}/c`, and header files in `src/${name}/headers`.

While the `c` plugin defines these default locations for each `CSourceSet`, it is possible to extend or override these defaults to allow for a different project layout.

### Example 616. C source set

#### build.gradle

```
sources {
    c {
        source {
            srcDir "src/source"
            include "**/*.c"
        }
        exportedHeaders {
            srcDir "src/include"
        }
    }
}
```



For a library named 'main', header files in `src/main/headers` are considered the "public" or "exported" headers. Header files that should not be exported should be placed inside the `src/main/c` directory (though be aware that such header files should always be referenced in a manner relative to the file including them).

§

## Assembler sources

Assembly language support is provided by means of the `'assembler'` plugin.

### Example 617. The 'assembler' plugin

**build.gradle**

```
apply plugin: 'assembler'
```

Assembler sources to be included in a native binary are provided via a `AssemblerSourceSet`, which defines a set of Assembler source files. By default, for any named component the `AssemblerSourceSet` contains `.s` source files under `src/${name}/asm`.

§

## Objective-C sources

Objective-C language support is provided by means of the `'objective-c'` plugin.

### Example 618. The 'objective-c' plugin

**build.gradle**

```
apply plugin: 'objective-c'
```

Objective-C sources to be included in a native binary are provided via a `ObjectiveCSourceSet`, which defines a set of Objective-C source files. By default, for any named component the `ObjectiveCSourceSet` contains `.m` source files under `src/${name}/objectiveC`.

§

## Objective-C++ sources

Objective-C++ language support is provided by means of the `'objective-cpp'` plugin.

### Example 619. The 'objective-cpp' plugin

**build.gradle**

```
apply plugin: 'objective-cpp'
```

Objective-C++ sources to be included in a native binary are provided via a `ObjectiveCppSourceSet`, which defines a set of Objective-C++ source files. By default, for any named component the `ObjectiveCppSourceSet` contains `.mm` source files under `src/${name}/objectiveCpp`.

## §

### Configuring the compiler, assembler and linker

Each binary to be produced is associated with a set of compiler and linker settings, which include command-line arguments as well as macro definitions. These settings can be applied to all binaries, an individual binary, or selectively to a group of binaries based on some criteria.

#### Example 620. Settings that apply to all binaries

##### build.gradle

```
model {  
    binaries {  
        all {  
            // Define a preprocessor macro for every binary  
            cppCompiler.define "NDEBUG"  
  
            // Define toolchain-specific compiler and linker options  
            if (toolChain in Gcc) {  
                cppCompiler.args "-O2", "-fno-access-control"  
                linker.args "-Xlinker", "-S"  
            }  
            if (toolChain in VisualCpp) {  
                cppCompiler.args "/Zi"  
                linker.args "/DEBUG"  
            }  
        }  
    }  
}
```

Each binary is associated with a particular `NativeToolChain`, allowing settings to be targeted based on this value.

It is easy to apply settings to all binaries of a particular type:

### Example 621. Settings that apply to all shared libraries

#### build.gradle

```
// For any shared library binaries built with Visual C++,
// define the DLL_EXPORT macro
model {
    binaries {
        withType(SharedLibraryBinarySpec) {
            if (toolChain in VisualCpp) {
                cCompiler.args "/Zi"
                cCompiler.define "DLL_EXPORT"
            }
        }
    }
}
```

Furthermore, it is possible to specify settings that apply to all binaries produced for a particular executable or library component:

### Example 622. Settings that apply to all binaries produced for the 'main' executable component

#### build.gradle

```
model {
    components {
        main(NativeExecutableSpec) {
            targetPlatform "x86"
            binaries.all {
                if (toolChain in VisualCpp) {
                    sources {
                        platformAsm(AssemblerSourceSet) {
                            source.srcDir "src/main/asm_i386_masm"
                        }
                    }
                    assembler.args "/Zi"
                } else {
                    sources {
                        platformAsm(AssemblerSourceSet) {
                            source.srcDir "src/main/asm_i386_gcc"
                        }
                    }
                    assembler.args "-g"
                }
            }
        }
    }
}
```

The example above will apply the supplied configuration to all executable binaries built.

Similarly, settings can be specified to target binaries for a component that are of a particular type: eg all shared libraries for the main library component.

#### Example 623. Settings that apply only to shared libraries produced for the 'main' library component

##### build.gradle

```
model {
    components {
        main(NativeLibrarySpec) {
            binaries.withType(SharedLibraryBinarySpec) {
                // Define a preprocessor macro that only applies to shared libraries
                cppCompiler.define "DLL_EXPORT"
            }
        }
    }
}
```

§

## Windows Resources

When using the [VisualCpp](#) tool chain, Gradle is able to compile Window Resource (rc) files and link them into a native binary. This functionality is provided by the 'windows-resources' plugin.

#### Example 624. The 'windows-resources' plugin

##### build.gradle

```
apply plugin: 'windows-resources'
```

Windows resources to be included in a native binary are provided via a [WindowsResourceSet](#), which defines a set of Windows Resource source files. By default, for any named component the [WindowsResourceSet](#) contains .rc source files under `src/${name}/rc`.

As with other source types, you can configure the location of the windows resources that should be included in the binary.

#### Example 625. Configuring the location of Windows resource sources

##### build-resource-only-dll.gradle

```
sources {
    rc {
        source {
            srcDirs "src/hello/rc"
        }
        exportedHeaders {
            srcDirs "src/hello/headers"
        }
    }
}
```

You are able to construct a resource-only library by providing Windows Resource sources with no other language sources, and configure the linker as appropriate:

#### Example 626. Building a resource-only dll

##### **build-resource-only-dll.gradle**

```
model {
    components {
        helloRes(NativeLibrarySpec) {
            binaries.all {
                rcCompiler.args "/v"
                linker.args "/noentry", "/machine:x86"
            }
            sources {
                rc {
                    source {
                        srcDirs "src/hello/rc"
                    }
                    exportedHeaders {
                        srcDirs "src/hello/headers"
                    }
                }
            }
        }
    }
}
```

The example above also demonstrates the mechanism of passing extra command-line arguments to the resource compiler. The `rcCompiler` extension is of type [PreprocessingTool](#).

§

## Library Dependencies

Dependencies for native components are binary libraries that export header files. The header files are used during compilation, with the compiled binary dependency being used during linking and execution. Header files should be organized into subdirectories to prevent clashes of commonly named headers. For instance, if your `mylib` project has a `logging.h` header, it will make it less likely the wrong header is used if you include it as `"mylib/logging.h"` instead of `"logging.h"`.

§

### Dependencies within the same project

A set of sources may depend on header files provided by another binary component within the same project. A common example is a native executable component that uses functions provided by a separate native library component.

Such a library dependency can be added to a source set associated with the `executable` component:

#### Example 627. Providing a library dependency to the source set

##### **build.gradle**

```
sources {
    cpp {
        lib library: "hello"
    }
}
```

Alternatively, a library dependency can be provided directly to the `NativeExecutableBinarySpec` for the `executable`.

#### Example 628. Providing a library dependency to the binary

##### **build.gradle**

```
model {
    components {
        hello(NativeLibrarySpec) {
            sources {
                c {
                    source {
                        srcDir "src/source"
                        include "**/*.c"
                    }
                    exportedHeaders {
                        srcDir "src/include"
                    }
                }
            }
        }
    }
    main(NativeExecutableSpec) {
        sources {
            cpp {
                source {
                    srcDir "src/source"
                    include "**/*.cpp"
                }
            }
        }
        binaries.all {
            // Each executable binary produced uses the 'hello' static library
            lib library: 'hello', linkage: 'static'
        }
    }
}
```

§

## Project Dependencies

For a component produced in a different Gradle project, the notation is similar.

### Example 629. Declaring project dependencies

#### build.gradle

```
project(":lib") {
    apply plugin: "cpp"
    model {
        components {
            main(NativeLibrarySpec)
        }

        // For any shared library binaries built with Visual C++,
        // define the DLL_EXPORT macro
        binaries {
            withType(SharedLibraryBinarySpec) {
                if (toolChain in VisualCpp) {
                    cppCompiler.define "DLL_EXPORT"
                }
            }
        }
    }
}

project(":exe") {
    apply plugin: "cpp"

    model {
        components {
            main(NativeExecutableSpec) {
                sources {
                    cpp {
                        lib project: ':lib', library: 'main'
                    }
                }
            }
        }
    }
}
```

## §

# Precompiled Headers

Precompiled headers are a performance optimization that reduces the cost of compiling widely used headers multiple times. This feature *precompiles* a header such that the compiled object file can be reused when compiling each source file rather than recompiling the header each time. This support is available for C, C++, Objective-C, and Objective-C++ builds.

To configure a precompiled header, first a header file needs to be defined that includes all of the headers that should be precompiled. It must be specified as the first included header in every source file where the precompiled header should be used. It is assumed that this header file, and any headers it contains, make use of header guards so that they can be included in an idempotent manner. If header guards are not used in a header file, it is possible the header could be compiled more than once and could potentially lead to a broken build.

### Example 630. Creating a precompiled header file

```
src/hello/headers/pch.h
#ifndef PCH_H
#define PCH_H
#include <iostream>
#include "hello.h"
#endif
```

### Example 631. Including a precompiled header file in a source file

```
src/hello/cpp/hello.cpp
#include "pch.h"

void LIB_FUNC Greeter::hello () {
    std::cout << "Hello world!" << std::endl;
}
```

Precompiled headers are specified on a source set. Only one precompiled header file can be specified on a given source set and will be applied to all source files that declare it as the first include. If a source file does not include this header file as the first header, the file will be compiled in the normal manner (without making use of the precompiled header object file). The string provided should be the same as that which is used in the "#include" directive in the source files.



### Example 632. Configuring a precompiled header

#### build.gradle

```
model {
    components {
        hello(NativeLibrarySpec) {
            sources {
                cpp {
                    preCompiledHeader "pch.h"
                }
            }
        }
    }
}
```

A precompiled header must be included in the same way for all files that use it. Usually, this means the header file should exist in the source set "headers" directory or in a directory included on the compiler include path.

## §

### Native Binary Variants

For each executable or library defined, Gradle is able to build a number of different native binary variants. Examples of different variants include debug vs release binaries, 32-bit vs 64-bit binaries, and binaries produced with different custom preprocessor flags.

Binaries produced by Gradle can be differentiated on build type, platform, and flavor. For each of these 'variant dimensions', it is possible to specify a set of available values as well as target each component at one, some or all of these. For example, a plugin may define a range of support platforms, but you may choose to only target Windows-x86 for a particular component.

## §

### Build types

A `build type` determines various non-functional aspects of a binary, such as whether debug information is included, or what optimisation level the binary is compiled with. Typical build types are 'debug' and 'release', but a project is free to define any set of build types.

### Example 633. Defining build types

#### build.gradle

```
model {
    buildTypes {
        debug
        release
    }
}
```

If no build types are defined in a project, then a single, default build type called 'debug' is added.

For a build type, a Gradle project will typically define a set of compiler/linker flags per tool chain.

#### Example 634. Configuring debug binaries

##### build.gradle

```
model {
    binaries {
        all {
            if (toolChain in Gcc && buildType == buildTypes.debug) {
                cppCompiler.args "-g"
            }
            if (toolChain in VisualCpp && buildType == buildTypes.debug) {
                cppCompiler.args '/Zi'
                cppCompiler.define 'DEBUG'
                linker.args '/DEBUG'
            }
        }
    }
}
```

**Note:** At this stage, it is completely up to the build script to configure the relevant compiler/linker flags for each build type. Future versions of Gradle will automatically include the appropriate debug flags for any 'debug' build type, and may be aware of various levels of optimisation as well.

## §

### Platform

An executable or library can be built to run on different operating systems and cpu architectures, with a variant being produced for each platform. Gradle defines each OS/architecture combination as a [NativePlatform](#), and a project may define any number of platforms. If no platforms are defined in a project, then a single, default platform 'current' is added.

**Note:** Presently, a `Platform` consists of a defined operating system and architecture. As we continue to develop the native binary support in Gradle, the concept of Platform will be extended to include things like C-runtime version, Windows SDK, ABI, etc. Sophisticated builds may use the extensibility of Gradle to apply additional attributes to each platform, which can then be queried to specify particular includes, preprocessor macros or compiler arguments for a native binary.

### Example 635. Defining platforms

#### build.gradle

```
model {  
    platforms {  
        x86 {  
            architecture "x86"  
        }  
        x64 {  
            architecture "x86_64"  
        }  
        itanium {  
            architecture "ia-64"  
        }  
    }  
}
```

For a given variant, Gradle will attempt to find a [NativeToolChain](#) that is able to build for the target platform. Available tool chains are searched in the order defined. See the tool chains section below for more details.

§

#### Flavor

Each component can have a set of named `flavors`, and a separate binary variant can be produced for each flavor. While the `build type` and `target platform` variant dimensions have a defined meaning in Gradle, each project is free to define any number of flavors and apply meaning to them in any way.

An example of component flavors might differentiate between 'demo', 'paid' and 'enterprise' editions of the component, where the same set of sources is used to produce binaries with different functions.

### Example 636. Defining flavors

#### build.gradle

```
model {  
    flavors {  
        english  
        french  
    }  
    components {  
        hello(NativeLibrarySpec) {  
            binaries.all {  
                if (flavor == flavors.french) {  
                    cppCompiler.define "FRENCH"  
                }  
            }  
        }  
    }  
}
```

In the example above, a library is defined with a 'english' and 'french' flavor. When compiling the 'french' variant, a separate macro is defined which leads to a different binary being produced.

If no flavor is defined for a component, then a single default flavor named 'default' is used.

§

## Selecting the build types, platforms and flavors for a component

For a default component, Gradle will attempt to create a native binary variant for each and every combination of `buildType` and `flavor` defined for the project. It is possible to override this on a per-component basis, by specifying the set of `targetBuildTypes` and/or `targetFlavors`. By default, Gradle will build for the default platform, see above, unless specified explicitly on a per-component basis by specifying a set of `targetPlatforms`.

### Example 637. Targeting a component at particular platforms

#### **build.gradle**

```
model {
    components {
        hello(NativeLibrarySpec) {
            targetPlatform "x86"
            targetPlatform "x64"
        }
        main(NativeExecutableSpec) {
            targetPlatform "x86"
            targetPlatform "x64"
            sources {
                cpp.lib library: 'hello', linkage: 'static'
            }
        }
    }
}
```

Here you can see that the `TargetedNativeComponent.targetPlatform(java.lang.String)` method is used to specify a platform that the `NativeExecutableSpec` named `main` should be built for.

A similar mechanism exists for selecting `TargetedNativeComponent.targetBuildTypes(java.lang.String[])` and `TargetedNativeComponent.targetFlavors(java.lang.String[])`.

§

## Building all possible variants

When a set of build types, target platforms, and flavors is defined for a component, a `NativeBinarySpec` model element is created for every possible combination of these. However, in many cases it is not possible to build a particular variant, perhaps because no tool chain is available to build for a particular platform.

If a binary variant cannot be built for any reason, then the `NativeBinarySpec` associated with that variant will not be `buildable`. It is possible to use this property to create a task to generate all possible variants on a particular machine.

#### Example 638. Building all possible variants

##### `build.gradle`

```
model {  
    tasks {  
        buildAllExecutables(Task) {  
            dependsOn $.binaries.findAll { it.buildable }  
        }  
    }  
}
```

§

## Tool chains

A single build may utilize different tool chains to build variants for different platforms. To this end, the core 'native-binary' plugins will attempt to locate and make available supported tool chains. However, the set of tool chains for a project may also be explicitly defined, allowing additional cross-compilers to be configured as well as allowing the install directories to be specified.

§

### Defining tool chains

The supported tool chain types are:

`Gcc`

`Clang`

`VisualCpp`

## Example 639. Defining tool chains

### build.gradle

```
model {
    toolChains {
        visualCpp(VisualCpp) {
            // Specify the installDir if Visual Studio cannot be located
            // installDir "C:/Apps/Microsoft Visual Studio 10.0"
        }
        gcc(Gcc) {
            // Uncomment to use a GCC install that is not in the PATH
            // path "/usr/bin/gcc"
        }
        clang(Clang)
    }
}
```

Each tool chain implementation allows for a certain degree of configuration (see the API documentation for more details).

§

### Using tool chains

It is not necessary or possible to specify the tool chain that should be used to build. For a given variant, Gradle will attempt to locate a [NativeToolChain](#) that is able to build for the target platform. Available tool chains are searched in the order defined.

**Note:** When a platform does not define an architecture or operating system, the default target of the tool chain is assumed. So if a platform does not define a value for `operatingSystem`, Gradle will find the first available tool chain that can build for the specified `architecture`.

The core Gradle tool chains are able to target the following architectures out of the box. In each case, the tool chain will target the current operating system. See the next section for information on cross-compiling for other operating systems.

Tool Chain	Architectures
GCC	x86, x86_64
Clang	x86, x86_64
Visual C++	x86, x86_64, ia-64

So for GCC running on linux, the supported target platforms are 'linux/x86' and 'linux/x86\_64'. For GCC running on Windows via Cygwin, platforms 'windows/x86' and 'windows/x86\_64' are supported. (The Cygwin POSIX runtime is not yet modelled as part of the platform, but will be in the future.)

If no target platforms are defined for a project, then all binaries are built to target a default platform named 'current'. This default platform does not specify any `architecture` or `operatingSystem` value, hence using the default values of the first available tool chain.

Gradle provides a *hook* that allows the build author to control the exact set of arguments passed to a tool chain executable. This enables the build author to work around any limitations in Gradle, or assumptions that Gradle makes. The arguments hook should be seen as a 'last-resort' mechanism, with preference given to truly modelling the underlying domain.

#### Example 640. Reconfigure tool arguments

##### **build.gradle**

```
model {
    toolChains {
        visualCpp(VisualCpp) {
            eachPlatform {
                cppCompiler.withArguments { args ->
                    args << "-DFRENCH"
                }
            }
        }
        clang(Clang) {
            eachPlatform {
                cCompiler.withArguments { args ->
                    Collections.replaceAll(args, "CUSTOM", "-DFRENCH")
                }
                linker.withArguments { args ->
                    args.remove "CUSTOM"
                }
                staticLibArchiver.withArguments { args ->
                    args.remove "CUSTOM"
                }
            }
        }
    }
}
```

§

### Cross-compiling with GCC

Cross-compiling is possible with the `Gcc` and `Clang` tool chains, by adding support for additional target platforms. This is done by specifying a target platform for a toolchain. For each target platform a custom configuration can be specified.

## Example 641. Defining target platforms

### build.gradle

```
model {
    toolChains {
        gcc(Gcc) {
            target("arm"){
                cppCompiler.withArguments { args ->
                    args << "-m32"
                }
                linker.withArguments { args ->
                    args << "-m32"
                }
            }
            target("sparc")
        }
    }
    platforms {
        arm {
            architecture "arm"
        }
        sparc {
            architecture "sparc"
        }
    }
    components {
        main(NativeExecutableSpec) {
            targetPlatform "arm"
            targetPlatform "sparc"
        }
    }
}
```

## §

### Visual Studio IDE integration

Gradle has the ability to generate Visual Studio project and solution files for the native components defined in your build. This ability is added by the `visual-studio` plugin. For a multi-project build, all projects with native components (and the root project) should have this plugin applied.

When the `visual-studio` plugin is applied to the root project, a task named `visualStudio` is created, which will generate a Visual Studio solution file containing all components in the build. This solution will include a Visual Studio project for each component, as well as configuring each component to build using Gradle.

A task named `openVisualStudio` is also created by the `visual-studio` plugin when the project is the



root project. This task generates the Visual Studio solution and then opens the solution in Visual Studio. This means you can simply run `gradlew openVisualStudio` from the root project to generate and open the Visual Studio solution in one convenient step.

The content of the generated visual studio files can be modified via API hooks, provided by the `visualStudio` extension. Take a look at the 'visual-studio' sample, or see `VisualStudioExtension.getProjects()` and `VisualStudioRootExtension.getSolution()` in the API documentation for more details.

§

## CUnit support

The Gradle `cunit` plugin provides support for compiling and executing CUnit tests in your native-binary project. For each `NativeExecutableSpec` and `NativeLibrarySpec` defined in your project, Gradle will create a matching `CUnitTestSuiteSpec` component, named `${component.name}Test`.

§

### CUnit sources

Gradle will create a `CSourceSet` named 'cunit' for each `CUnitTestSuiteSpec` component in the project. This source set should contain the cunit test files for the component under test. Source files can be located in the conventional location (`src/${component.name}Test/cunit`) or can be configured like any other source set.

Gradle initialises the CUnit test registry and executes the tests, utilising some generated CUnit launcher sources. Gradle will expect and call a function with the signature `void gradle_cunit_register()` that you can use to configure the actual CUnit suites and tests to execute.

### Example 642. Registering CUnit tests

```
suite_operators.c
#include <CUnit/Basic.h>
#include "gradle_cunit_register.h"
#include "test_operators.h"

int suite_init(void) {
    return 0;
}

int suite_clean(void) {
    return 0;
}

void gradle_cunit_register() {
    CU_pSuite pSuiteMath = CU_add_suite("operator tests", suite_init, suite_clean);
    CU_add_test(pSuiteMath, "test_plus", test_plus);
    CU_add_test(pSuiteMath, "test_minus", test_minus);
}
```

**Note:** Due to this mechanism, your CUnit sources may not contain a `main` method since this will clash with the method provided by Gradle.

§

## Building CUnit executables

A `CUnitTestSuiteSpec` component has an associated `NativeExecutableSpec` or `NativeLibrarySpec` component. For each `NativeBinarySpec` configured for the main component, a matching `CUnitTestSuiteBinarySpec` will be configured on the test suite component. These test suite binaries can be configured in a similar way to any other binary instance:

### Example 643. Configuring CUnit tests

**build.gradle**

```
model {
    binaries {
        withType(CUnitTestSuiteBinarySpec) {
            lib library: "cunit", linkage: "static"

            if (flavor == flavors.failing) {
                cCompiler.define "PLUS_BROKEN"
            }
        }
    }
}
```

**Note:** Both the CUnit sources provided by your project and the generated launcher require the core CUnit headers and libraries. Presently, this library dependency must be provided by your project for each `CUnitTestSuiteBinarySpec`.

§

## Running CUnit tests

For each `CUnitTestSuiteBinarySpec`, Gradle will create a task to execute this binary, which will run all of the registered CUnit tests. Test results will be found in the `${build.dir}/test-results` directory.

### Example 644. Running CUnit tests

**build.gradle**

```

apply plugin: "c"
apply plugin: 'cunit-test-suite'

model {
    flavors {
        passing
        failing
    }
    platforms {
        x86 {
            architecture "x86"
        }
    }
    repositories {
        libs(PrebuiltLibraries) {
            cunit {
                headers.srcDir "libs/cunit/2.1-2/include"
                binaries.withType(StaticLibraryBinary) {
                    staticLibraryFile =
                        file("libs/cunit/2.1-2/lib/" +
                            findCUnitLibForPlatform(targetPlatform))
                }
            }
        }
    }
    components {
        operators(NativeLibrarySpec) {
            targetPlatform "x86"
        }
    }
    testSuites {
        operatorsTest(CUnitTestSuiteSpec) {
            testing $.components.operators
        }
    }
}

model {
    binaries {
        withType(CUnitTestSuiteBinarySpec) {
            lib library: "cunit", linkage: "static"

            if (flavor == flavors.failing) {
                cCompiler.define "PLUS_BROKEN"
            }
        }
    }
}

```

**Note:** The code for this example can be found at `samples/native-binaries/cunit` in the ‘-all’ distribution of Gradle.

#### Output of `gradle -q runOperatorsTestFailingCUnitExe`

```
> gradle -q runOperatorsTestFailingCUnitExe

There were test failures:
  1. /home/user/gradle/samples/native-binaries/cunit/src/operatorsTest/c/test_pl
  2. /home/user/gradle/samples/native-binaries/cunit/src/operatorsTest/c/test_pl

FAILURE: Build failed with an exception.

* What went wrong:
Execution failed for task ':runOperatorsTestFailingCUnitExe'.
> There were failing tests. See the results at: file:///home/user/gradle/samples

* Try:
Run with --stacktrace option to get the stack trace. Run with --info or --debug o

* Get more help at https://help.gradle.org

BUILD FAILED in 0s
```

**Note:** The current support for CUnit is quite rudimentary. Plans for future integration include:

- **Note:** Allow tests to be declared with Javadoc-style annotations.
- **Note:** Improved HTML reporting, similar to that available for JUnit.
- **Note:** Real-time feedback for test execution.
- **Note:** Support for additional test frameworks.

## §

### GoogleTest support

The Gradle `google-test` plugin provides support for compiling and executing GoogleTest tests in your native-binary project. For each `NativeExecutableSpec` and `NativeLibrarySpec` defined in your project, Gradle will create a matching `GoogleTestTestSuiteSpec` component, named ``${component.name}`

§

## GoogleTest sources

Gradle will create a `CppSourceSet` named 'cpp' for each `GoogleTestTestSuiteSpec` component in the project. This source set should contain the GoogleTest test files for the component under test. Source files can be located in the conventional location (`src/${component.name}Test/cpp`) or can be configured like any other source set.

§

## Building GoogleTest executables

A `GoogleTestTestSuiteSpec` component has an associated `NativeExecutableSpec` or `NativeLibrarySpec` component. For each `NativeBinarySpec` configured for the main component, a matching `GoogleTestTestSuiteBinarySpec` will be configured on the test suite component. These test suite binaries can be configured in a similar way to any other binary instance:

### Example 645. Registering GoogleTest tests

#### `build.gradle`

```
model {
    binaries {
        withType(GoogleTestTestSuiteBinarySpec) {
            lib library: "googleTest", linkage: "static"

            if (flavor == flavors.failing) {
                cppCompiler.define "PLUS_BROKEN"
            }

            if (targetPlatform.operatingSystem.linux) {
                cppCompiler.args '-pthread'
                linker.args '-pthread'

                if (toolChain instanceof Gcc || toolChain instanceof Clang) {
                    // Use C++03 with the old ABIs, as this is what the googletest
                    cppCompiler.args '-std=c++03', '-D_GLIBCXX_USE_CXX11_ABI=0'
                    linker.args '-std=c++03'
                }
            }
        }
    }
}
```

**Note:** The code for this example can be found at `samples/native-binaries/google-test` in the 'all' distribution of Gradle.

**Note:** The GoogleTest sources provided by your project require the core GoogleTest headers and libraries. Presently, this library dependency must be provided by your project for each

`GoogleTestTestSuiteBinarySpec`.

§

## Running GoogleTest tests

For each `GoogleTestTestSuiteBinarySpec`, Gradle will create a task to execute this binary, which will run all of the registered GoogleTest tests. Test results will be found in the `${build.dir}/test-results` directory.

**Note:** The current support for GoogleTest is quite rudimentary. Plans for future integration include:

- **Note:** Improved HTML reporting, similar to that available for JUnit.
- **Note:** Real-time feedback for test execution.
- **Note:** Support for additional test frameworks.

# Extending the software model

**Note:** Support for the software model is currently incubating. Please be aware that the DSL, APIs and other configuration may change in later Gradle versions.

One of the strengths of Gradle has always been its extensibility, and its adaptability to new domains. The software model takes this extensibility to a new level, enabling the deep modeling of specific domains via richly typed DSLs. The following chapter describes how the model and the corresponding DSLs can be extended to support domains like the Play Framework or native software development. Before reading this you should be familiar with the Gradle software model rule based configuration and concepts.

The following build script is an example of using a custom software model for building Markdown based documentation:

## Example 646. an example of using a custom software model

### build.gradle

```
import sample.documentation.DocumentationComponent
import sample.documentation.TextSourceSet
import sample.markdown.MarkdownSourceSet

apply plugin:sample.documentation.DocumentationPlugin
apply plugin:sample.markdown.MarkdownPlugin

model {
    components {
        docs(DocumentationComponent) {
            sources {
                reference(TextSourceSet)
                userguide(MarkdownSourceSet) {
                    generateIndex = true
                    smartQuotes = true
                }
            }
        }
    }
}
```

**Note:** The code for this example can be found at `samples/customModel/languageType/` in the ‘-all’ distribution of Gradle.

The rest of this chapter is dedicated to explaining what is going on behind this build script.

§

## Concepts

A custom software model type has a public type, a base interface and internal views. Multiple such types then collaborate to define a custom software model.

§

### Public type and base interfaces

Extended types declare a *public type* that extends a *base interface*:

Components extend the `ComponentSpec` base interface

Binaries extend the `BinarySpec` base interface

Source sets extend the `LanguageSourceSet` base interface

The *public type* is exposed to build logic.

§

### Internal views

Adding internal views to your model type, you can make some data visible to build logic via a public type, while hiding the rest of the data behind the internal view types. This is covered in a dedicated section below.

§

### Components all the way down

Components are composed of other components. A source set is just a special kind of component representing sources. It might be that the sources are provided, or generated. Similarly, some components are composed of different binaries, which are built by tasks. All buildable components are built by tasks. In the software model, you will write rules to generate both binaries from components and tasks from binaries.

§

## Components

To declare a custom component type one must extend `ComponentSpec`, or one of the following, depending on the use case:

`SourceComponentSpec` represents a component which has sources

`VariantComponentSpec` represents a component which generates different binaries based on context (target platforms, build flavors, ...). Such a component generally produces multiple binaries.

`GeneralComponentSpec` is a convenient base interface for components that are built from sources and



variant-aware. This is the typical case for a lot of software components, and therefore it should be in most of the cases the base type to be extended.

The core software model includes more types that can be used as base for extension. For example: `LibrarySpec` and `ApplicationSpec` can also be extended in this manner. These are no-op extensions of `GeneralComponentSpec` used to describe a software model better by distinguishing libraries and applications components. `TestSuiteSpec` should be used for all components that describe a test suite.

#### Example 647. Declare a custom component

**DocumentationComponent.groovy**

```
@Managed
interface DocumentationComponent extends GeneralComponentSpec {}
```

Types extending `ComponentSpec` are registered via a rule annotated with `ComponentType`:

#### Example 648. Register a custom component

**DocumentationPlugin.groovy**

```
class DocumentationPlugin extends RuleSource {
    @ComponentType
    void registerComponent(TypeBuilder<DocumentationComponent> builder) {}
}
```

§

## Binaries

To declare a custom binary type one must extend `BinarySpec`.

#### Example 649. Declare a custom binary

**DocumentationBinary.groovy**

```
@Managed
interface DocumentationBinary extends BinarySpec {
    File getOutputDir()
    void setOutputDir(File outputDir)
}
```

Types extending `BinarySpec` are registered via a rule annotated with `ComponentType`:

#### Example 650. Register a custom binary

**DocumentationPlugin.groovy**

```
class DocumentationPlugin extends RuleSource {
    @ComponentType
    void registerBinary(TypeBuilder<DocumentationBinary> builder) {}
}
```

§

## Source sets

To declare a custom source set type one must extend `LanguageSourceSet`.

### Example 651. Declare a custom source set

**MarkdownSourceSet.groovy**

```
@Managed
interface MarkdownSourceSet extends LanguageSourceSet {
    boolean isGenerateIndex()
    void setGenerateIndex(boolean generateIndex)

    boolean isSmartQuotes()
    void setSmartQuotes(boolean smartQuotes)
}
```

Types extending `LanguageSourceSet` are registered via a rule annotated with `ComponentType`:

### Example 652. Register a custom source set

**MarkdownPlugin.groovy**

```
class MarkdownPlugin extends RuleSource {
    @ComponentType
    void registerMarkdownLanguage(TypeBuilder<MarkdownSourceSet> builder) {}
}
```

Setting the *language name* is mandatory.

§

## Putting it all together

§

### Generating binaries from components

Binaries generation from components is done via rules annotated with `ComponentBinaries`. This rule generates a `DocumentationBinary` named `exploded` for each `DocumentationComponent` and sets its `outputDir` property:

#### Example 653. Generates documentation binaries

##### DocumentationPlugin.groovy

```
class DocumentationPlugin extends RuleSource {
    @ComponentBinaries
    void generateDocBinaries(ModelMap<DocumentationBinary> binaries, VariantComponent<DocumentationComponent> components) {
        binaries.create("exploded") { binary ->
            outputDir = new File(buildDir, "${component.name}/${binary.name}")
        }
    }
}
```

§

### Generating tasks from binaries

Tasks generation from binaries is done via rules annotated with `BinaryTasks`. This rule generates a `Copy` task for each `TextSourceSet` of each `DocumentationBinary`:

#### Example 654. Generates tasks for text source sets

##### DocumentationPlugin.groovy

```
class DocumentationPlugin extends RuleSource {
    @BinaryTasks
    void generateTextTasks(ModelMap<Task> tasks, final DocumentationBinary binary) {
        binary.inputs.withType(TextSourceSet) { textSourceSet ->
            def taskName = binary.tasks.taskName("compile", textSourceSet.name)
            def outputDir = new File(binary.outputDir, textSourceSet.name)
            tasks.create(taskName, Copy) {
                from textSourceSet.source
                destinationDir = outputDir
            }
        }
    }
}
```

This rule generates a `MarkdownCompileTask` task for each `MarkdownSourceSet` of each `DocumentationBinary`:

## Example 655. Register a custom source set

### MarkdownPlugin.groovy

```
class MarkdownPlugin extends RuleSource {
    @BinaryTasks
    void processMarkdownDocumentation(ModelMap<Task> tasks, final DocumentationB
        binary.inputs.withType(MarkdownSourceSet) { markdownSourceSet ->
            def taskName = binary.tasks.taskName("compile", markdownSourceSet.name)
            def outputDir = new File(binary.outputDir, markdownSourceSet.name)
            tasks.create(taskName, MarkdownHtmlCompile) { compileTask ->
                compileTask.source = markdownSourceSet.source
                compileTask.destinationDir = outputDir
                compileTask.smartQuotes = markdownSourceSet.smartQuotes
                compileTask.generateIndex = markdownSourceSet.generateIndex
            }
        }
    }
}
```

See the sample source for more on the `MarkdownCompileTask` task.

\$

### Using your custom model

This build script demonstrate usage of the custom model defined in the sections above:

### Example 656. an example of using a custom software model

#### build.gradle

```
import sample.documentation.DocumentationComponent
import sample.documentation.TextSourceSet
import sample.markdown.MarkdownSourceSet

apply plugin:sample.documentation.DocumentationPlugin
apply plugin:sample.markdown.MarkdownPlugin

model {
    components {
        docs(DocumentationComponent) {
            sources {
                reference(TextSourceSet)
                userguide(MarkdownSourceSet) {
                    generateIndex = true
                    smartQuotes = true
                }
            }
        }
    }
}
```

**Note:** The code for this example can be found at `samples/customModel/languageType/` in the ‘all’ distribution of Gradle.

And in the components reports for such a build script we can see our model types properly registered:

### Example 657. components report

#### Output of `gradle -q components`

```
> gradle -q components
```

```
-----  
Root project  
-----
```

```
DocumentationComponent 'docs'  
-----
```

#### Source sets

```
    Markdown source 'docs:userguide'  
        srcDir: src/docs/userguide  
    Text source 'docs:reference'  
        srcDir: src/docs/reference
```

#### Binaries

```
    DocumentationBinary 'docs:exploded'  
        build using task: :docsExploded
```

Note: currently not all plugins register their components, so some components may

## §

### About internal views

Internal views can be added to an already registered type or to a new custom type. In other words, using internal views, you can attach extra properties to already registered components, binaries and source sets types like `JvmLibrarySpec`, `JarBinarySpec` or `JavaSourceSet` and to the custom types you write.

Let's start with a simple component public type and its internal view declarations:

### Example 658. public type and internal view declaration

#### **build.gradle**

```
@Managed interface MyComponent extends ComponentSpec {  
    String getPublicData()  
    void setPublicData(String data)  
}  
  
@Managed interface MyComponentInternal extends MyComponent {  
    String getInternalData()  
    void setInternalData(String internal)  
}
```

The type registration is as follows:

### Example 659. type registration

#### build.gradle

```
class MyPlugin extends RuleSource {
    @ComponentType
    void registerMyComponent(TypeBuilder<MyComponent> builder) {
        builder.internalView(MyComponentInternal)
    }
}
```

The `internalView(type)` method of the type builder can be called several times. This is how you would add several internal views to a type.

Now, let's mutate both public and internal data using some rule:

### Example 660. public and internal data mutation

#### build.gradle

```
class MyPlugin extends RuleSource {
    @Mutate
    void mutateMyComponents(ModelMap<MyComponentInternal> components) {
        components.all { component ->
            component.publicData = "Some PUBLIC data"
            component.internalData = "Some INTERNAL data"
        }
    }
}
```

Our `internalData` property should not be exposed to build logic. Let's check this using the `model` task on the following build file:

### Example 661. example build script and model report output

#### build.gradle

```
apply plugin: MyPlugin
model {
    components {
        my(MyComponent)
    }
}
```

#### Output of `gradle -q model`

```
> gradle -q model
```

```
-----
Root project
-----
```

```
+ components
```

```

| Type:      org.gradle.platform.base.ComponentSpecContainer
| Creator:    ComponentBasePlugin.PluginRules#components(ComponentSpecCon
| Rules:
    components { ... } @ build.gradle line 42, column 5
    MyPlugin#mutateMyComponents(ModelMap<MyComponentInternal>)
+ my
| Type:      MyComponent
| Creator:    components { ... } @ build.gradle line 42, column 5 > c:
| Rules:
    MyPlugin#mutateMyComponents(ModelMap<MyComponentInternal>) > all()
+ publicData
| Type:      java.lang.String
| Value:      Some PUBLIC data
| Creator:    components { ... } @ build.gradle line 42, column 5
+ tasks
| Type:      org.gradle.model.ModelMap<org.gradle.api.Task>
| Creator:    Project.<init>.tasks()
+ assemble
| Type:      org.gradle.api.DefaultTask
| Value:      task ':assemble'
| Creator:    Project.<init>.tasks.assemble()
| Rules:
    copyToTaskContainer
+ build
| Type:      org.gradle.api.DefaultTask
| Value:      task ':build'
| Creator:    Project.<init>.tasks.build()
| Rules:
    copyToTaskContainer
+ buildEnvironment
| Type:      org.gradle.api.tasks.diagnostics.BuildEnvironmentReportT
| Value:      task ':buildEnvironment'
| Creator:    Project.<init>.tasks.buildEnvironment()
| Rules:
    copyToTaskContainer
+ check
| Type:      org.gradle.api.DefaultTask
| Value:      task ':check'
| Creator:    Project.<init>.tasks.check()
| Rules:
    copyToTaskContainer
+ clean
| Type:      org.gradle.api.tasks.Delete
| Value:      task ':clean'
| Creator:    Project.<init>.tasks.clean()
| Rules:
    copyToTaskContainer
+ components
| Type:      org.gradle.api.reporting.components.ComponentReport

```



```

    | Value:      task ':components'
    | Creator:    Project.<init>.tasks.components()
    | Rules:
      copyToTaskContainer
+ dependencies
    | Type:      org.gradle.api.tasks.diagnostics.DependencyReportTask
    | Value:      task ':dependencies'
    | Creator:    Project.<init>.tasks.dependencies()
    | Rules:
      copyToTaskContainer
+ dependencyInsight
    | Type:      org.gradle.api.tasks.diagnostics.DependencyInsightReportTask
    | Value:      task ':dependencyInsight'
    | Creator:    Project.<init>.tasks.dependencyInsight()
    | Rules:
      copyToTaskContainer
+ dependentComponents
    | Type:      org.gradle.api.reporting.dependents.DependentComponentsReportTask
    | Value:      task ':dependentComponents'
    | Creator:    Project.<init>.tasks.dependentComponents()
    | Rules:
      copyToTaskContainer
+ help
    | Type:      org.gradle.configuration.Help
    | Value:      task ':help'
    | Creator:    Project.<init>.tasks.help()
    | Rules:
      copyToTaskContainer
+ init
    | Type:      org.gradle.buildinit.tasks.InitBuild
    | Value:      task ':init'
    | Creator:    Project.<init>.tasks.init()
    | Rules:
      copyToTaskContainer
+ model
    | Type:      org.gradle.api.reporting.model.ModelReport
    | Value:      task ':model'
    | Creator:    Project.<init>.tasks.model()
    | Rules:
      copyToTaskContainer
+ projects
    | Type:      org.gradle.api.tasks.diagnostics.ProjectReportTask
    | Value:      task ':projects'
    | Creator:    Project.<init>.tasks.projects()
    | Rules:
      copyToTaskContainer
+ properties
    | Type:      org.gradle.api.tasks.diagnostics.PropertyReportTask
    | Value:      task ':properties'

```

```

    | Creator:      Project.<init>.tasks.properties()
    | Rules:
      copyToTaskContainer
+ tasks
    | Type:        org.gradle.api.tasks.diagnostics.TaskReportTask
    | Value:       task ':tasks'
    | Creator:     Project.<init>.tasks.tasks()
    | Rules:
      copyToTaskContainer
+ wrapper
    | Type:        org.gradle.api.tasks.wrapper.Wrapper
    | Value:       task ':wrapper'
    | Creator:     Project.<init>.tasks.wrapper()

```

```
| Rules:
    copyToTaskContainer
```

We can see in this report that `publicData` is present and that `internalData` is not.

# Glossary

# Dependency Management Terminology

Dependency management comes with a wealth of terminology. Here you can find the most commonly-used terms including references to the user guide to learn about their practical application.

§

## Configuration

A configuration is a named set of dependencies grouped together for a specific goal: For example the `implementation` configuration represents the set of dependencies required to compile a project. Configurations provide access to the underlying, resolved modules and their artifacts. For more information, see *Managing Dependency Configurations*.

**Note:** The word "configuration" is an overloaded term and has a different meaning outside of the context of dependency management.

§

## Dependency

A dependency is a pointer to another piece of software required to build, test or run a module. For more information, see *Declaring Dependencies*.

§

## Dependency constraint

A dependency constraint defines requirements that need to be met by a module to make it a valid resolution result for the dependency. For example, a dependency constraint can narrow down the set of supported module versions. Dependency constraints can be used to express such requirements for transitive dependencies. For more information, see the section called “Managing versions of transitive dependencies with dependency constraints”.

§

## Module

A piece of software that evolves over time e.g. Google Guava. Every module has a name. Each release of a module is optimally represented by a module version. For convenient consumption, modules can be hosted in a repository.

§

## Module metadata

Releases of a module can provide metadata. Metadata is the data that describes the module in more detail e.g. the coordinates for locating it in a repository, information about the project or required transitive dependencies. In Maven the metadata file is called `.pom`, in Ivy it is called `ivy.xml`.

§

## Module version

A module version represents a distinct set of changes of a released module. For example `18.0` represents the version of the module with the coordinates `com.google:guava:18.0`. In practice there's no limitation to the scheme of the module version. Timestamps, numbers, special suffixes like `-GA` are all allowed identifiers. The most widely-used versioning strategy is semantic versioning.

§

## Repository

A repository hosts a set of modules, each of which may provide one or many releases indicated by a module version. The repository can be based on a binary repository product (e.g. Artifactory or Nexus) or a directory structure in the filesystem. For more information, see *Declaring Repositories*.

§

## Resolution rule

A resolution rule influences the behavior of how a dependency is resolved. Resolution rules are defined as part of the build logic. For more information, see *Customizing Dependency Resolution Behavior*.

§

## Transitive dependency

A module can have dependencies on other modules to work properly, so-called transitive dependencies. Releases of a module hosted on a repository can provide metadata to declare those transitive dependencies. By default, Gradle resolves transitive dependencies automatically. However, the behavior is highly customizable. For more information, see *Managing Transitive Dependencies*.

# Dependency Types

§

## Module dependencies

Module dependencies are the most common dependencies. They refer to a module in a repository.

### Example 662. Module dependencies

#### build.gradle

```
dependencies {
    runtime group: 'org.springframework', name: 'spring-core', version: '2.5'
    runtime 'org.springframework:spring-core:2.5',
           'org.springframework:spring-aop:2.5'
    runtime(
        [group: 'org.springframework', name: 'spring-core', version: '2.5'],
        [group: 'org.springframework', name: 'spring-aop', version: '2.5']
    )
    runtime('org.hibernate:hibernate:3.0.5') {
        transitive = true
    }
    runtime group: 'org.hibernate', name: 'hibernate', version: '3.0.5', transitive = true
    runtime(group: 'org.hibernate', name: 'hibernate', version: '3.0.5') {
        transitive = true
    }
}
```

See the [DependencyHandler](#) class in the API documentation for more examples and a complete reference.

Gradle provides different notations for module dependencies. There is a string notation and a map notation. A module dependency has an API which allows further configuration. Have a look at [ExternalModuleDependency](#) to learn all about the API. This API provides properties and configuration methods. Via the string notation you can define a subset of the properties. With the map notation you can define all properties. To have access to the complete API, either with the map or with the string notation, you can assign a single dependency to a configuration together with a closure.

**Note:** If you declare a module dependency, Gradle looks for a module metadata file (`.module`, `.pom` or `ivy.xml`) in the repositories. If such a module metadata file exists, it is parsed and the artifacts

of this module (e.g. `hibernate-3.0.5.jar`) as well as its dependencies (e.g. `cglib`) are downloaded. If no such module metadata file exists, Gradle may look, depending on the metadata sources definitions, for an artifact file called `hibernate-3.0.5.jar` directly. In Maven, a module can have one and only one artifact. In Gradle and Ivy, a module can have multiple artifacts. Each artifact can have a different set of dependencies.

## §

### File dependencies

File dependencies allow you to directly add a set of files to a configuration, without first adding them to a repository. This can be useful if you cannot, or do not want to, place certain files in a repository. Or if you do not want to use any repositories at all for storing your dependencies.

To add some files as a dependency for a configuration, you simply pass a file collection as a dependency:

#### Example 663. File dependencies

##### **build.gradle**

```
dependencies {  
    runtime files('libs/a.jar', 'libs/b.jar')  
    runtime fileTree(dir: 'libs', include: '*.jar')  
}
```

File dependencies are not included in the published dependency descriptor for your project. However, file dependencies are included in transitive project dependencies within the same build. This means they cannot be used outside the current build, but they can be used with the same build.

You can declare which tasks produce the files for a file dependency. You might do this when, for example, the files are generated by the build.



#### Example 664. Generated file dependencies

##### build.gradle

```
dependencies {
    compile files("$buildDir/classes") {
        builtBy 'compile'
    }
}

task compile {
    doLast {
        println 'compiling classes'
    }
}

task list(dependsOn: configurations.compile) {
    doLast {
        println "classpath = ${configurations.compile.collect { File file -> file.name }}"
    }
}
```

##### Output of `gradle -q list`

```
> gradle -q list
compiling classes
classpath = [classes]
```

## §

### Project dependencies

Gradle distinguishes between external dependencies and dependencies on projects which are part of the same multi-project build. For the latter you can declare *project dependencies*.

#### Example 665. Project dependencies

##### build.gradle

```
dependencies {
    compile project(':shared')
}
```

For more information see the API documentation for [ProjectDependency](#).

Multi-project builds are discussed in *Authoring Multi-Project Builds*.

§

## Gradle distribution-specific dependencies

§

### Gradle API dependency

You can declare a dependency on the API of the current version of Gradle by using the `DependencyHandler.gradleApi()` method. This is useful when you are developing custom Gradle tasks or plugins.

#### Example 666. Gradle API dependencies

```
build.gradle
dependencies {
    compile gradleApi()
}
```

§

### Gradle TestKit dependency

You can declare a dependency on the TestKit API of the current version of Gradle by using the `DependencyHandler.gradleTestKit()` method. This is useful for writing and executing functional tests for Gradle plugins and build scripts.

#### Example 667. Gradle TestKit dependencies

```
build.gradle
dependencies {
    testCompile gradleTestKit()
}
```

*Testing Build Logic with TestKit* explains the use of TestKit by example.

§

### Local Groovy dependency

You can declare a dependency on the Groovy that is distributed with Gradle by using the `DependencyHandler.localGroovy()` method. This is useful when you are developing custom Gradle tasks or plugins in Groovy.

#### Example 668. Gradle's Groovy dependencies

```
build.gradle
dependencies {
    compile localGroovy()
}
```

# Repository Types

§

## Flat directory repository

Some projects might prefer to store dependencies on a shared drive or as part of the project source code instead of a binary repository product. If you want to use a (flat) filesystem directory as a repository, simply type:

### Example 669. Flat repository resolver

```
build.gradle
repositories {
    flatDir {
        dirs 'lib'
    }
    flatDir {
        dirs 'lib1', 'lib2'
    }
}
```

This adds repositories which look into one or more directories for finding dependencies. Note that this type of repository does not support any meta-data formats like Ivy XML or Maven POM files. Instead, Gradle will dynamically generate a module descriptor (without any dependency information) based on the presence of artifacts. However, as Gradle prefers to use modules whose descriptor has been created from real meta-data rather than being generated, flat directory repositories cannot be used to override artifacts with real meta-data from other repositories. For example, if Gradle finds only `jmxri-1.2.1.jar` in a flat directory repository, but `jmxri-1.2.1.pom` in another repository that supports meta-data, it will use the second repository to provide the module.

For the use case of overriding remote artifacts with local ones consider using an Ivy or Maven repository instead whose URL points to a local directory. If you only work with flat directory repositories you don't need to set all attributes of a dependency.

§

## Maven Central repository

Maven Central is a popular repository hosting open source libraries for consumption by Java projects.

To declare the central Maven repository for your build add this to your script:

#### Example 670. Adding central Maven repository

```
build.gradle
repositories {
    mavenCentral()
}
```

§

## JCenter Maven repository

Bintray's JCenter is an up-to-date collection of all popular Maven OSS artifacts, including artifacts published directly to Bintray.

To declare the JCenter Maven repository add this to your build script:

#### Example 671. Adding Bintray's JCenter Maven repository

```
build.gradle
repositories {
    jcenter()
}
```

§

## Google Maven repository

The Google repository hosts Android-specific artifacts including the Android SDK. For usage examples, see the relevant documentation.

To declare the Google Maven repository add this to your build script:

#### Example 672. Adding Google Maven repository

```
build.gradle
repositories {
    google()
}
```

§

## Local Maven repository

Gradle can consume dependencies available in the local Maven repository. Declaring this repository is beneficial for teams that publish to the local Maven repository with one project and consume the artifacts by Gradle in another project.

|

**Note:** Gradle stores resolved dependencies in its own cache. A build does not need to declare the local Maven repository even if you resolve dependencies from a Maven-based, remote repository.

To declare the local Maven cache as a repository add this to your build script:

#### Example 673. Adding the local Maven cache as a repository

```
build.gradle
repositories {
    mavenLocal()
}
```

Gradle uses the same logic as Maven to identify the location of your local Maven cache. If a local repository location is defined in a `settings.xml`, this location will be used. The `settings.xml` in `USER_HOME/.m2` takes precedence over the `settings.xml` in `M2_HOME/conf`. If no `settings.xml` is available, Gradle uses the default location `USER_HOME/.m2/repository`.

§

## Custom Maven repositories

Many organizations host dependencies in an in-house Maven repository only accessible within the company's network. Gradle can declare Maven repositories by URL.

For adding a custom Maven repository you can do:

#### Example 674. Adding custom Maven repository

```
build.gradle
repositories {
    maven {
        url "http://repo.mycompany.com/maven2"
    }
}
```

Sometimes a repository will have the POMs published to one location, and the JARs and other artifacts published at another location. To define such a repository, you can do:

### Example 675. Adding additional Maven repositories for JAR files

#### build.gradle

```
repositories {  
    maven {  
        // Look for POMs and artifacts, such as JARs, here  
        url "http://repo2.mycompany.com/maven2"  
        // Look for artifacts here if not found at the above location  
        artifactUrls "http://repo.mycompany.com/jars"  
        artifactUrls "http://repo.mycompany.com/jars2"  
    }  
}
```

Gradle will look at the first URL for the POM and the JAR. If the JAR can't be found there, the artifact URLs are used to look for JARs.

§

### Accessing password-protected Maven repositories

You can specify credentials for Maven repositories secured by basic authentication.

### Example 676. Accessing password-protected Maven repository

#### build.gradle

```
repositories {  
    maven {  
        url "http://repo.mycompany.com/maven2"  
        credentials {  
            username "user"  
            password "password"  
        }  
    }  
}
```

§

## Custom Ivy repositories

Organizations might decide to host dependencies in an in-house Ivy repository. Gradle can declare Ivy repositories by URL.

§

### Defining an Ivy repository with a standard layout

To declare an Ivy repository using the standard layout no additional customization is needed. You just declare the URL.

### Example 677. Ivy repository

**build.gradle**

```
repositories {  
    ivy {  
        url "http://repo.mycompany.com/repo"  
    }  
}
```

§

#### Defining a named layout for an Ivy repository

You can specify that your repository conforms to the Ivy or Maven default layout by using a named layout.

### Example 678. Ivy repository with named layout

**build.gradle**

```
repositories {  
    ivy {  
        url "http://repo.mycompany.com/repo"  
        layout "maven"  
    }  
}
```

Valid named layout values are 'gradle' (the default), 'maven', 'ivy' and 'pattern'. See [IvyArtifactRepository.layout\(java.lang.String, groovy.lang.Closure\)](#) in the API documentation for details of these named layouts.

§

#### Defining custom pattern layout for an Ivy repository

To define an Ivy repository with a non-standard layout, you can define a 'pattern' layout for the repository:

### Example 679. Ivy repository with pattern layout

**build.gradle**

```
repositories {  
    ivy {  
        url "http://repo.mycompany.com/repo"  
        layout "pattern", {  
            artifact "[module]/[revision]/[type]/[artifact].[ext]"  
        }  
    }  
}
```

To define an Ivy repository which fetches Ivy files and artifacts from different locations, you can define

separate patterns to use to locate the Ivy files and artifacts:

Each `artifact` or `ivy` specified for a repository adds an *additional* pattern to use. The patterns are used in the order that they are defined.

#### Example 680. Ivy repository with multiple custom patterns

**build.gradle**

```
repositories {
    ivy {
        url "http://repo.mycompany.com/repo"
        layout "pattern", {
            artifact "3rd-party-artifacts/[organisation]/[module]/[revision]/[artifact]"
            artifact "company-artifacts/[organisation]/[module]/[revision]/[artifact]"
            ivy "ivy-files/[organisation]/[module]/[revision]/ivy.xml"
        }
    }
}
```

Optionally, a repository with pattern layout can have its `'organisation'` part laid out in Maven style, with forward slashes replacing dots as separators. For example, the organisation `my.company` would then be represented as `my/company`.

#### Example 681. Ivy repository with Maven compatible layout

**build.gradle**

```
repositories {
    ivy {
        url "http://repo.mycompany.com/repo"
        layout "pattern", {
            artifact "[organisation]/[module]/[revision]/[artifact]-[revision].[extension]"
            m2compatible = true
        }
    }
}
```

§

### Accessing password-protected Ivy repositories

You can specify credentials for Ivy repositories secured by basic authentication.



### Example 682. Ivy repository with authentication

**build.gradle**

```
repositories {
    ivy {
        url "http://repo.mycompany.com"
        credentials {
            username "user"
            password "password"
        }
    }
}
```

§

## Supported metadata sources

When searching for a module in a repository, Gradle, by default, checks for supported metadata file formats in that repository. In a Maven repository, Gradle looks for a `.pom` file, in an ivy repository it looks for an `ivy.xml` file and in a flat directory repository it looks directly for `.jar` files as it does not expect any metadata. Starting with 5.0, Gradle also looks for `.module` (Gradle module metadata) files.

However, if you define a customized repository you might want to configure this behavior. For example, you can define a Maven repository without `.pom` files but only jars. To do so, you can configure *metadata sources* for any repository.

### Example 683. Maven repository that supports artifacts without metadata

**build.gradle**

```
repositories {
    maven {
        url "http://repo.mycompany.com/repo"
        metadataSources {
            mavenPom()
            artifact()
        }
    }
}
```

You can specify multiple sources to tell Gradle to keep looking if a file was not found. In that case, the order of checking for sources is predefined.

The following metadata sources are supported:

**Table 89. Repository transport protocols**

Metadata source	Description	Order	Maven	Ivy / flat dir
<code>gradleMetadata()</code>	Look for Gradle <code>.module</code> files	1st	yes	yes
<code>mavenPom()</code>	Look for Maven <code>.pom</code> files	2nd	yes	yes
<code>ivyDescriptor()</code>	Look for <code>ivy.xml</code> files	2nd	no	yes
<code>artifact()</code>	Look directly for artifact	3rd	yes	yes

**Note:** The defaults for Ivy and Maven repositories change with Gradle 5.0. Before 5.0, `artifact()` was included in the defaults. Leading to some inefficiency when modules are missing completely. To restore this behavior, for example, for Maven central you can use `mavenCentral { mavenPom(); artifact(); }`. In a similar way, you can opt into the new behavior in older Gradle versions using `mavenCentral { }`.

## §

### Supported repository transport protocols

Maven and Ivy repositories support the use of various transport protocols. At the moment the following protocols are supported:

**Table 90. Repository transport protocols**

type	Credential types
<code>file</code>	none
<code>http</code>	username/password
<code>https</code>	username/password
<code>ftp</code>	username/password
<code>3</code>	access key/secret key/session token or Environment variables
<code>oss</code>	default application credentials sourced from well known files, Environment variables etc.

**Note:** Username and password should never be checked in plain text into version control as part of your build file. You can store the credentials in a local `gradle.properties` file and use one of the open source Gradle plugins for encrypting and consuming credentials e.g. the credentials plugin.

The transport protocol is part of the URL definition for a repository. The following build script demonstrates how to create a HTTP-based Maven and Ivy repository:

#### Example 684. Declaring a Maven and Ivy repository

```
build.gradle
repositories {
    maven {
        url "http://repo.mycompany.com/maven2"
    }

    ivy {
        url "http://repo.mycompany.com/repo"
    }
}
```

The following example shows how to declare SFTP repositories:

#### Example 685. Using the SFTP protocol for a repository

```
build.gradle
repositories {
    maven {
        url "sftp://repo.mycompany.com:22/maven2"
        credentials {
            username "user"
            password "password"
        }
    }

    ivy {
        url "sftp://repo.mycompany.com:22/repo"
        credentials {
            username "user"
            password "password"
        }
    }
}
```

When using an AWS S3 backed repository you need to authenticate using [AwsCredentials](#), providing access-key and a private-key. The following example shows how to declare a S3 backed repository and providing AWS credentials:

#### Example 686. Declaring a S3 backed Maven and Ivy repository

##### build.gradle

```
repositories {
    maven {
        url "s3://myCompanyBucket/maven2"
        credentials(AwsCredentials) {
            accessKey "someKey"
            secretKey "someSecret"
            // optional
            sessionToken "someSTSToken"
        }
    }

    ivy {
        url "s3://myCompanyBucket/ivyrepo"
        credentials(AwsCredentials) {
            accessKey "someKey"
            secretKey "someSecret"
            // optional
            sessionToken "someSTSToken"
        }
    }
}
```

You can also delegate all credentials to the AWS sdk by using the `AwsIamAuthentication`. The following example shows how:

#### Example 687. Declaring a S3 backed Maven and Ivy repository using IAM

##### build.gradle

```
repositories {
    maven {
        url "s3://myCompanyBucket/maven2"
        authentication {
            awsIm(AwsImAuthentication) // load from EC2 role or env var
        }
    }

    ivy {
        url "s3://myCompanyBucket/ivyrepo"
        authentication {
            awsIm(AwsImAuthentication)
        }
    }
}
```

When using a Google Cloud Storage backed repository default application credentials will be used with no further configuration required:

## Example 688. Declaring a Google Cloud Storage backed Maven and Ivy repository using default applic

### build.gradle

```
repositories {
    maven {
        url "gcs://myCompanyBucket/maven2"
    }

    ivy {
        url "gcs://myCompanyBucket/ivyrepo"
    }
}
```

§

### S3 configuration properties

The following system properties can be used to configure the interactions with s3 repositories:

**Table 91. S3 configuration properties**

roperty	Description
g.gradle.s3.endpoint	Used to override the AWS S3 endpoint when using a non AWS, S3 API compatible, storage service.
g.gradle.s3.maxErrorRetry	Specifies the maximum number of times to retry a request in the event that the S3 server responds with a HTTP 5xx status code. When not specified a default value of 3 is used.

§

### S3 URL formats

S3 URL's are 'virtual-hosted-style' and must be in the following format `s3://<bucketName>[.<regionSpe`

e.g. `s3://myBucket.s3.eu-central-1.amazonaws.com/maven/release`

`myBucket` is the AWS S3 bucket name.

`s3.eu-central-1.amazonaws.com` is the *optional* region specific endpoint.

`/maven/release` is the AWS S3 key (unique identifier for an object within a bucket)

§

### S3 proxy settings

A proxy for S3 can be configured using the following system properties:

`https.proxyHost`

`https.proxyPort`

`https.proxyUser`

`https.proxyPassword`

`http.nonProxyHosts`

If the 'org.gradle.s3.endpoint' property has been specified with a http (not https) URI the following system proxy settings can be used:

`http.proxyHost`

`http.proxyPort`

`http.proxyUser`

`http.proxyPassword`

`http.nonProxyHosts`

§

### AWS S3 V4 Signatures (AWS4-HMAC-SHA256)

Some of the AWS S3 regions (eu-central-1 - Frankfurt) require that all HTTP requests are signed in accordance with AWS's signature version 4. It is recommended to specify S3 URL's containing the region specific endpoint when using buckets that require V4 signatures. e.g. `s3://somebucket.s3.eu-central`

**Note:** When a region-specific endpoint is not specified for buckets requiring V4 Signatures, Gradle will use the default AWS region (us-east-1) and the following warning will appear on the console:

Attempting to re-send the request to .... with AWS V4 authentication. To avoid this warning in the future, use region-specific endpoint to access buckets located in regions that require V4 signing.

Failing to specify the region-specific endpoint for buckets requiring V4 signatures means:

- **Note:** 3 round-trips to AWS, as opposed to one, for every file upload and download.
- **Note:** Depending on location - increased network latencies and slower builds.
- **Note:** Increased likelihood of transmission failures.

§

### Google Cloud Storage configuration properties

The following system properties can be used to configure the interactions with Google Cloud Storage repositories:

**Table 92. Google Cloud Storage configuration properties**

Property	Description
<code>g.gradle.gcs.endpoint</code>	Used to override the Google Cloud Storage endpoint when using a non-Google Cloud Platform, Google Cloud Storage API compatible, storage service.
<code>g.gradle.gcs.servicePath</code>	Used to override the Google Cloud Storage root service path which the Google Cloud Storage client builds requests from, defaults to <code>/</code> .

§

## Google Cloud Storage URL formats

Google Cloud Storage URL's are 'virtual-hosted-style' and must be in the following format `gcs://<bucketN`

e.g. `gcs://myBucket/maven/release`

`myBucket` is the Google Cloud Storage bucket name.

`/maven/release` is the Google Cloud Storage key (unique identifier for an object within a bucket)

§

## Configuring HTTP authentication schemes

When configuring a repository using HTTP or HTTPS transport protocols, multiple authentication schemes are available. By default, Gradle will attempt to use all schemes that are supported by the Apache HttpClient library, documented here. In some cases, it may be preferable to explicitly specify which authentication schemes should be used when exchanging credentials with a remote server. When explicitly declared, only those schemes are used when authenticating to a remote repository. The following example show how to configure a repository to use only digest authentication:

### Example 689. Configure repository to use only digest authentication

**build.gradle**

```
repositories {
    maven {
        url 'https://repo.mycompany.com/maven2'
        credentials {
            username "user"
            password "password"
        }
        authentication {
            digest(DigestAuthentication)
        }
    }
}
```

Currently supported authentication schemes are:

**Table 93. Authentication schemes**

type	Description
<code>basicAuthentication</code>	Basic access authentication over HTTP. When using this scheme, credentials are sent preemptively.
<code>digestAuthentication</code>	Digest access authentication over HTTP.

§

### Using preemptive authentication

Gradle's default behavior is to only submit credentials when a server responds with an authentication challenge in the form of a HTTP 401 response. In some cases, the server will respond with a different code (ex. for repositories hosted on GitHub a 404 is returned) causing dependency resolution to fail. To get around this behavior, credentials may be sent to the server preemptively. To enable preemptive authentication simply configure your repository to explicitly use the `BasicAuthentication` scheme:

#### Example 690. Configure repository to use preemptive authentication

##### **build.gradle**

```
repositories {
    maven {
        url 'https://repo.mycompany.com/maven2'
        credentials {
            username "user"
            password "password"
        }
        authentication {
            basic(BasicAuthentication)
        }
    }
}
```



# The Dependency Cache

Gradle contains a highly sophisticated dependency caching mechanism, which seeks to minimise the number of remote requests made in dependency resolution, while striving to guarantee that the results of dependency resolution are correct and reproducible.

The Gradle dependency cache consists of two storage types located under `GRADLE_USER_HOME/caches`:

A file-based store of downloaded artifacts, including binaries like jars as well as raw downloaded meta-data like POM files and Ivy files. The storage path for a downloaded artifact includes the SHA1 checksum, meaning that 2 artifacts with the same name but different content can easily be cached.

A binary store of resolved module meta-data, including the results of resolving dynamic versions, module descriptors, and artifacts.

The Gradle cache does not allow the local cache to hide problems and create other mysterious and difficult to debug behavior. Gradle enables reliable and reproducible enterprise builds with a focus on bandwidth and storage efficiency.

## §

### Separate metadata cache

Gradle keeps a record of various aspects of dependency resolution in binary format in the metadata cache. The information stored in the metadata cache includes:

The result of resolving a dynamic version (e.g. `1.+`) to a concrete version (e.g. `1.2`).

The resolved module metadata for a particular module, including module artifacts and module dependencies.

The resolved artifact metadata for a particular artifact, including a pointer to the downloaded artifact file.

The *absence* of a particular module or artifact in a particular repository, eliminating repeated attempts to access a resource that does not exist.

Every entry in the metadata cache includes a record of the repository that provided the information as well as a timestamp that can be used for cache expiry.

§

## Repository caches are independent

As described above, for each repository there is a separate metadata cache. A repository is identified by its URL, type and layout. If a module or artifact has not been previously resolved from *this repository*, Gradle will attempt to resolve the module against the repository. This will always involve a remote lookup on the repository, however in many cases no download will be required.

Dependency resolution will fail if the required artifacts are not available in any repository specified by the build, even if the local cache has a copy of this artifact which was retrieved from a different repository. Repository independence allows builds to be isolated from each other in an advanced way that no build tool has done before. This is a key feature to create builds that are reliable and reproducible in any environment.

§

## Artifact reuse

Before downloading an artifact, Gradle tries to determine the checksum of the required artifact by downloading the sha file associated with that artifact. If the checksum can be retrieved, an artifact is not downloaded if an artifact already exists with the same id and checksum. If the checksum cannot be retrieved from the remote server, the artifact will be downloaded (and ignored if it matches an existing artifact).

As well as considering artifacts downloaded from a different repository, Gradle will also attempt to reuse artifacts found in the local Maven Repository. If a candidate artifact has been downloaded by Maven, Gradle will use this artifact if it can be verified to match the checksum declared by the remote server.

§

## Checksum based storage

It is possible for different repositories to provide a different binary artifact in response to the same artifact identifier. This is often the case with Maven SNAPSHOT artifacts, but can also be true for any artifact which is republished without changing its identifier. By caching artifacts based on their SHA1 checksum, Gradle is able to maintain multiple versions of the same artifact. This means that when resolving against one repository Gradle will never overwrite the cached artifact file from a different repository. This is done without requiring a separate artifact file store per repository.

§

## Cache Locking

The Gradle dependency cache uses file-based locking to ensure that it can safely be used by multiple Gradle processes concurrently. The lock is held whenever the binary meta-data store is being read or written, but is released for slow operations such as downloading remote artifacts.

# Appendix

## Gradle Samples

Listed below are some of the stand-alone samples which are included in the Gradle distribution. You can find these samples in the `GRADLE_HOME/samples` directory of the distribution.

**Table A.1. Samples included in the distribution**

Sample	Description
<code>announce</code>	A project which uses the announce plugin
<code>application</code>	A project which uses the application plugin
<code>buildCache/build-src</code>	Configure the build cache consistently for <code>buildSrc</code> and the main build
<code>buildCache/configure-built-in-caches</code>	Configuration options for the build cache
<code>buildCache/developer-ci-setup</code>	Recommended cache configuration: Developer push to a local build cache and pull from local and remote build cache, continuous integration server pushes to and pulls from the remote cache.
<code>buildCache/http-build-cache</code>	Use a remote HTTP build cache
<code>buildDashboard</code>	A project which uses the build-dashboard plugin
<code>codeQuality</code>	A project which uses the various code quality plugins.
<code>customBuildLanguage</code>	This sample demonstrates how to add some custom elements to the build DSL. It also demonstrates the use of custom plug-ins to organize build logic.
<code>customDistribution</code>	This sample demonstrates how to create a custom Gradle distribution and use it with the Gradle wrapper.
<code>customPlugin</code>	A set of projects that show how to implement, test, publish and use a custom plugin and task.

<code>ar/earCustomized/ear</code>	Web application ear project with customized contents
<code>ar/earWithWar</code>	Web application ear project
<code>roovy/crossCompilation</code>	A project doing cross compilation for a Groovy Project to Java 6
<code>roovy/customizedLayout</code>	Groovy project with a custom source layout
<code>roovy/mixedJavaAndGroovy</code>	Project containing a mix of Java and Groovy source
<code>roovy/multiproject</code>	Build made up of multiple Groovy projects. Also demonstrates how to exclude certain source files, and the use of a custom Groovy AST transformation.
<code>roovy/quickstart</code>	Groovy quickstart sample
<code>ava-library/multiproject</code>	Java Library multiproject
<code>ava-library/quickstart</code>	Java Library quickstart project
<code>ava/base</code>	Java base project
<code>ava/crossCompilation</code>	A project doing cross compilation to Java 6
<code>ava/customizedLayout</code>	Java project with a custom source layout
<code>ava/multiproject</code>	This sample demonstrates how an application can be composed using multiple Java projects.
<code>ava/quickstart</code>	Java quickstart project
<code>ava/withIntegrationTests</code>	This sample demonstrates how to use a source set to add an integration test suite to a Java project.
<code>avaGradlePlugin</code>	This example demonstrates the use of the java gradle plugin development plugin. By applying the plugin, the java plugin is automatically applied as well as the <code>gradleApi()</code> dependency. Furthermore, validations are performed against the plugin metadata during jar execution.
<code>aven/pomGeneration</code>	Demonstrates how to deploy and install to a Maven repository. Also demonstrates how to deploy a javadoc JAR along with the main JAR, how to customize the contents of the generated POM, and how to deploy snapshots and releases to different repositories.

<code>aven/quickstart</code>	Demonstrates how to deploy and install artifacts to a Maven repository.
<code>sgi</code>	A project which builds an OSGi bundle
<code>ugins</code>	A set of projects that show how to implement, test, publish and use a custom plugins with the latest technology.
<code>roviders/fileAndDirectoryProperty</code>	A set of examples using the Provider API for File-like properties
<code>roviders/implicitTaskDependency</code>	An example project using the Provider API to model the relationship between a producer and consumer task.
<code>roviders/listProperty</code>	A set of examples using the Provider API for collection properties
<code>roviders/propertyAndProvider</code>	An example of using the Provider API with the Groovy Gradle DSL
<code>cala/crossCompilation</code>	A project doing cross compilation for a Scala project to Java 6
<code>cala/customizedLayout</code>	Scala project with a custom source layout
<code>cala/force</code>	Scala quickstart project
<code>cala/mixedJavaAndScala</code>	A project containing a mix of Java and Scala source.
<code>cala/quickstart</code>	Scala quickstart project
<code>cala/zinc</code>	Scala project using the Zinc based Scala compiler.
<code>esting/testReport</code>	Generates an HTML test report that includes the test results from all subprojects.
<code>oolingApi/customModel</code>	A sample of how a plugin can expose its own custom tooling model to tooling API clients.
<code>oolingApi/eclipse</code>	An application that uses the tooling API to build the Eclipse model for a project.
<code>oolingApi/idea</code>	An application that uses the tooling API to extract information needed by IntelliJ IDEA.
<code>oolingApi/model</code>	An application that uses the tooling API to build the model for a Gradle build.

<code>oolingApi/runBuild</code>	An application that uses the tooling API to run a Gradle task.
<code>serguide/distribution</code>	A project which uses the distribution plugin
<code>serguide/javaLibraryDistribution</code>	A project which uses the Java library distribution plugin
<code>ebApplication/customized</code>	Web application with customized WAR contents.
<code>ebApplication/quickstart</code>	Web application quickstart project

§

## Sample `customBuildLanguage`

This sample demonstrates how to add some custom elements to the build DSL. It also demonstrates the use of custom plug-ins to organize build logic.

The build is composed of 2 types of projects. The first type of project represents a product, and the second represents a product module. Each product includes one or more product modules, and each product module may be included in multiple products. That is, there is a many-to-many relationship between these products and product modules. For each product, the build produces a ZIP containing the runtime classpath for each product module included in the product. The ZIP also contains some product-specific files.

The custom elements can be seen in the build script for the product projects (for example, `basicEdition/1`). Notice that the build script uses the `product { }` element. This is a custom element.

The build scripts of each project contain only declarative elements. The bulk of the work is done by 2 custom plug-ins found in `buildSrc/src/main/groovy`.

§

## Sample `customDistribution`

This sample demonstrates how to create a custom Gradle distribution and use it with the Gradle wrapper.

This sample contains the following projects:

The `plugin` directory contains the project that implements a custom plugin, and bundles the plugin into a custom Gradle distribution.

The `consumer` directory contains the project that uses the custom distribution.

§

## Sample `customPlugin`

A set of projects that show how to implement, test, publish and use a custom plugin and task.

This sample contains the following projects:

The `plugin` directory contains the project that implements and publishes the plugin.

The `consumer` directory contains the project that uses the plugin.

§

## Sample `java/multiproject`

This sample demonstrates how an application can be composed using multiple Java projects.

This build creates a client-server application which is distributed as 2 archives. First, there is a client ZIP which includes an API JAR, which a 3rd party application would compile against, and a client runtime. Then, there is a server WAR which provides a web service.

§

## Sample `plugins`

A set of projects that show how to implement, test, publish and use a custom plugins with the latest technology.

This sample contains the following projects:

The `buildscript` directory contains a project that uses the old `buildscript` syntax for using plugins.

The `dsl` directory contains the a project that uses the new `plugins` syntax for using plugins.

The `publishing` directory contains a complete example of the modern publishing plugins working with the `java-gradle-plugin` to produce two plugins shipped in the same jar and being published to both an ivy and maven repository.

The `consuming` directory contains an example of resolving plugins from custom repositories instead the Gradle Plugin Portal.



## Potential Traps

§

### Groovy script variables

For Gradle users it is important to understand how Groovy deals with script variables. Groovy has two types of script variables. One with a local scope and one with a script-wide scope.

### Example B.1. Variables scope: local and script wide

#### scope.groovy

```
String localScope1 = 'localScope1'
def localScope2 = 'localScope2'
scriptScope = 'scriptScope'

println localScope1
println localScope2
println scriptScope

closure = {
    println localScope1
    println localScope2
    println scriptScope
}

def method() {
    try {
        localScope1
    } catch (MissingPropertyException e) {
        println 'localScope1NotAvailable'
    }
    try {
        localScope2
    } catch (MissingPropertyException e) {
        println 'localScope2NotAvailable'
    }
    println scriptScope
}

closure.call()
method()
```

#### Output of groovy scope.groovy

```
> groovy scope.groovy
localScope1
localScope2
scriptScope
localScope1
localScope2
scriptScope
localScope1NotAvailable
localScope2NotAvailable
scriptScope
```

Variables which are declared with a type modifier are visible within closures but not visible within methods.

§

## Configuration and execution phase

It is important to keep in mind that Gradle has a distinct configuration and execution phase (see *Build Lifecycle*).

### Example B.2. Distinct configuration and execution phase

#### **build.gradle**

```
def classesDir = file('build/classes')
classesDir.mkdirs()
task clean(type: Delete) {
    delete 'build'
}
task compile(dependsOn: 'clean') {
    doLast {
        if (!classesDir.isDirectory()) {
            println 'The class directory does not exist. I can not operate'
            // do something
        }
        // do something
    }
}
```

#### **Output of `gradle -q compile`**

```
> gradle -q compile
The class directory does not exist. I can not operate
```

As the creation of the directory happens during the configuration phase, the `clean` task removes the directory during the execution phase.

# The Feature Lifecycle

Gradle is under constant development and improvement. New versions are delivered on a regular and frequent basis (approximately every 6 weeks). Continuous improvement combined with frequent delivery allows new features to be made available to users early and for invaluable real world feedback to be incorporated into the development process. Getting new functionality into the hands of users regularly is a core value of the Gradle platform. At the same time, API and feature stability is taken very seriously and is also considered a core value of the Gradle platform. This is something that is engineered into the development process by design choices and automated testing, and is formalised by the section called “Backwards Compatibility Policy”.

The Gradle *feature lifecycle* has been designed to meet these goals. It also serves to clearly communicate to users of Gradle what the state of a feature is. The term *feature* typically means an API or DSL method or property in this context, but it is not restricted to this definition. Command line arguments and modes of execution (e.g. the Build Daemon) are two examples of other kinds of features.

## §

### States

Features can be in one of 4 states:

Internal

Incubating

Public

Deprecated

## §

### Internal

Internal features are not designed for public use and are only intended to be used by Gradle itself. They can change in any way at any point in time without any notice. Therefore, we recommend avoiding the use of such features. Internal features are not documented. If it appears in this User Guide, the DSL Reference or the API Reference documentation then the feature is not internal.

Internal features may evolve into public features.

§

## Incubating

Features are introduced in the *incubating* state to allow real world feedback to be incorporated into the feature before it is made public and locked down to provide backwards compatibility. It also gives users who are willing to accept potential future changes early access to the feature so they can put it into use immediately.

A feature in an incubating state may change in future Gradle versions until it is no longer incubating. Changes to incubating features for a Gradle release will be highlighted in the release notes for that release. The incubation period for new features varies depending on the scope, complexity and nature of the feature.

Features in incubation are clearly indicated to be so. In the source code, all methods/properties/classes that are incubating are annotated with `Incubating`, which is also used to specially mark them in the DSL and API references. If an incubating feature is discussed in this User Guide, it will be explicitly said to be in the incubating state.

§

## Public

The default state for a non-internal feature is *public*. Anything that is documented in the User Guide, DSL Reference or API references that is not explicitly said to be incubating or deprecated is considered public. Features are said to be *promoted* from an incubating state to public. The release notes for each release indicate which previously incubating features are being promoted by the release.

A public feature will *never* be removed or intentionally changed without undergoing deprecation. All public features are subject to the backwards compatibility policy.

§

## Deprecated

Some features will become superseded or irrelevant due to the natural evolution of Gradle. Such features will eventually be removed from Gradle after being *deprecated*. A deprecated feature will *never* be changed, until it is finally removed according to the backwards compatibility policy.

Deprecated features are clearly indicated to be so. In the source code, all methods/properties/classes that are deprecated are annotated with `@java.lang.Deprecated` which is reflected in the DSL and API references. In most cases, there is a replacement for the deprecated element, and this will be described in the documentation. Using a deprecated feature will also result in a runtime warning in Gradle's output.

Use of deprecated features should be avoided. The release notes for each release indicate any features that are being deprecated by the release.

## §

### Backwards Compatibility Policy

Gradle provides backwards compatibility across major versions (e.g. 1.x, 2.x, etc.). Once a public feature is introduced or promoted in a Gradle release it will remain indefinitely or until it is deprecated. Once deprecated, it may be removed in the next major release. Deprecated features may be supported across major releases, but this is not guaranteed.

## Documentation licenses

§

### Gradle Documentation

*Copyright © 2007-2016 Gradle, Inc.*

Copies of this document may be made for your own use and for distribution to others, provided that you do not charge any fee for such copies and further provided that each copy contains this Copyright Notice, whether distributed in print or electronically.

§

### Header link icon

*Copyright © 2011–2013 VisualEditor team.*

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

The Software is provided "as is", without warranty of any kind, express or implied, including but not limited to the warranties of merchantability, fitness for a particular purpose and noninfringement. In no event shall the authors or copyright holders be liable for any claim, damages or other liability, whether in an action of contract, tort or otherwise, arising from, out of or in connection with the Software or the use or other dealings in the Software.

